


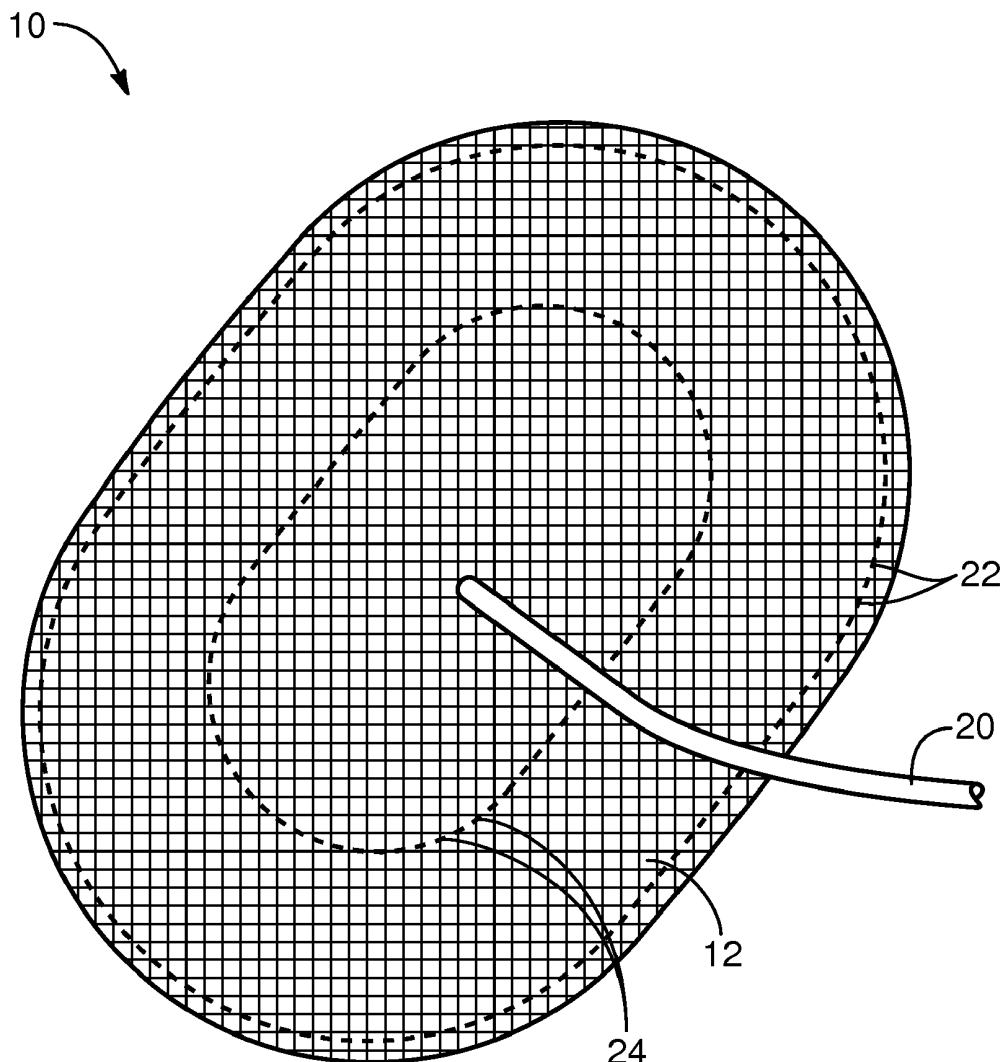

US 20120029540A1

(19) **United States**(12) **Patent Application Publication**
Adams(10) **Pub. No.: US 2012/0029540 A1**(43) **Pub. Date: Feb. 2, 2012**(54) **INFLATABLE HERNIA PATCH**(52) **U.S. Cl. 606/151**(76) **Inventor:** **Jason P. Adams**, Manhattan, NY
(US)(21) **Appl. No.:** **13/207,281**(22) **Filed:** **Aug. 10, 2011****Related U.S. Application Data**(63) Continuation of application No. 12/478,482, filed on
Jun. 4, 2009, now Pat. No. 8,002,844.**Publication Classification**(51) **Int. Cl.**
A61B 17/03 (2006.01)(57) **ABSTRACT**

A patch for repairing an intra-abdominal defect is disclosed in one embodiment of the present invention as including a mesh layer providing a grid of material perforated by apertures through the mesh. This mesh is used to reinforce an area around an intra-abdominal defect. A containment layer is secured proximate an edge of the mesh layer. A filler is distributed across the apertures of the mesh to contain a fluid from passing through the mesh. The mesh layer, containment layer, and filler are connected to form a chamber to selectively expand upon receipt of a quantity of fluid between the containment layer and the filler.



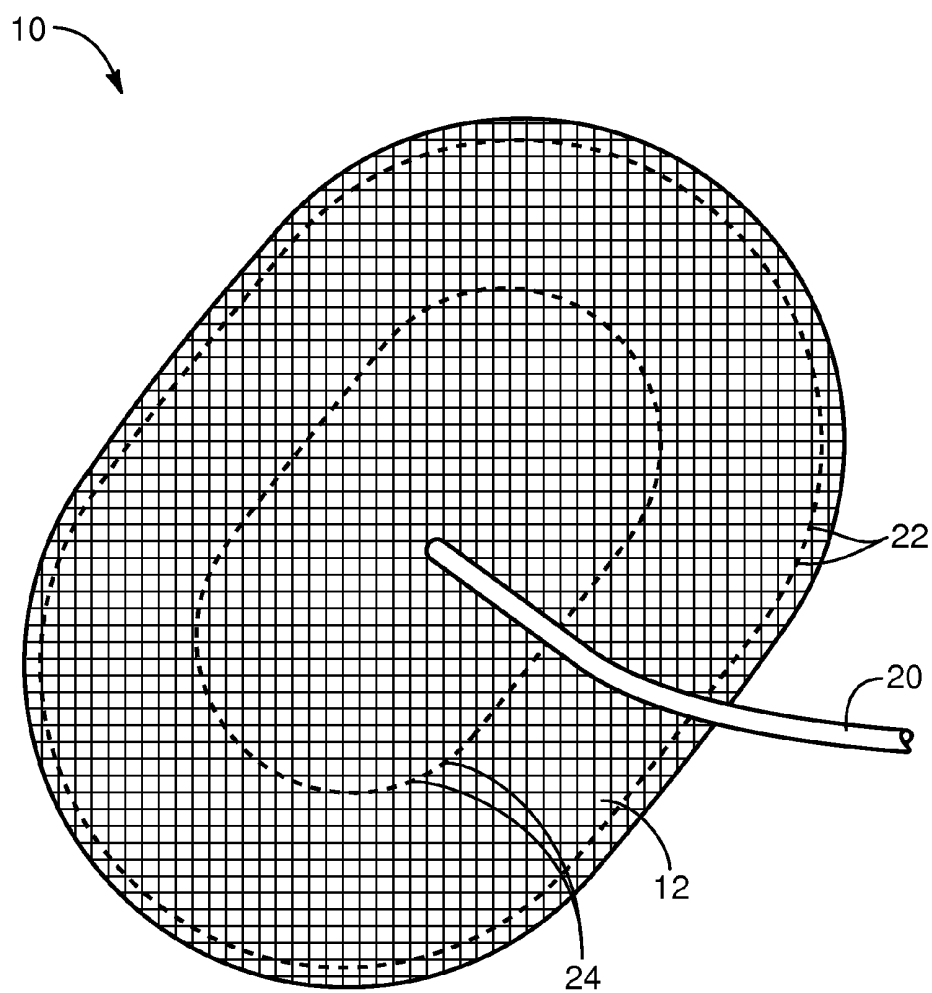


FIG. 1

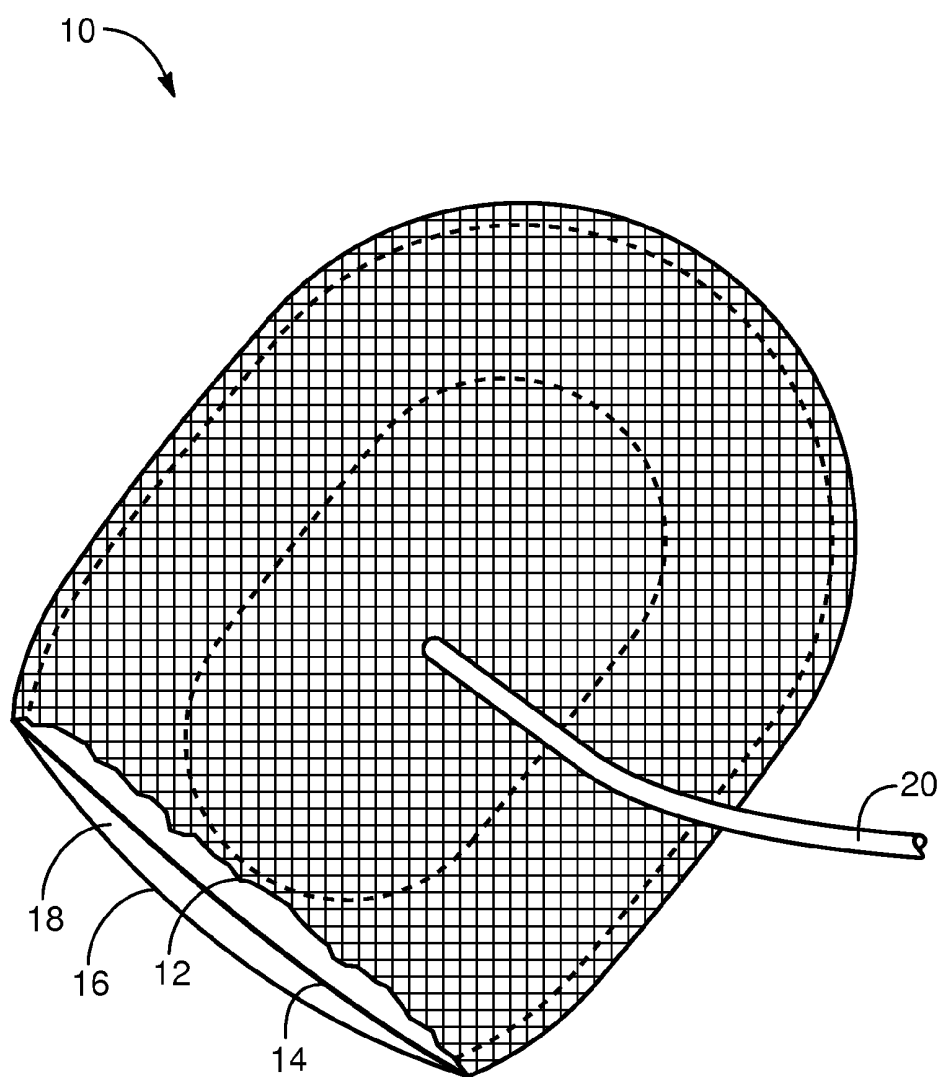


FIG. 2

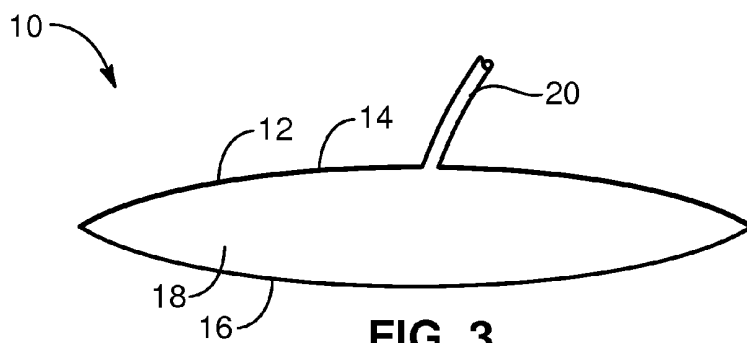


FIG. 3

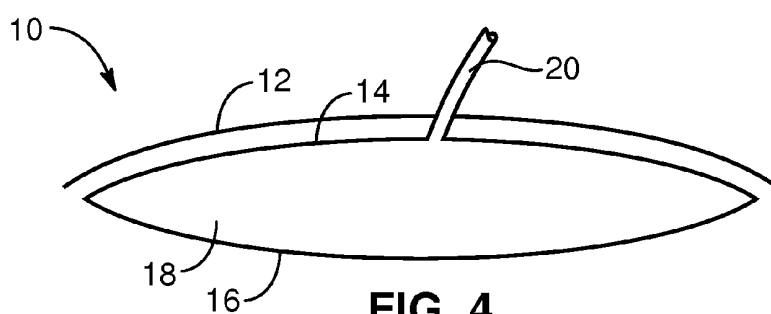


FIG. 4

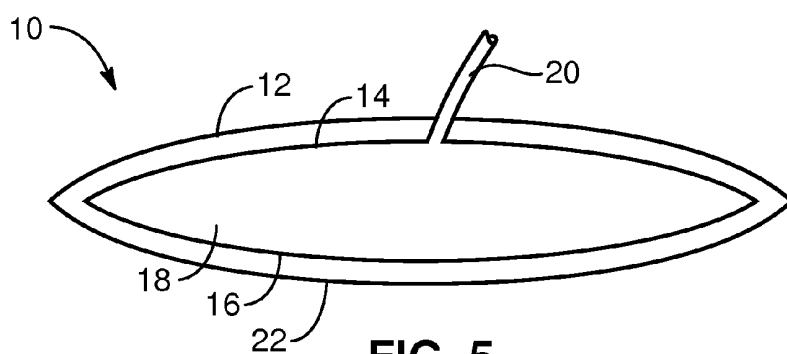


FIG. 5

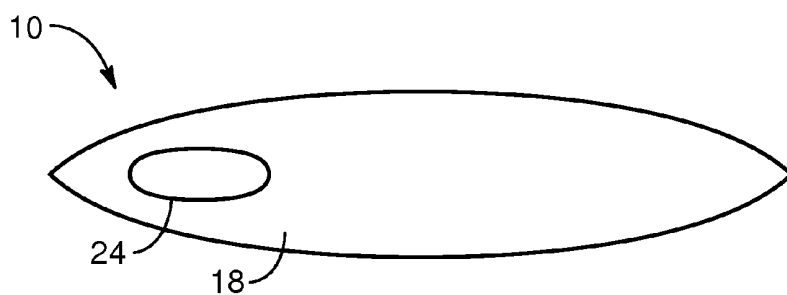


FIG. 6

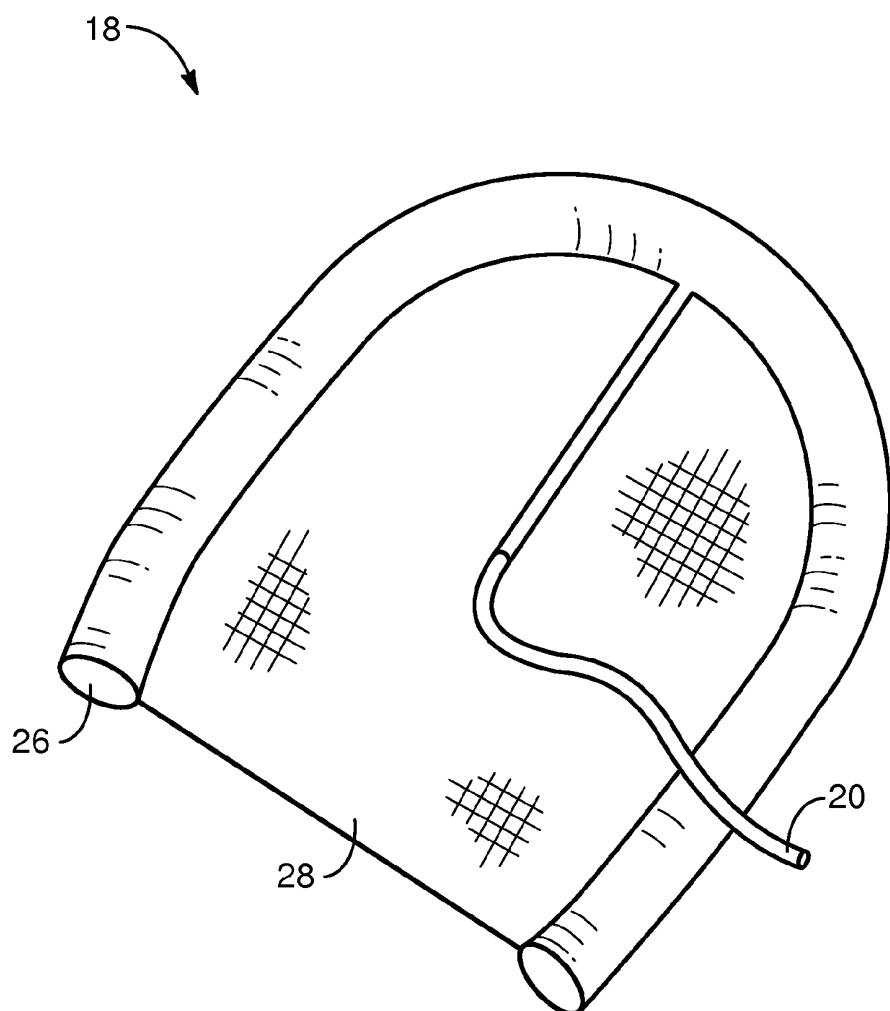


FIG. 7

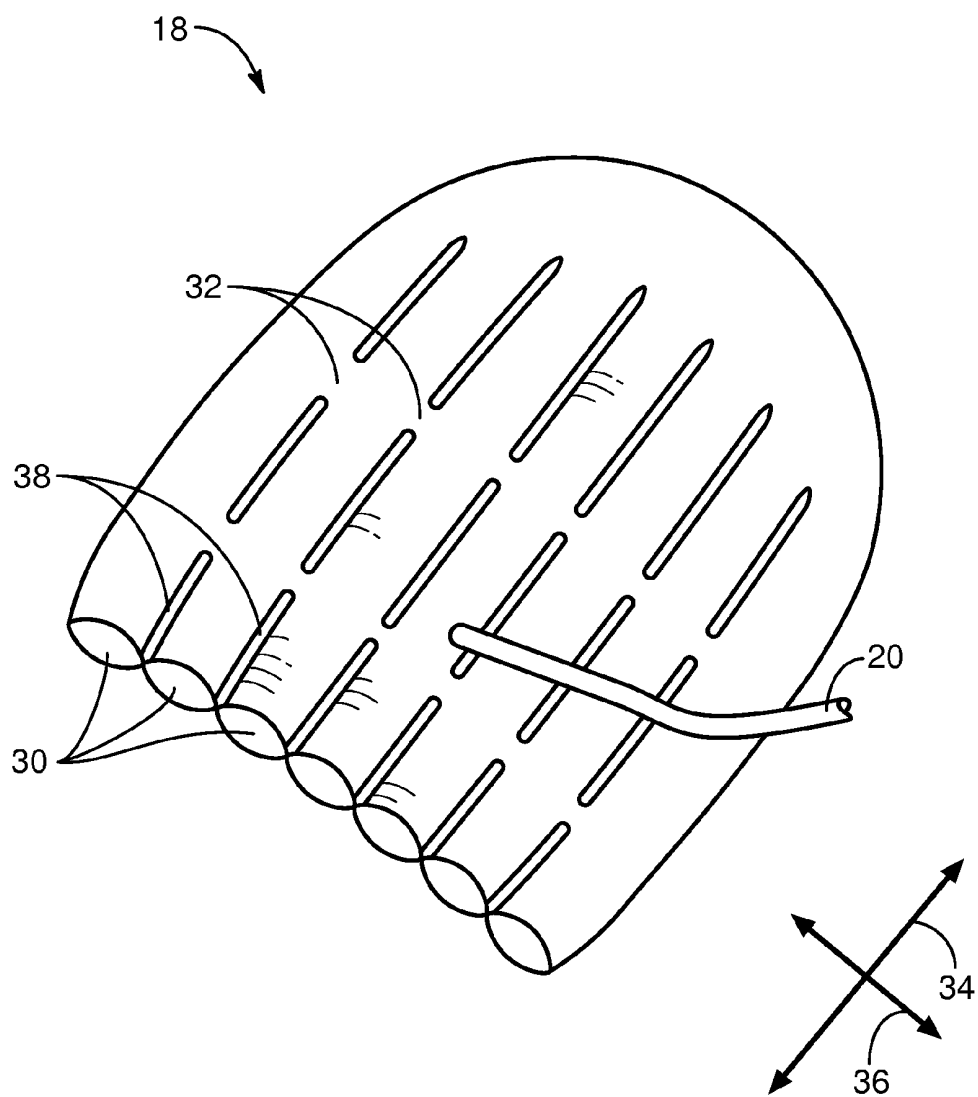


FIG. 8

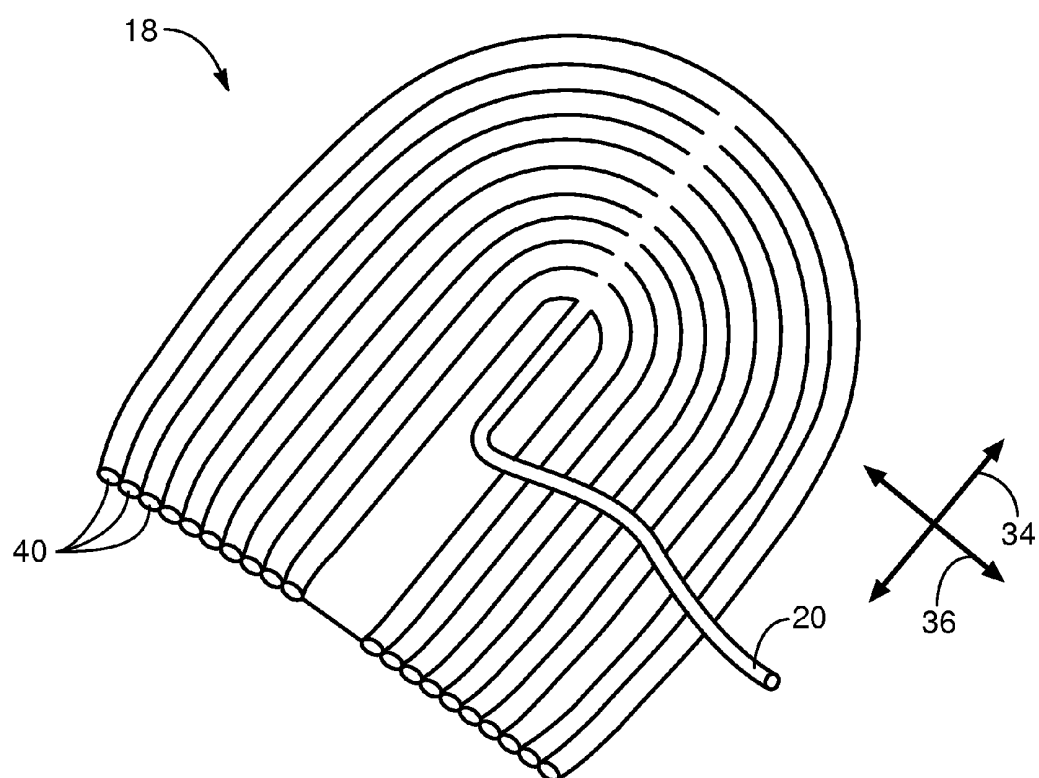


FIG. 9

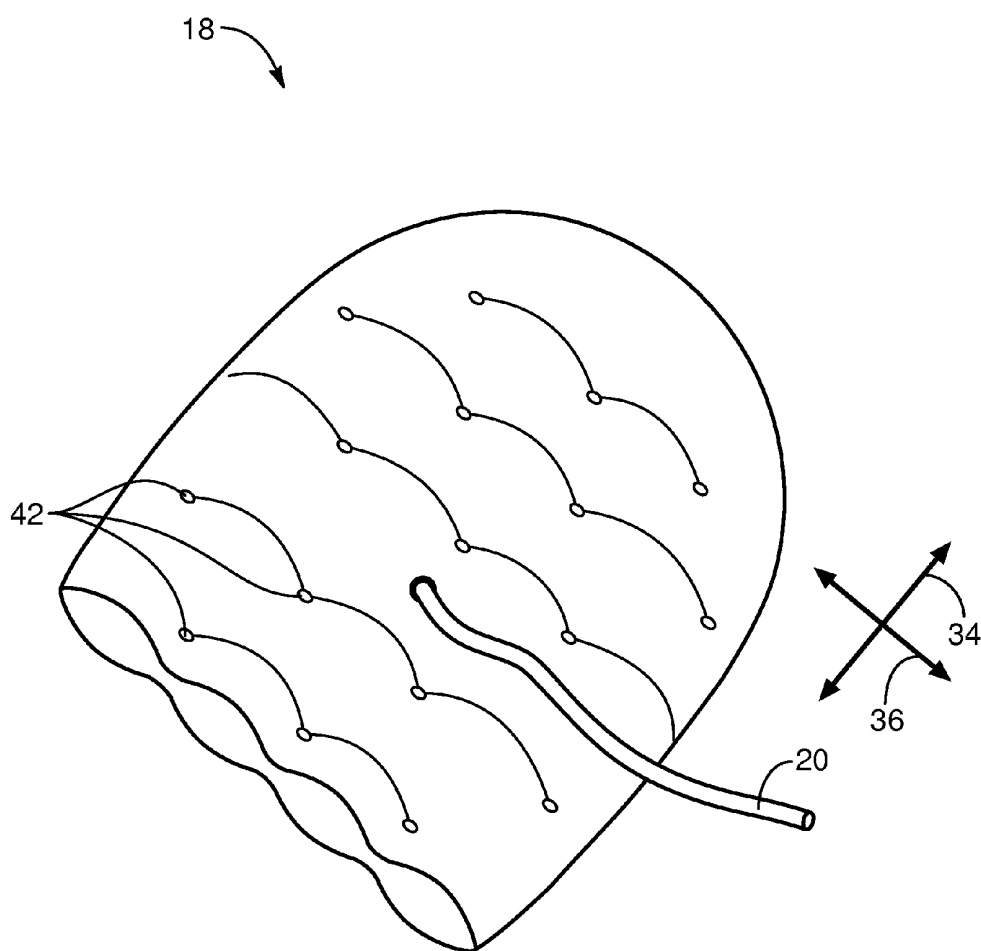


FIG. 10

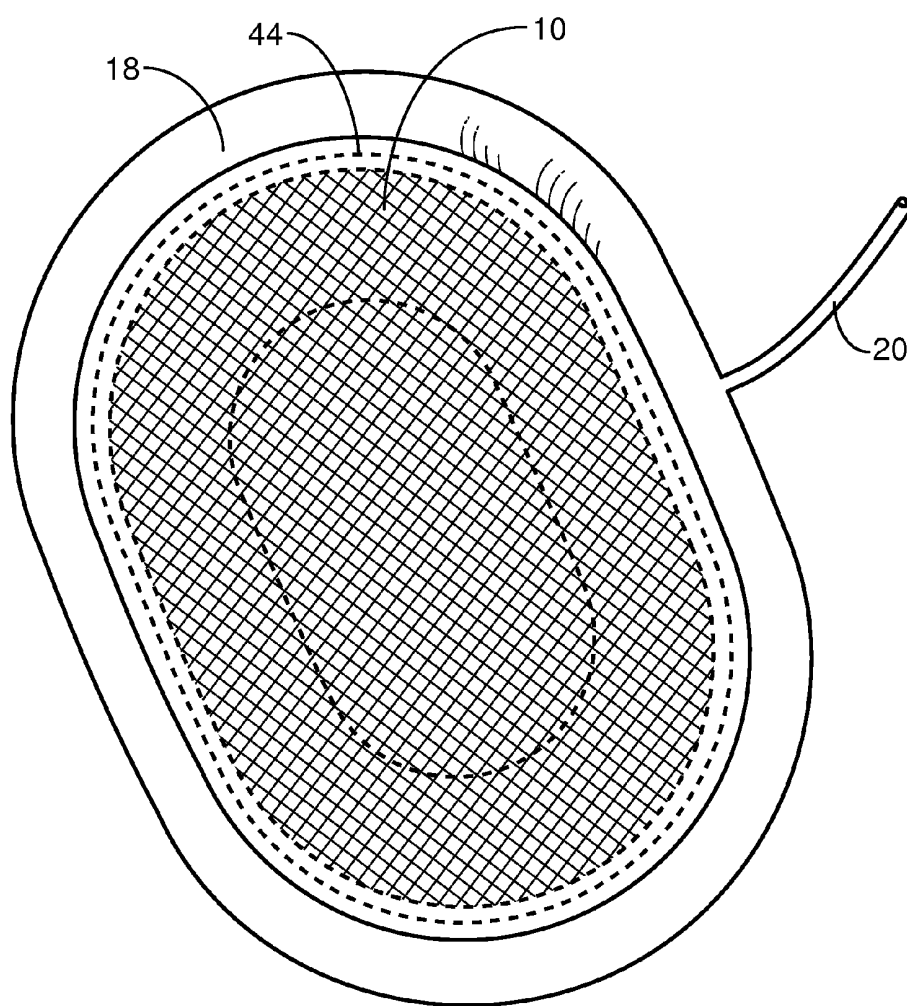


FIG. 11

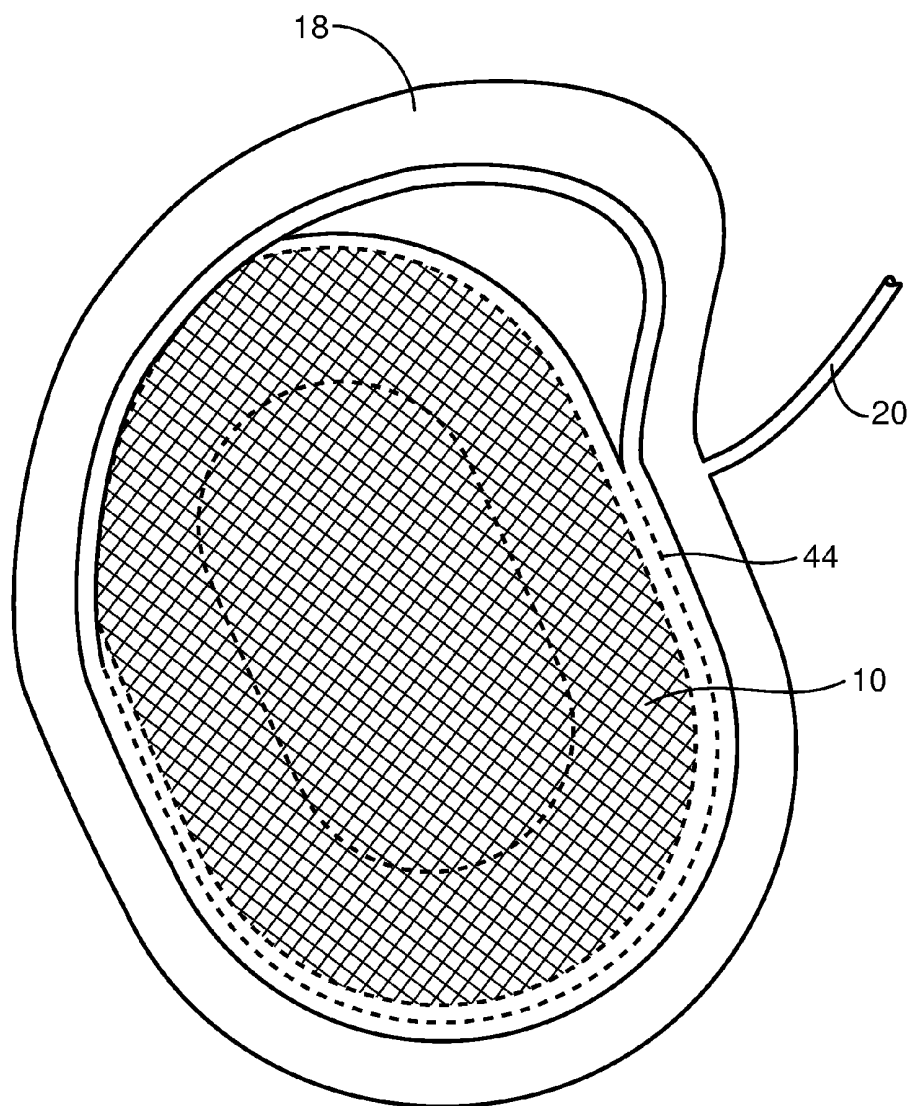


FIG. 12

50

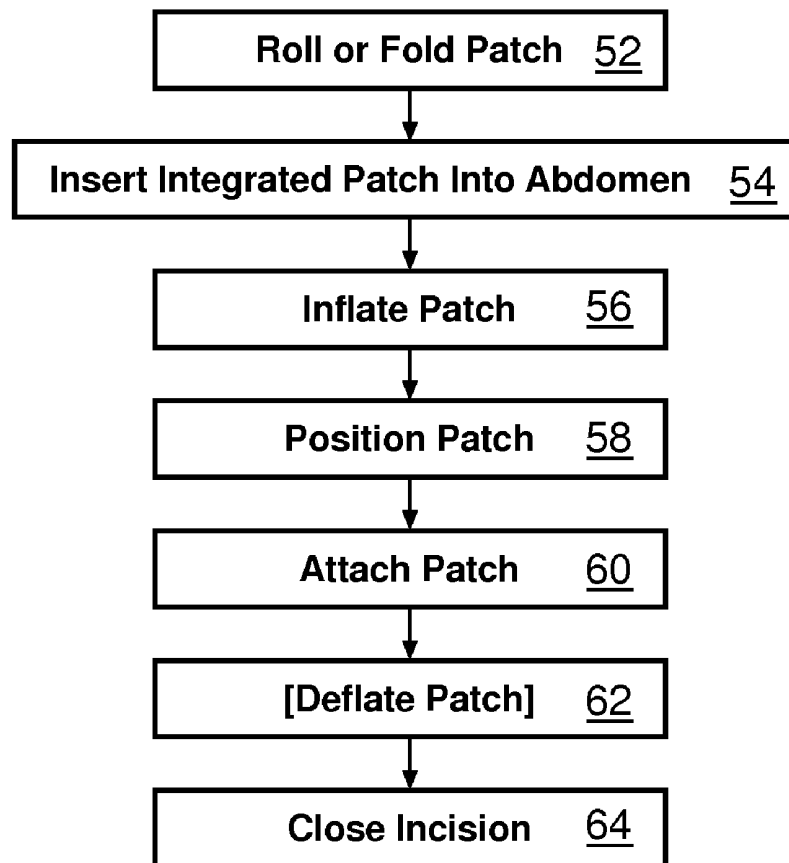



FIG. 13

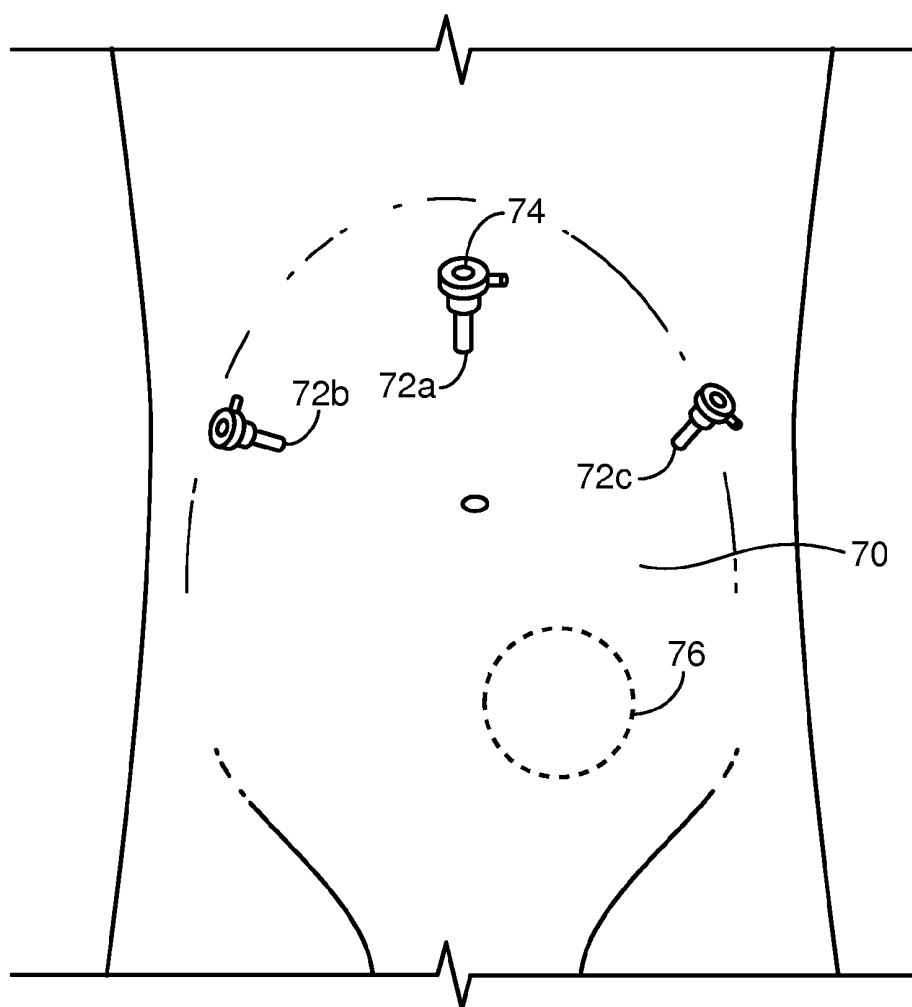


FIG. 14

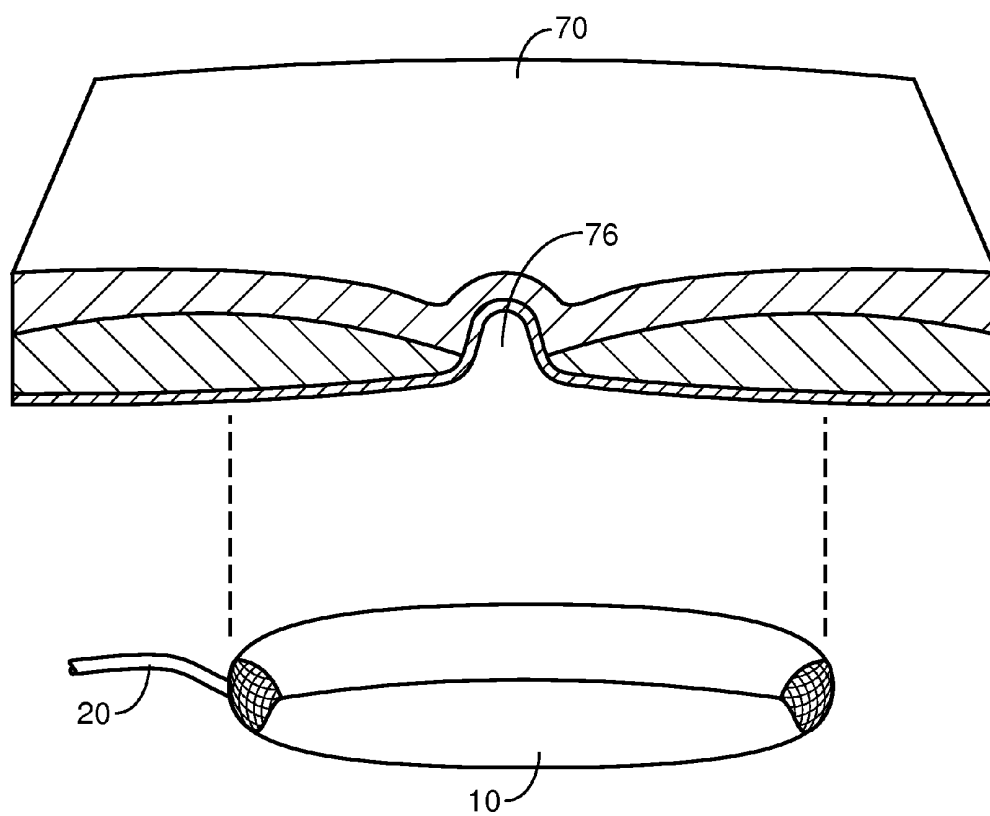


FIG. 15

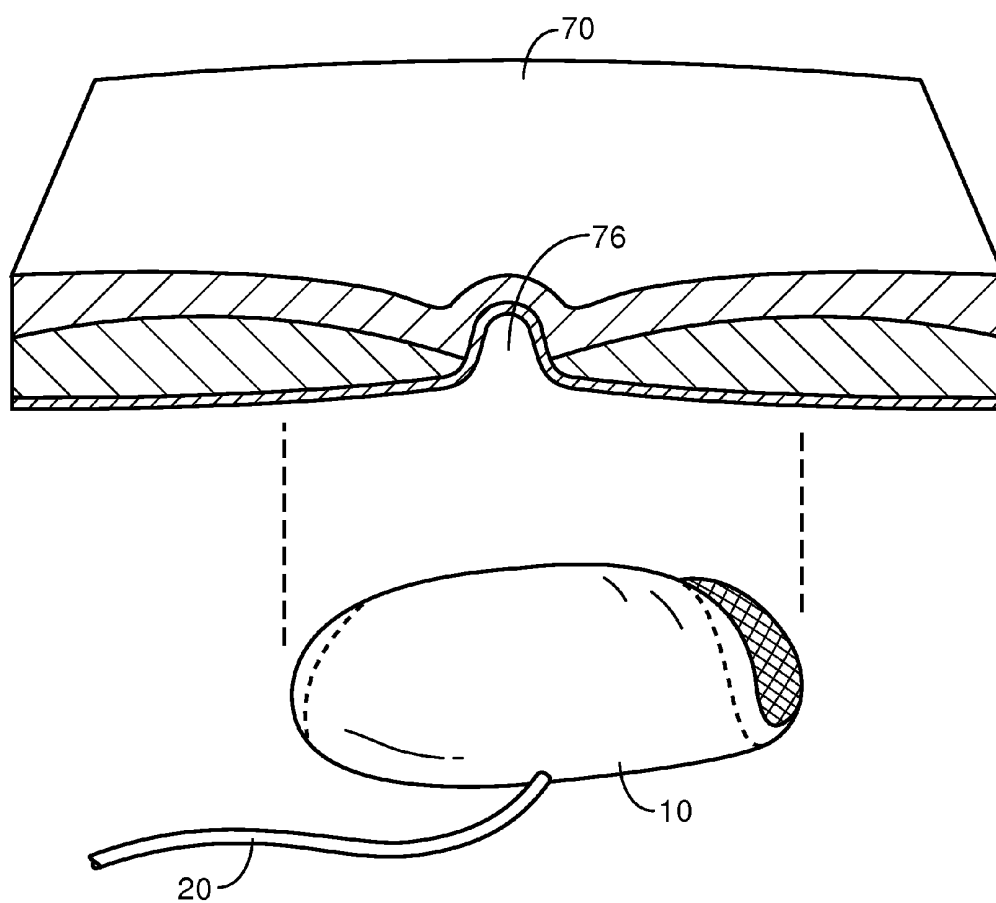


FIG. 16

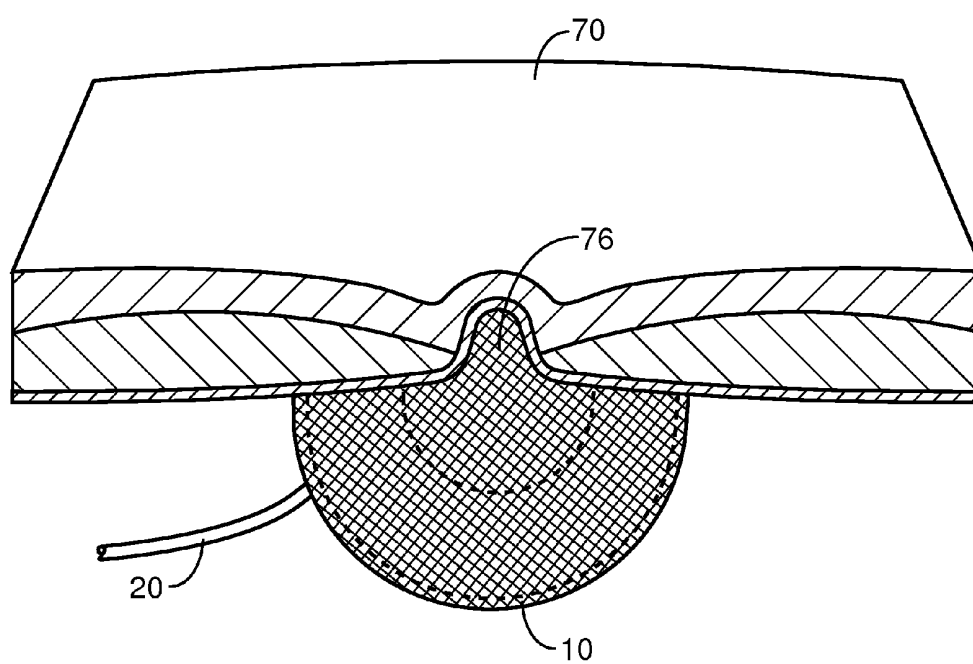


FIG. 17

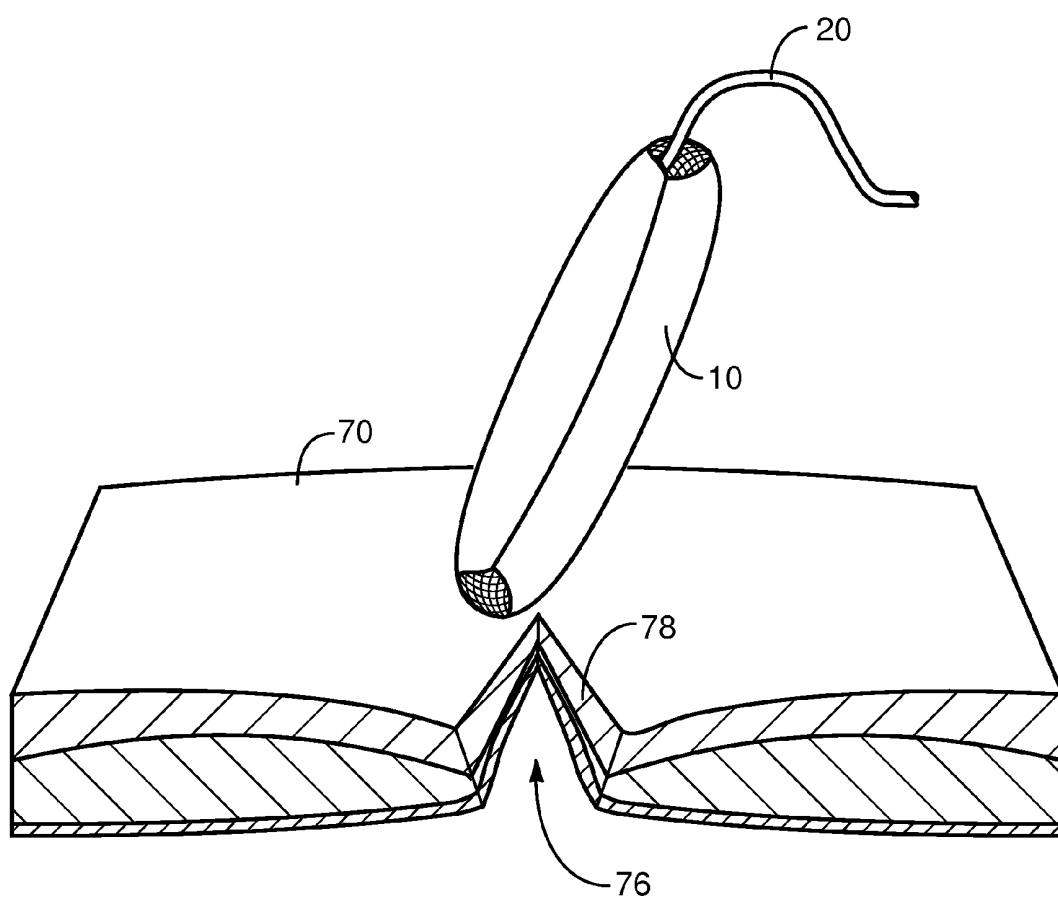


FIG. 18

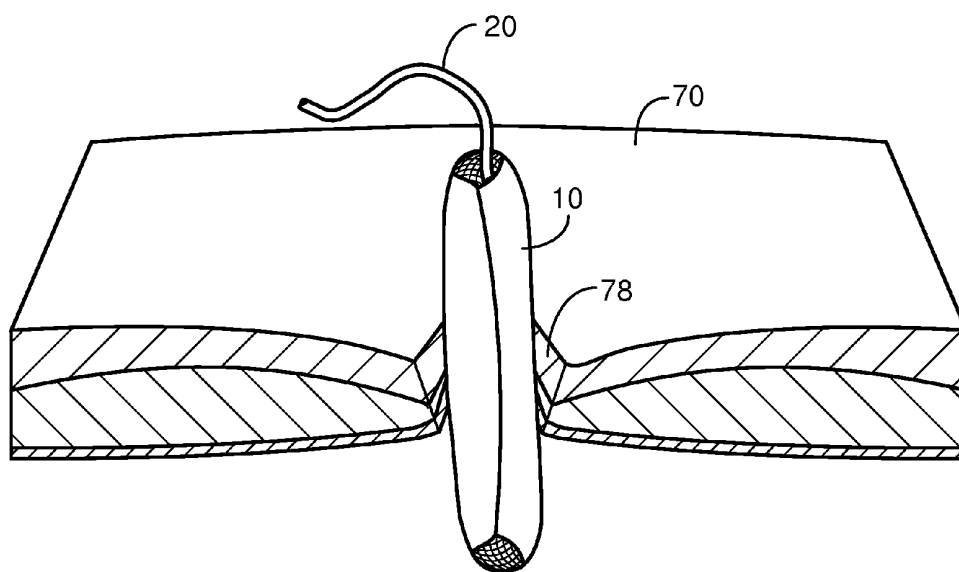


FIG. 19

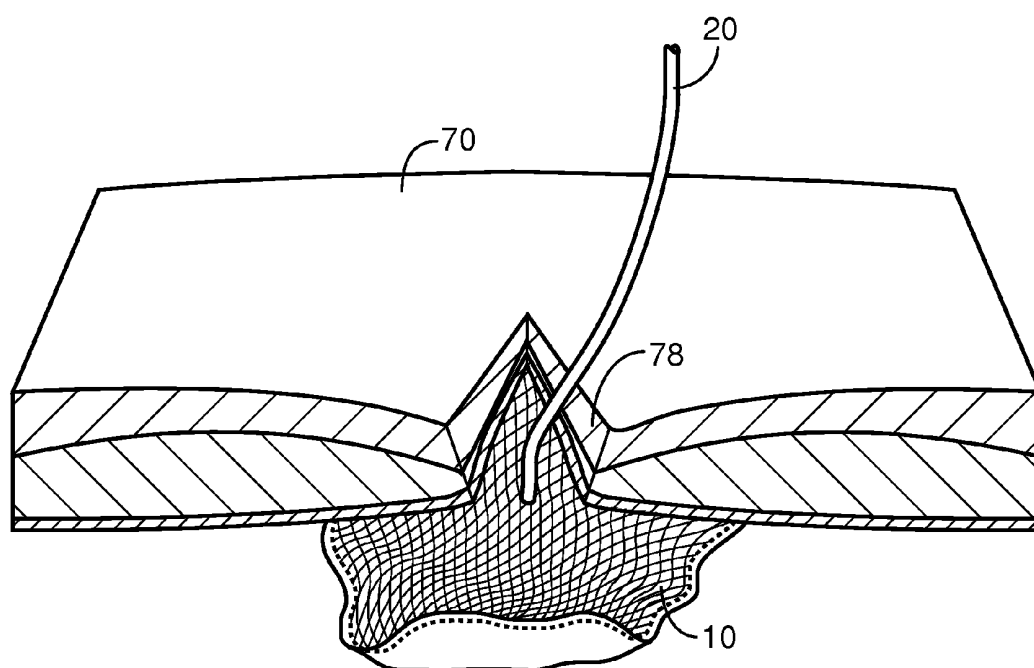


FIG. 20

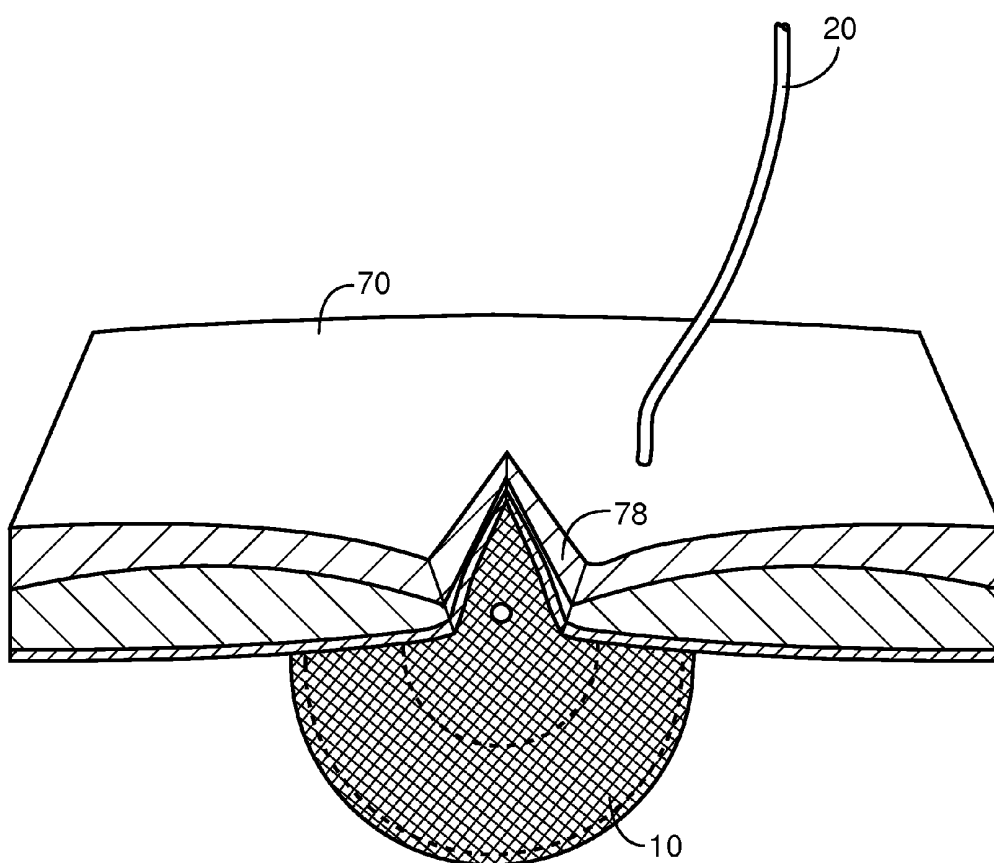


FIG. 21

INFLATABLE HERNIA PATCH

RELATED APPLICATIONS

[0001] This application is a continuation of U.S. patent application Ser. No. 12/478,482, filed Jun. 4, 2009 and U.S. Pat. No. 7,544,213, issued on Jun. 9, 2009, both of which are incorporated herein by reference in its entirety.

BACKGROUND

[0002] 1. The Field of the Invention

[0003] This invention relates to hernia repair and more particularly to apparatus and methods for expanding and maintaining the shape of hernia patches during hernia repair.

[0004] 2. The Background Art

[0005] With more than 20 million hernia repairs occurring worldwide on an annual basis, hernia repair is the most frequently performed surgical operation in the world. Although there are many different techniques for repairing hernias, these techniques generally can be classified as either tension or tension-free repairs.

[0006] For many years, tension repair was the primary procedure used to treat people with hernias. Using this technique, an incision is generally made in the abdomen over the hernia site. Any protruding tissue is pushed back into the correct position within the abdominal cavity and the hernial defect is mended with stitches or sutures. Because the stitches or sutures generally exert tension on the sides of the defect in order to keep it closed, this technique may cause more pain and discomfort than other repair techniques and there is typically a higher probability that the hernia will recur. Consequently, this technique is generally only suitable for very small hernias.

[0007] Tension-free repair techniques are currently the most common techniques and generally utilize a piece of mesh to bridge the hernial defect. These meshes are typically constructed of synthetic materials, such as Goretex®, Teflon®, Dacron®, Marlex®, Prolene®, or the like. Tension-free repairs may be performed using either open surgery or laparoscopic techniques. In open surgery, a surgeon usually makes an incision over the hernial defect and folds and inserts a mesh patch through the incision. This patch may be manually unrolled and positioned inside the abdomen before being fastened with staples, sutures, or the like to the abdominal wall over the defect. Once the mesh is securely attached, tissue grows through the mesh to create a strong but flexible layer that mimics the abdominal wall.

[0008] Tension-free mesh repairs may also be performed laparoscopically. Using this technique, a mesh patch is usually folded and inserted into the abdomen through a small incision away from the hernial defect. The patch is then moved to the region of the hernia, unfolded, positioned over the defect, and attached to the abdominal wall. This surgery is generally referred to as posterior hernia repair because the hernia is repaired from behind the abdominal wall.

[0009] One challenge in performing both open surgery and laparoscopic mesh repairs is unfolding and positioning a mesh patch inside the abdomen once inserted. Because there is typically very little room to work and visibility may be limited inside the abdomen, it is often difficult or awkward to unroll and position a mesh patch prior to attachment. This may result in a patch that is undesirably creased or poorly positioned, creating unwanted tension or discomfort within the abdomen. As a result, some manufacturers of mesh

patches have integrated devices, such as “memory recoil rings” into their patches to allow them to spring open and lie flat once positioned inside the abdomen. These recoil rings are flexible enough to be rolled or folded tightly to allow insertion through an incision in the abdomen.

[0010] Nevertheless, these recoil rings may also be prone to break under the stress of folding, rolling, or placement inside the intra-abdominal space. In fact, several different models of patches from at least one manufacturer have been recalled due to instances of breakage inside the abdomen. These breaks can cause various problems, such as bowel perforations or chronic intestinal fistulae (i.e., abnormal connections or passageways between the intestines and other organs).

[0011] In view of the foregoing, what is needed is a mesh patch that is easily unfolded and positioned within the abdomen, while reducing the safety concerns associated with patches using recoil rings or other expansion mechanisms. Ideally, an improved expansion mechanism should be incorporated into a mesh patch and left inside the abdomen after closing the incision. Furthermore, such a patch would ideally be useful in both open surgery and laparoscopic procedures.

BRIEF SUMMARY OF THE INVENTION

[0012] In view of the foregoing, in accordance with the invention as embodied and broadly described herein, a patch for repairing an intra-abdominal defect is disclosed in one embodiment of the invention as including a mesh layer providing a grid of material perforated by apertures therethrough. This mesh is used to reinforce an area around an intra-abdominal defect. A containment layer may be secured proximate an edge of the mesh layer. A filler may be distributed throughout the apertures of the mesh to prevent a fluid from passing through the mesh. Alternatively a layer or filler may form a wall secured to the mesh. The mesh layer, containment layer, and filler are connected at the respective edges thereof to form a chamber between the containment layer and filler to selectively expand upon receipt of a quantity of fluid between the containment layer and the filler.

[0013] In certain embodiments, a patch in accordance with the invention may include a fill mechanism connected to introduce a fluid into the chamber. Suitable fill mechanisms may include, for example, a chemical to generate a gas, a syringe, a pneumatic bulb, a source of compressed-gas or liquid such as sterile saline, a pump, or the like. In certain embodiments, the fill mechanism may include a conduit connected to introduce a fluid (e.g. liquid or gas) into the chamber. In other embodiments, a fill mechanism, such as a gas-generating chemical, may be located inside the fluid chamber to produce a fluid from inside the patch.

[0014] In selected embodiments, the filler, the containment layer, or both may be formed of a bioabsorbable material that degrades inside the abdomen over time. In selected embodiments, the filler is a bioabsorbable material embedded to seal the apertures of the mesh. The containment layer may, in some embodiments, be formed of the same material as the filler.

[0015] In certain embodiments, the patch may include an anti-adhesion layer substantially impervious to cell growth and non-adherent to live tissue. This layer may help to prevent intestines or other internal organs from adhering to and possibly being damaged by the patch. In selected embodiments, the containment layer is also the anti-adhesion layer. In other embodiments, the filler material may provide the anti-adhe-

sion layer. The anti-adhesion layer may be formed of various types of polymers such as polyfluorinated materials.

[0016] In certain embodiments, to keep the fluid chamber relatively flat, rigid, and to aid in unfolding the patch, the chamber forms one or more inflatable rings. In other embodiments, the chamber may form one or more inflatable ribs. Similarly, the chamber may include one or more regions of securement connecting the containment layer to the mesh layer. These regions of securement may, in certain embodiments, be provided by fasteners such as a welds, adhesives, stitches, staples, or the like.

[0017] In another embodiment in accordance with the invention, a method for repairing an intra-abdominal defect may include providing a patch including a mesh layer integrated with a fluid chamber expandable to extend the mesh layer. The patch may then be folded and inserted through an incision in the abdomen to repair an intra-abdominal defect. The patch may then be unfolded by urging fluid into the fluid chamber, positioned over the intra-abdominal defect, and attached to the abdominal wall to reinforce an area proximate the intra-abdominal defect. The fluid chamber may be left inside the abdomen upon closing the incision.

[0018] In certain embodiments, the method further includes deflating the expandable fluid chamber. This may be accomplished, for example, by puncturing the expandable fluid chamber, allowing fluid to slowly leak through apertures in the expandable chamber, cutting a conduit leading to the expandable fluid chamber, allowing fluid to escape through a conduit leading to the expandable chamber, or the like. In certain embodiments, puncturing may include piercing the fluid chamber with a suture member, such as a needle, staple, forceps, or the like.

[0019] In selected embodiments, urging fluid into the fluid chamber may include urging fluid through a conduit leading to the fluid chamber. In other embodiments, urging fluid into the fluid chamber includes chemically generating fluid inside the fluid chamber.

[0020] In another embodiment in accordance with the invention, a patch for repairing an intra-abdominal defect includes a mesh for attachment to an area proximate an intra-abdominal defect and a fluid chamber integrated into the patch and connected to the mesh. The fluid chamber, upon inflating, extends to maintain the shape of the mesh to facilitate placement and attachment of the mesh proximate the intra-abdominal defect.

BRIEF DESCRIPTION OF THE DRAWINGS

[0021] The foregoing and other objects and features of the present invention will become more fully apparent from the following description and appended claims, taken in conjunction with the accompanying drawings. Understanding that these drawings depict only typical embodiments of the invention and are, therefore, not to be considered limiting of its scope, the invention will be described with additional specificity and detail through use of the accompanying drawings in which:

[0022] FIG. 1 is a perspective view of one embodiment of an improved hernia patch in accordance with the invention;

[0023] FIG. 2 is a cutaway perspective view of the patch illustrated in FIG. 1;

[0024] FIG. 3 is a simplified side profile view of one embodiment of a hernia patch in accordance with the invention;

[0025] FIG. 4 is a simplified side profile view of another embodiment of a hernia patch in accordance with the invention;

[0026] FIG. 5 is a simplified side profile view of another embodiment of a hernia patch in accordance with the invention;

[0027] FIG. 6 is a simplified side profile view of another embodiment of a hernia patch in accordance with the invention;

[0028] FIG. 7 is a cutaway perspective view of one embodiment of a fluid chamber for incorporation into a patch in accordance with the invention;

[0029] FIG. 8 is a cutaway perspective view of another embodiment of a fluid chamber for incorporation into a patch in accordance with the invention;

[0030] FIG. 9 is a cutaway perspective view of another embodiment of a fluid chamber for incorporation into a patch in accordance with the invention;

[0031] FIG. 10 is a cutaway perspective view of another embodiment of a fluid chamber for incorporation into a patch in accordance with the invention;

[0032] FIG. 11 is a perspective view of one embodiment of a patch having an integrated, yet separable (e.g. tear-away) fluid chamber;

[0033] FIG. 12 is another view of the patch illustrated in FIG. 11 showing detachment of the fluid chamber;

[0034] FIG. 13 is a schematic flow chart of one embodiment of a method for repairing a hernia using a patch in accordance with the invention;

[0035] FIG. 14 is a front view of a patient showing one possible arrangement of ports on the abdomen for performing a laparoscopic surgical procedure;

[0036] FIGS. 15 through 17 is a sectioned view of an abdomen showing a patch in accordance with the invention positioned to be used in a laparoscopic procedure; and

[0037] FIGS. 18 through 21 is a sectioned view of an abdomen showing a patch in accordance with the invention positioned to be used in an open surgical procedure.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0038] It will be readily understood that the components of the present invention, as generally described and illustrated in the Figures herein, could be arranged and designed in a wide variety of different configurations. Thus, the following more detailed description of the embodiments of the apparatus and methods of the present invention, as represented in the Figures, is not intended to limit the scope of the invention, as claimed, but is merely representative of selected embodiments of apparatus and methods in accordance with the invention. The invention will be best understood by reference to the drawings, wherein like parts are designated by like numerals throughout.

[0039] Referring to FIGS. 1 and 2, in general, a patch 10 in accordance with the invention for repairing a hernia or other intra-abdominal defect may include a mesh layer 12, a filler 14, and a containment layer 16. As explained in more detail hereafter, the mesh layer 12, containment layer 16, and filler 14 may be connected to form a chamber that expands upon receipt of a quantity of fluid between the containment layer 16 and the filler 14.

[0040] A mesh layer 12 may generally be formed of a grid of material perforated by apertures configured to receive tissue growth therethrough to reinforce an area around an intra-

abdominal defect. The mesh layer **12** may be constructed of any of a wide variety of materials including but not limited to non-fibrous or fibrous, non-porous or porous materials such as Marlex®, Prolene®, Atrium®, Trelex®, Goretex® (ePTFE), Surgical Membrane®, Dualmesh®, Teflon® (PTFE mesh), Mersilene® (braided Dacron® mesh), Surgipro® (braided polypropylene mesh), MaxcroMesh® (perforated PTFE patch), silastic, Vypro®, or the like, to name just a few. The pore size of these meshes may vary greatly and in some cases the pores are sized to allow admission of macrophages, fibroblasts, blood vessels and collagen fibers into the pores. This may reduce the chance of hernia recurrence and provide ingrowth characteristics that mimic normal tissue healing. A mesh **12** may also conform to the abdominal wall musculature anatomy.

[0041] A filler **14** may be used to seal the apertures of the mesh layer **12** to prevent fluid from passing through the apertures. A filler **14** may, in certain embodiments, simply be a layer **14** adjacent to, and optionally attached periodically to, the mesh layer **12** to prevent fluid from passing through the mesh **12**. In other embodiments, the filler **14** may be integrated into the mesh layer. For example, in certain embodiments, the filler may be a bioabsorbable material used to temporarily seal the apertures of the mesh layer **12**. Suitable bioabsorbable materials may include, for example, polylactide polymer, polyglycolic acid, polycaprolactone, gelatin, or the like. After the patch **10** is attached to the abdominal wall, this bioabsorbable material may degrade and be absorbed into the body. This may open and expose the apertures of the mesh **12** to allow body tissue to attach to and intergrow with the mesh layer **12**.

[0042] As mentioned, a containment layer **16** may be attached to the mesh layer **12** (which is sealed by the filler **14**) to form a fluid chamber **18**. The containment layer **16** may, in certain embodiments, be attached to the mesh layer **12** along an edge using stitches **22** (as shown), adhesive, staples, welds, or the like. As shown, other rows or areas of stitches **24**, adhesive, staples, welds, or the like, may be provided at selected locations along the patch to keep the patch **10** relatively flat or planar when inflated.

[0043] The chamber **18** formed by the containment layer **16** and mesh layer **12** may be expanded to extend the patch **10** upon receipt of a fluid. This may allow the patch **10** to unfold and lay flat while inside the abdomen to facilitate placement and attachment to the abdominal wall. In certain embodiments, a fluid such as a biocompatible liquid (e.g., water, saline, etc.) or gas (e.g., carbon dioxide) may be urged into the chamber **18** through a conduit **20**. This fluid may be urged through the conduit **20** using a fill mechanism such as a gas-generating chemical, a syringe, a pneumatic bulb, a source of compressed-gas, a pump, or the like.

[0044] Like the filler **14**, the containment layer **16** may also be formed from a bioabsorbable material. This may allow the containment layer **16** to degrade and absorb into the body after the patch **10** has been inflated and attached inside the abdomen. Thus, in certain embodiments, both the filler **14** and containment layer **16** may be formed of a bioabsorbable material, leaving only the mesh layer **12** inside the abdomen after these two layers **14**, **16** have dissolved.

[0045] In other embodiments, the mesh layer **12** may also be formed of a bioabsorbable material, although it may typically be designed to degrade at a slower rate than the filler **14** or containment layers **16**. This may allow time for tissue to attach and intergrow within the mesh **12** before the mesh **12**

dissolves. In other embodiments, the containment layer **16** may be formed of an anti-adhesion material, such as Goretex® or other polyfluorinated polymers, to minimize tissue adhesions, such as intestinal or other organ adhesions, to the mesh layer **12** and tissues growing therethrough.

[0046] Referring to FIG. 3, in selected embodiments, a patch **10** in accordance with the invention may include a mesh layer **12** and filler **14** integrated into a single layer **12**, **14**. For example, as mentioned hereinbefore, the filler **14** may simply be a material sealing the apertures of the mesh **12** and possibly the pores of the mesh itself if such exist. A containment layer **16** may be attached to the layer **12**, **14**, thereby creating a chamber **18**.

[0047] This chamber **18** may be inflated upon receipt of a fluid to expand and unfold the patch **10**. This fluid may, in certain embodiments, be received through a conduit **20**. This conduit **20** may either attach to the mesh and filler layer **12**, **14**, as shown, to the containment layer **16**, or to both such as when fitted between them. In certain embodiments, the place of attachment of the conduit **20** may differ based on the type of surgery.

[0048] For example, for open surgery, the conduit **20** may be attached to the mesh and filler layer **12**, **14** because the patch **20** is typically inserted through an open incision immediately above the hernial defect. The conduit **20** may be routed through the open incision to a fill mechanism to urge fluid into the patch **10**. In laparoscopic procedures, however, the conduit **20** may be attached to the containment layer **16** because the defect is normally repaired from behind the abdominal wall. Here, the conduit **20** may be routed through a laparoscopic port in the abdomen located some distance away from the hernial defect.

[0049] As previously mentioned, the filler **14**, containment layer **16**, mesh **12**, or combinations thereof, may be formed of a bioabsorbable material. In this way, the chamber **18** may degrade and disappear after the patch **10** is inserted and attached to the abdominal wall. In other embodiments, the containment layer **16** may be formed of an anti-adhesion material, such as Goretex® or some other inert polymer.

[0050] Referring to FIG. 4, in another embodiment, a patch **10** in accordance with the invention may be integrated to include a mesh layer **12** and filler layer **14** as two separate layers only connected periodically such as at points therealong, an edge, or the like. A containment layer **16** may be attached to the filler layer **14** to form a chamber **18**. A conduit **20** may supply fluid to the chamber **18**. Although embodied as a separate layer, the filler layer **14** may nevertheless prevent fluid from flowing out of the chamber **18** through apertures of the mesh layer **12**.

[0051] The mesh layer **12** may be attached to the filler layer **14** using stitches, adhesives, staples, welds, or other means of attachment. Furthermore, like the previous example, either the filler layer **14**, containment layer **16**, or both may be made of a bioabsorbable material. In other embodiments, either the filler layer **14** or containment layer **16** may be formed of an anti-adhesion material, the other layer typically being bioabsorbable. For example, in one embodiment, the containment layer **16** may be formed of an anti-adhesion material. In another embodiment, the filler layer **14** may be formed of an anti-adhesion material, such as Goretex®, and the containment layer **16** may be formed of a bioabsorbable material. When the containment layer **16** degrades and disappears, the filler layer **14** may be exposed to prevent intestines, internal organs, or other tissue from adhering to the mesh layer **12**.

[0052] Referring to FIG. 5, in yet another embodiment, a patch 10 in accordance with the invention may include a containment layer 16 and an anti-adhesion layer 22 as separate layers. For example, the patch 10 may include a mesh layer 12 and a filler layer 14 to prevent fluid from passing through the mesh layer 12. The containment layer 16 may be attached to the filler layer 14 or mesh layer 12 to form a chamber 18. A separate anti-adhesion layer 22 may be attached beneath (e.g. inward from) the containment layer 16 to prevent improper adhesions of tissues to the patch 10. In certain embodiments, the filler layer 14 and containment layer 16 may be bioabsorbable such that the chamber 18 degrades and disappears, leaving only the mesh layer 12 and anti-adhesion layer 22 inside the abdomen.

[0053] Referring to FIG. 6, in other embodiments, a patch 10 may include a fill mechanism inside the chamber 18. For example, in one contemplated embodiment, a chemical combination may be stored within a container 24 in the chamber 18. This container 24 may be ruptured to expose to one another the chemicals inside the chamber 18. For example, acetic acid and sodium bicarbonate make carbon dioxide and neither the component nor gas is toxic, all of them being bioabsorbable. This or another mechanism may initiate a gas-generating chemical reaction inside the chamber 18 to inflate and extend the patch 10. The generated gas may be biocompatible and may be released from the chamber 18 by puncturing the chamber 18, such as during attachment of the patch 10 to the abdomen.

[0054] Referring to FIG. 7, in selected embodiments, a chamber 18, as described in association with FIGS. 1 through 6, may be designed to urge the patch 20 toward a substantially planar configuration during inflation. That is, a chamber 18 may tend to expand in all directions when inflated. Thus, a chamber 18 may be designed to stay relatively flat, or planar, even when expanded. For example, in one embodiment, the chamber 18 may include an inflatable ring 26 near, just inside, or around the outer edge of the patch 10. This ring 26 may inflate through a conduit 20 or other filling means. When inflated, this ring 26 may expand to extend the patch 10 in a planar orientation to facilitate placement and attachment of the patch 10 to the abdominal wall.

[0055] In certain embodiments, a sheet-like portion 28 may span the space inside the ring 26. In selected embodiments, this portion 28 may be useful to attach a patch 10 to the abdominal wall without puncturing the chamber 26. For example, stitches, sutures, staples, or the like, may pierce the inner mesh portion 28 without puncturing the outer chamber 26. This may allow the ring-shaped chamber 26 to maintain the shape of the patch 10 until the patch 10 is adequately positioned and attached to the abdominal wall. Once attached, the chamber 26 may be deflated by puncturing the chamber 26, cutting the conduit 20, tearing off the conduit 20, or by piercing the chamber 26 with a staple, suture, or the like.

[0056] Referring to FIG. 8, in other embodiments, a chamber 18 may include one or more inflatable ribs 30 for extending and providing rigidity to the patch 10 primarily in a first direction 34. These ribs 30 may be created by providing one or more linear securement regions 38 along the length 34 of the chamber 18. In selected embodiments, the ribs 30 may be connected by passageways 32. These passageways 32 may provide rigidity primarily in a second direction 36, which may be perpendicular to the first direction 34. Like the previous example, the rib structure may serve to keep the cham-

ber 18 substantially flat and comparatively stiff while a patch 10 is placed and attached to the abdominal wall.

[0057] Referring to FIG. 9, in yet another embodiment, a chamber 18 may include a plurality of concentric inflatable rings 40. Like the example of FIG. 7, these rings 40 may expand when inflated to extend a patch 10 and facilitate placement and attachment of the patch 10 to the abdominal wall. However, by using multiple rings 40, the rings 40 may be smaller, thereby providing a patch 10 that is thinner and more compact when inflated. Furthermore, the multiple rings 40 may provide rigidity to the patch 10 in multiple directions 34, 36 during placement and attachment of the patch 10 to the abdominal wall.

[0058] Referring to FIG. 10, in another embodiment, the chamber 18 may include one or more small regions 42 of securement, or "kiss-throughs," to keep the chamber 18 relatively thin and flat when inflated. One benefit of this embodiment is that the small regions 42 of securement may provide greater stiffness to the patch 10 in multiple directions 34, 36.

[0059] Referring to FIGS. 11 and 12, in selected embodiments, a chamber 18 may be detachable from a patch 10 in accordance with the invention after the patch 10 is secured to the abdominal wall. For example, in selected embodiments, a patch 10 may include a chamber 18 detachable from the patch 10 by way of a scored or perforated line 44. To extend the patch 10, the chamber 18 may be inflated through a conduit 20. The patch 10 may then be positioned and attached to the abdominal wall with staples, sutures, stitches, or the like. Once attached, the chamber 18 may be detached from the patch 10 by tearing it along the score line 44. The chamber 18 may then be removed from the abdomen through an incision, such as through a laparoscopic port. This embodiment may be most suitable for laparoscopic procedures.

[0060] Referring to FIG. 13, one embodiment of a method 50 for repairing an intra-abdominal defect may include first, providing a patch 10 comprising a mesh layer 12 integrated with a fluid chamber 18 expandable to extend the mesh 12. The method may then include rolling 52, folding 52, or otherwise compacting 52 the patch 10 and inserting 54 the patch 10 into the abdomen. For the purposes of this description, the terms "compacting," "folding," and "rolling" may be used interchangeably.

[0061] In open surgery, this may include, for example, rolling 52 or folding 52 the patch 10 around a finger and inserting the patch 10 into the incision with the finger (e.g., for smaller patches), or simply rolling 52 the patch, such as into thirds, and inserting 54 the patch 10 through the open incision (e.g., for larger patches). For laparoscopic procedures, this may include folding 52 or rolling 52 the patch 10 around a surgical tool, such as a sponge holder or forceps, to insert 54 the patch 10 through a port in the abdomen.

[0062] Once inside the abdomen, the patch 10 may then be inflated 56 to unfold and extend the patch 10 to give it a substantially flat orientation. This step may include urging a fluid, such as water, saline, air, carbon dioxide, nitrogen, or the like, into the patch chamber 18. As previously mentioned, this may be accomplished using a fill mechanism such as a syringe, pneumatic bulb, source of compressed-gas, pump, or the like, to urge fluid through a conduit 20 leading to the chamber 18. In other embodiments, this step 56 may be accomplished from inside the patch 10, such as by internally generating a fluid through a chemical reaction.

[0063] Once inflated, the patch 10 may be positioned over the hernial or other intra-abdominal defect. In certain

embodiments, such as in open surgery procedures, the conduit **20** may be used to center the patch over the hernial defect. That is, because the open incision is generally made over the hernial defect, the conduit **20** (assuming it attaches to a central region of the patch **10**) may be used to center the patch **10** over the defect simply by centering the conduit **20** through the incision. In other embodiments, the patch **10** may also be urged against the abdominal wall by gently pulling on the conduit **20** prior to attachment. This may also help the patch **10** to conform to the abdominal wall which may be rounded or curved.

[0064] Next, the patch **10** may be attached **60** to the abdominal wall. As previously mentioned, the patch **10** may be attached to the abdominal wall using staples, sutures, or other means of attachment. Once properly attached, the chamber **18** may optionally be deflated **62**. This deflation step **62** may include puncturing the fluid chamber **18** (e.g., using a needle, forceps, staple, etc.), cutting the conduit **20** leading to the fluid chamber **18**, simply allowing fluid to escape back through the conduit **20** leading to the chamber **18**, or actually drawing fluid out of the chamber **18** through the conduit **20**.

[0065] In certain embodiments, the fluid chamber **18** may be designed to allow fluid to slowly leak through perforations in the chamber **18** after expansion (e.g. filling, inflation). In embodiments where all or part of the chamber **18** is bioabsorbable, the chamber **18** may also deflate once a portion of the chamber **18** has degraded. In certain embodiments, the attachment step **60** may be sufficient to deflate the chamber **18**. That is, staples, sutures, or the like used to attach the patch **10** may also puncture and deflate the chamber **18** in a single step.

[0066] After the patch **10** has been properly attached and deflated, drained, or otherwise collapsed, cleanup procedures such as cutting or tearing off the conduit **20** may be performed. The incision or incisions (either open or laparoscopic) may then be closed **64**. Because the chamber **18** is integrated into the patch **10**, the walls of the chamber **18** may be left inside the abdomen.

[0067] Referring to FIG. **14**, in general, a laparoscopic surgical procedure may involve making one or more small incisions (e.g., 5-15 mm) in the abdomen **70**, thereby creating ports **72a-c** through which a laparoscope, tools, or other instruments may be inserted. In certain embodiments, a cannula **74** may be used to hold the ports **72a-c** open and to assist in inserting and removing objects or substances from the abdomen **70**. A cannula **74** may come with a trocar (not shown) to pierce the abdomen **70** and thereby obtain access to a desired abdominal space.

[0068] For example, when treating a hernia **76**, a camera port **72a** may be positioned below the sternum to allow a clear view down the center of the abdomen **70**. This also allows side ports **72b**, **72c** to be placed on either side of the abdomen **70** without blocking the view of the camera. One or both of the side ports **72b**, **72c** may be spaced laterally as far as necessary or possible to allow a surgeon to pass tools through the ports **72b**, **72c** to the abdominal wall to provide clear access to all parts of the patch **10**. Additional ports may be added to access larger hernial defects as needed. The ability to inflate or otherwise swell and expand the patch **10** disclosed herein allows the patch **10** to be unfolded and positioned against the abdominal wall without the need for multiple instruments or sutures.

[0069] Referring to FIG. **15**, while continuing to refer generally to FIG. **14**, in a laparoscopic procedure, a patch **10** may

be rolled or folded and inserted through a port **72** in the abdomen **70**. This may be accomplished, for example, by rolling the patch **10** around a sponge holder, forceps, or the like, and inserting the patch **10** through a port **72**. If a conduit **20** is used to inflate or otherwise swell the chamber **18** to expand (e.g. lay out or extend) the patch **10**, this conduit **20** may be routed through the port **72** to a fill mechanism such as a syringe, pneumatic bulb, a source of liquid or compressed gas, a pump, or the like outside of the abdomen. The patch **10** may then be positioned proximate the hernial defect **76**.

[0070] Referring to FIG. **16**, once the patch **10** is positioned proximate the hernial defect **76**, a fluid may be urged into the patch **10** through the conduit **20** to unfold, lay flat, and provide comparative stiffness to the patch **10**.

[0071] Referring to FIG. **17**, once the patch **10** is inflated such that it lays substantially flat, the patch **10** may be positioned against the abdominal wall to cover the hernial defect **76**. Ideally, the center of the patch **10** is positioned to be centered directly over the hernial defect **76** to allow adequate overlap beyond the outer edges of the defect **76**. In selected embodiments, a suture may be passed through a small incision in the abdomen immediately above the hernial defect. This suture may be passed through the center of the mesh layer **12** of the patch **10**. The suture may then be used to snug the patch **10** up against the abdominal wall and center the patch **10** over the defect **76**.

[0072] Once centered, the patch **10** may be attached to the abdominal wall with sutures, staples, or the like. This step may also puncture the fluid chamber **18**, thereby allowing the patch **10** to deflate (e.g. drain or otherwise evacuate of gas or liquid). Alternatively, the patch **10** may be manually deflated by cutting the conduit **20**, allowing fluid to escape through the conduit **20**, allowing fluid to slowly leak through the chamber **18**, or the like. After the chamber **18** is collapsed (e.g. emptied, deflated) and the conduit **20** removed, the incisions to the abdomen may be closed.

[0073] Referring to FIG. **18**, in an open surgery procedure, an incision **78** is typically made immediately over the hernial defect **76**. The hernial sac may then be identified and opened, and the hernial sac's contents may be pushed back into the abdominal cavity. The surgeon may then clear out an intra-abdominal space (nominally a plane) around the defect perimeter in order to create an area and region for the patch **10** to rest against the abdominal wall.

[0074] Referring to FIG. **19**, once this region including a contact area for the patch is cleared, the patch **10** may be rolled or folded and inserted through the incision **78**. As previously mentioned, this may include rolling or folding the patch **10** around a finger and then inserting the patch into the incision **78** with the finger. Alternatively, this may include simply compacting, such as by folding or rolling the patch **10**, such as folding it into thirds, and inserting it through the open incision **78**. Where used, a conduit **20** leading to the patch **10** may be routed through the incision **78**.

[0075] Referring to FIG. **20**, once inserted and positioned about the hernial defect **76**, a fluid may be urged into the patch **10** through the conduit **20** to unfold the patch **10** and provide rigidity (e.g. comparative stiffness) to the patch **10**. As previously mentioned, the patch **10** may also be urged against the abdominal wall by gently pulling on the conduit **20** prior to attachment. This may also help the patch **10** to bend or flex to conform to the abdominal wall.

[0076] Referring to FIG. **21**, once the patch **10** is inflated or otherwise filled to extend itself to an area where it can lie

substantially flat, the patch **10** may be positioned against the abdominal wall about the hernial defect **76**. As with previous examples, the center of the patch **10** is ideally positioned directly over the hernial defect **76** to provide adequate overlap beyond the outer edges of the defect **76**. This may be accomplished by centering the conduit **20** through the incision. Once centered, the patch **10** may be attached to the abdominal wall with sutures, staples, or the like, which penetrators may also puncture the fluid chamber **18** to collapse the chamber **18** of the patch **10**. Alternatively, the patch is deflated by cutting the conduit **20**, allowing fluid to escape through the conduit **20**, allowing fluid to slowly leak through the chamber **18**, or the like. After the chamber **18** is collapsed and the conduit **20** removed, the incision **78** may be closed.

[0077] The present invention may be embodied in other specific forms without departing from its basic functions or essential characteristics. The described embodiments are to be considered in all respects only as illustrative, and not restrictive. The scope of the invention is, therefore, indicated by the appended claims, rather than by the foregoing description. All changes which come within the meaning and range of equivalency of the claims are to be embraced within their scope.

What is claimed is:

1-20. (canceled)

21. An apparatus for repairing an intra-abdominal defect, the apparatus comprising

a mesh layer;

a fluid chamber connected to the mesh layer;

the fluid chamber being inflatable to extend the mesh layer;

and

the fluid chamber comprising at least one of an inflatable ring and an inflatable rib.

22. The apparatus of claim **21**, wherein the fluid chamber further comprises a port enabling an inflating fluid comprising at least one of a liquid and a gas to be inserted into the fluid chamber.

23. The apparatus of claim **21**, wherein the fluid chamber is selectively detachable from the mesh layer.

24. The apparatus of claim **21**, wherein the mesh layer comprises a perimeter.

25. The apparatus of claim **24**, wherein the fluid chamber comprises an inflatable ring forming a perimeter thereof, the inflatable ring extending proximate the perimeter of the mesh layer.

26. The apparatus of claim **21**, wherein the mesh layer is bioabsorbable.

27. A method for repairing an intra-abdominal defect, the method comprising:

providing a patch comprising

a mesh layer;

a fluid chamber connected to the mesh layer;

the fluid chamber being inflatable to extend the mesh layer;

and

the fluid chamber comprising at least one of an inflatable ring and an inflatable rib;

positioning the patch inside a patient proximate an intra-abdominal defect;

extending the mesh layer by inflating the fluid chamber; and securing the mesh layer to the patient.

28. The method of claim **27**, wherein the securing comprises suturing the mesh layer over the intra-abdominal defect.

29. The method of claim **27**, wherein positioning comprises:

rolling the patch to obtain a rolled configuration thereof; and

laparoscopically inserting the patch in the rolled configuration within the patient.

30. The method of claim **27**, further comprising deflating the fluid chamber.

31. The method of claim **27**, further comprising separating the fluid chamber from the mesh layer.

32. The method of claim **31**, further comprising removing the fluid chamber from within the patient.

33. The method of claim **27**, wherein the extending comprises pumping a fluid into the fluid chamber.

34. The method of claim **27**, wherein the extending comprises inserting at least one of a gas and liquid into the fluid chamber.

35. A method for repairing an intra-abdominal defect, the method comprising:

providing a patch comprising a mesh layer and a fluid chamber connected to the mesh layer, the fluid chamber expandable to extend the mesh layer, the fluid chamber forming at least one of an inflatable ring and an inflatable rib;

compacting the patch;

inserting the patch in a compacted form into an abdomen;

extending the patch by urging fluid into the fluid chamber;

positioning the patch over the intra-abdominal defect; and attaching the patch to a wall of the abdominal to reinforce an area proximate an intra-abdominal defect.

36. The method of claim **35**, wherein the attaching comprises suturing the mesh layer over the intra-abdominal defect.

37. The method of claim **35**, wherein:

the compacting comprises rolling the patch to obtain a rolled configuration thereof; and

the inserting comprises laparoscopically inserting the patch in the rolled configuration within the abdomen.

38. The method of claim **35**, further comprising separating the fluid chamber from the mesh layer.

39. The method of claim **38**, further comprising removing the fluid chamber from within the abdomen.

40. The method of claim **35**, wherein the extending comprises pumping a liquid into the fluid chamber.

* * * * *

专利名称(译)	充气疝补丁		
公开(公告)号	US20120029540A1	公开(公告)日	2012-02-02
申请号	US13/207281	申请日	2011-08-10
[标]申请(专利权)人(译)	ADAMS JASON P		
申请(专利权)人(译)	ADAMS JASON P.		
当前申请(专利权)人(译)	ADAMS JASON P.		
[标]发明人	ADAMS JASON P		
发明人	ADAMS, JASON P.		
IPC分类号	A61B17/03		
CPC分类号	A61F2/0063 A61F2002/0068 A61F2250/003 A61F2250/0003 A61F2210/0004 A61F2/0077 A61F2002/009		
优先权	11/519652 2006-09-12 US		
其他公开文献	US8317872		
外部链接	Espacenet USPTO		

摘要(译)

在本发明的一个实施例中公开了一种用于修复腹内缺损的贴片，其包括网孔层，该网孔提供穿过网孔的孔穿孔的材料网格。该网状物用于加强腹腔内缺损周围的区域。容纳层固定在网格层的边缘附近。填料分布在筛网的孔上，以容纳穿过筛网的流体。网状层，容纳层和填充物连接以形成腔室，以在容纳层和填充物之间接收一定量的流体时选择性地膨胀。

