



US 20170042542A1

(19) **United States**

(12) **Patent Application Publication**  
**Forsell**

(10) **Pub. No.: US 2017/0042542 A1**  
(43) **Pub. Date: Feb. 16, 2017**

(54) **IMPLANTABLE TISSUE CONNECTOR**

(71) Applicant: **Peter Forsell**, Bouveret (CH)

(72) Inventor: **Peter Forsell**, Bouveret (CH)

(21) Appl. No.: **15/336,958**

(22) Filed: **Oct. 28, 2016**

*A61B 17/34* (2006.01)

*A61M 13/00* (2006.01)

*A61B 17/32* (2006.01)

*A61M 1/10* (2006.01)

*A61B 1/313* (2006.01)

*A61B 17/3478* (2013.01); *A61M 13/003* (2013.01); *A61B 17/320016* (2013.01); *A61M 27/002* (2013.01); *A61B 2017/1132* (2013.01)

(52) **U.S. Cl.**

CPC ..... *A61B 17/11* (2013.01); *A61M 1/1008*

(2014.02); *A61M 5/142* (2013.01); *A61B 1/3132* (2013.01); *A61B 17/3478* (2013.01);

*A61M 13/003* (2013.01); *A61B 17/320016* (2013.01); *A61M 27/002* (2013.01); *A61B 2017/1132* (2013.01)

**Related U.S. Application Data**

(63) Continuation of application No. 12/682,533, filed on Apr. 9, 2010, now Pat. No. 9,480,551, filed as application No. PCT/EP2008/008590 on Oct. 10, 2008.

(60) Provisional application No. 60/960,716, filed on Oct. 11, 2007, provisional application No. 60/960,766, filed on Oct. 12, 2007, provisional application No. 60/960,764, filed on Oct. 12, 2007, provisional application No. 60/960,765, filed on Oct. 12, 2007, provisional application No. 60/960,767, filed on Oct. 12, 2007, provisional application No. 60/960,790, filed on Oct. 15, 2007, provisional application No. 60/960,715, filed on Oct. 11, 2007.


**Publication Classification**

(51) **Int. Cl.**

*A61B 17/11* (2006.01)  
*A61M 5/142* (2006.01)  
*A61M 27/00* (2006.01)

**ABSTRACT**

An implantable tissue connector comprises a conduit and at least one bulge extending outwardly from the conduit's outer surface in a circumferential direction. At least one blocking ring loosely fitting over the outer surface with a clearance between the outer surface and the blocking ring is provided for mounting tubular living tissue within the clearance. The blocking ring has an inner diameter which is sized relative to an outer diameter of the bulge to prevent the blocking ring from slipping over the bulge when living tissue is mounted within the clearance. During implantation, the conduit is inserted into the tubular part of living tissue and over the bulge. Then, the blocking ring is pushed over the free end of the living tissue against the bulge. The living tissue is secured to the conduit with a self-enhancing effect when the tissue tends to be pulled off of the conduit

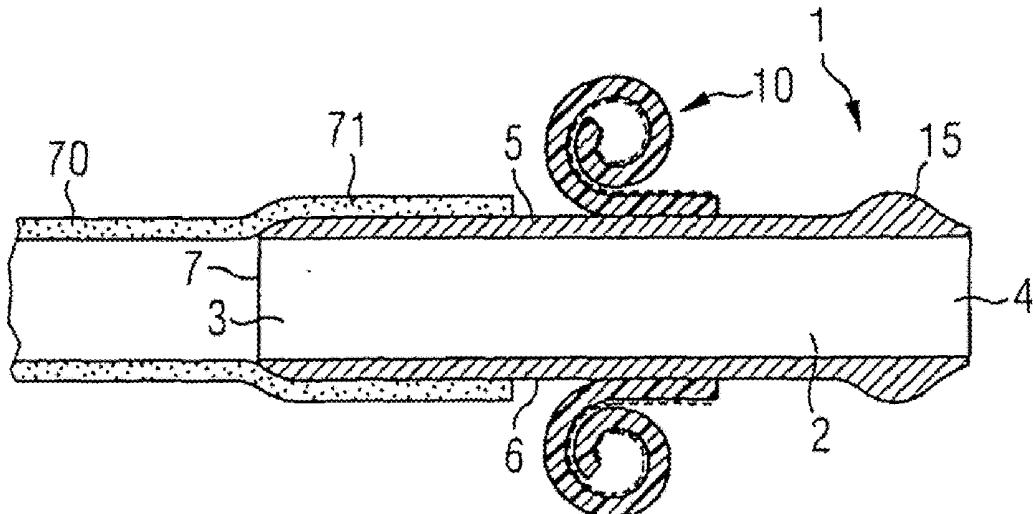

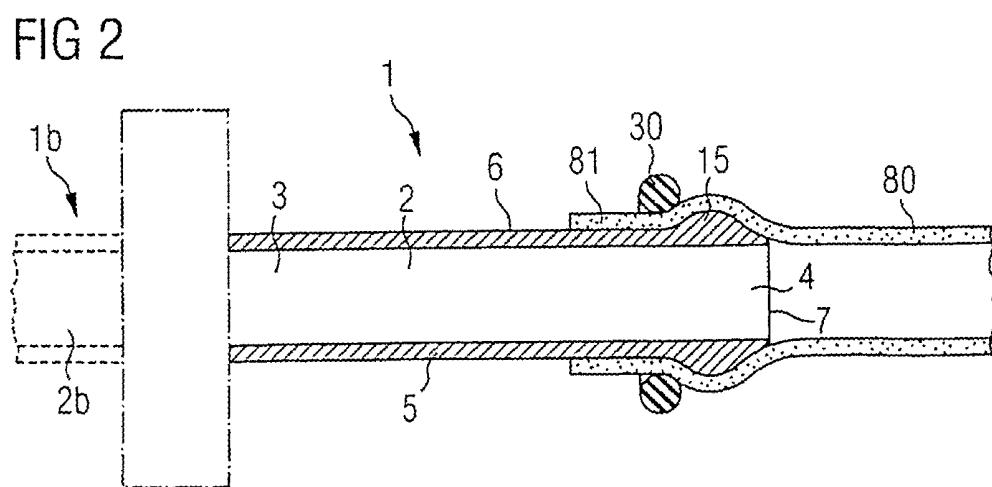
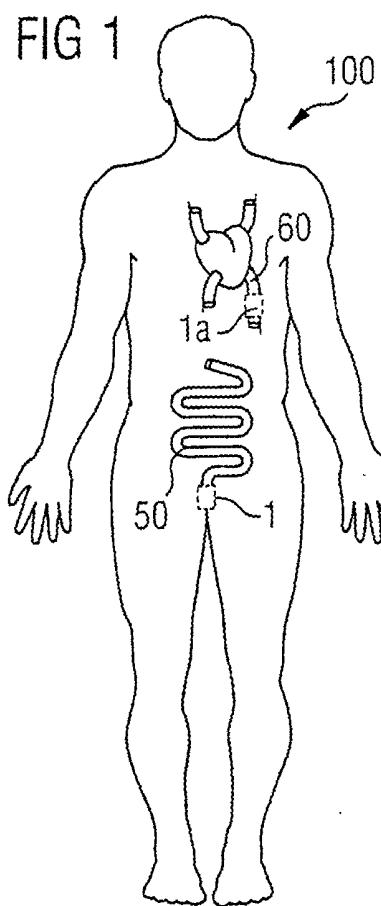


FIG 3

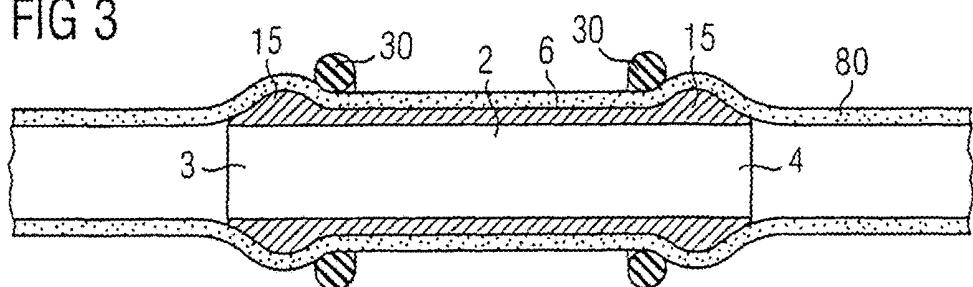


FIG 4

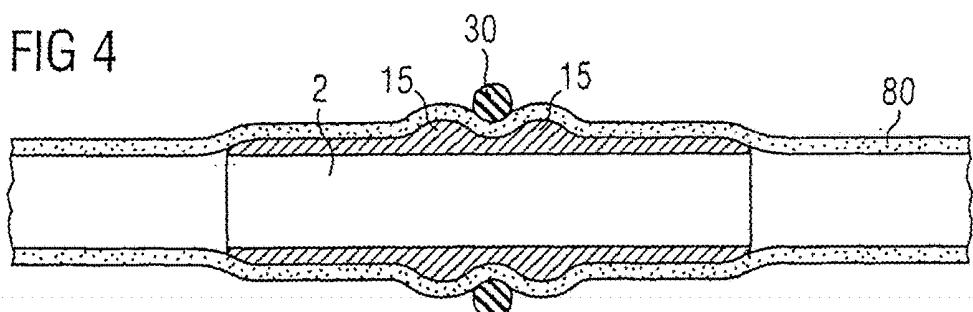


FIG 5A

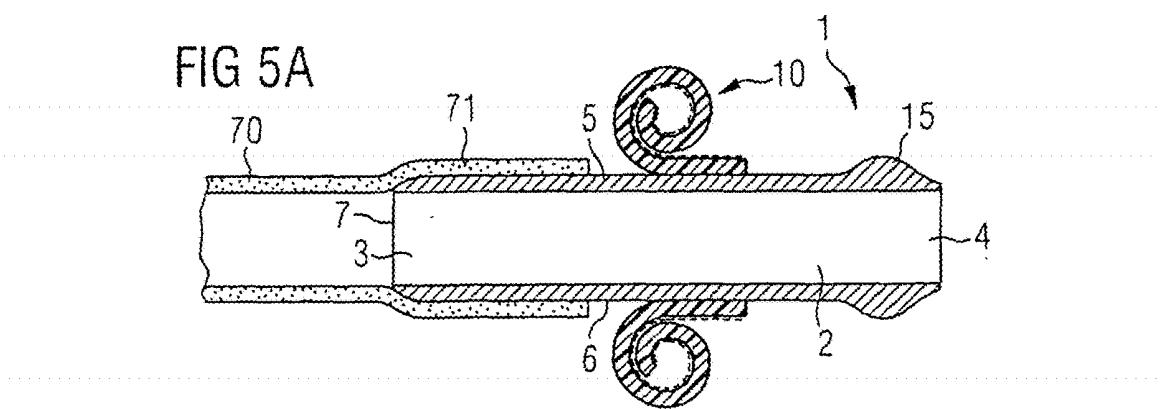


FIG 5B

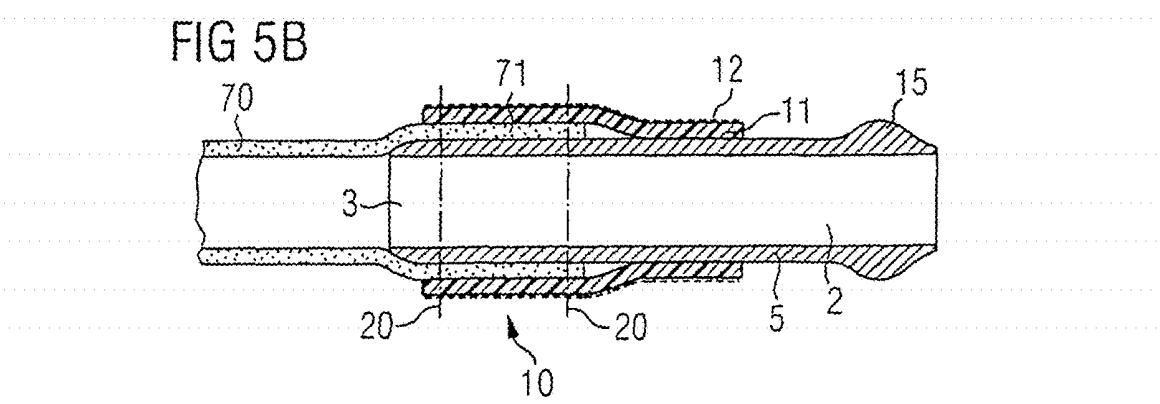


FIG 6A

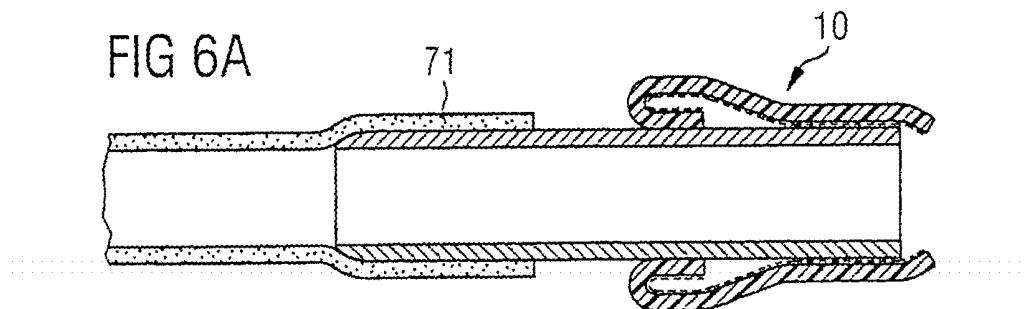


FIG 6B

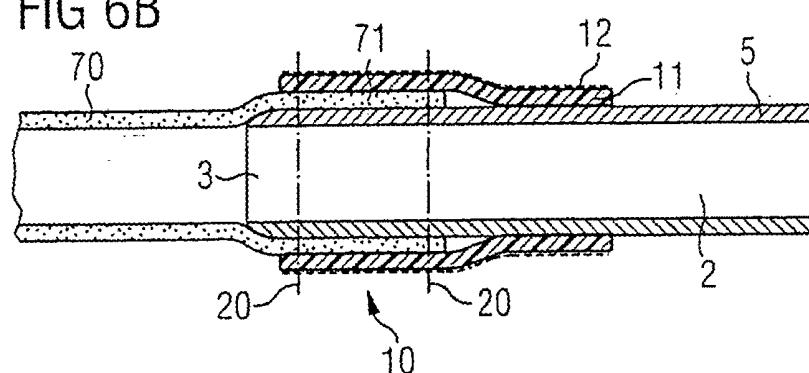


FIG 7A

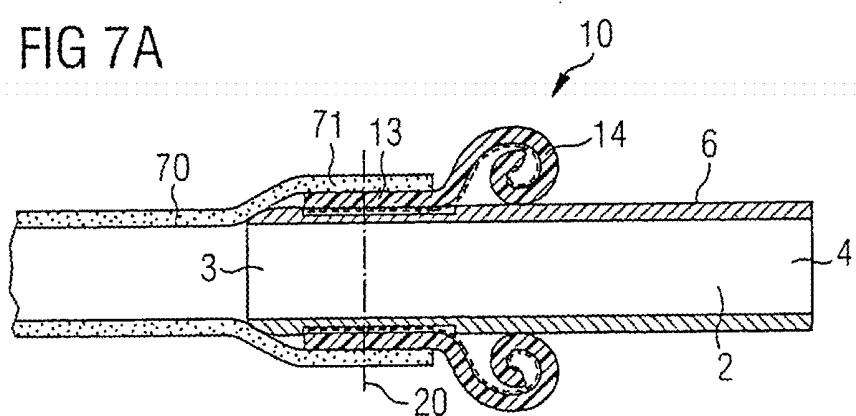


FIG 7B

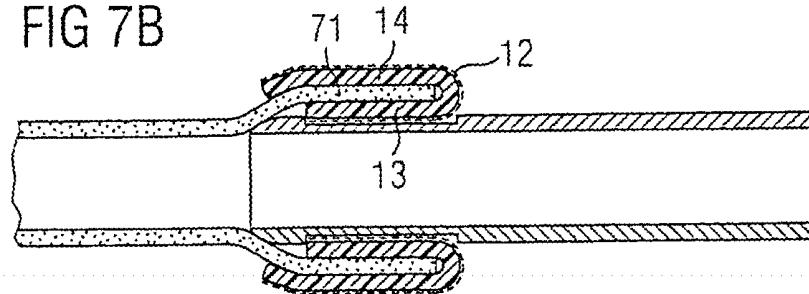


FIG 8A


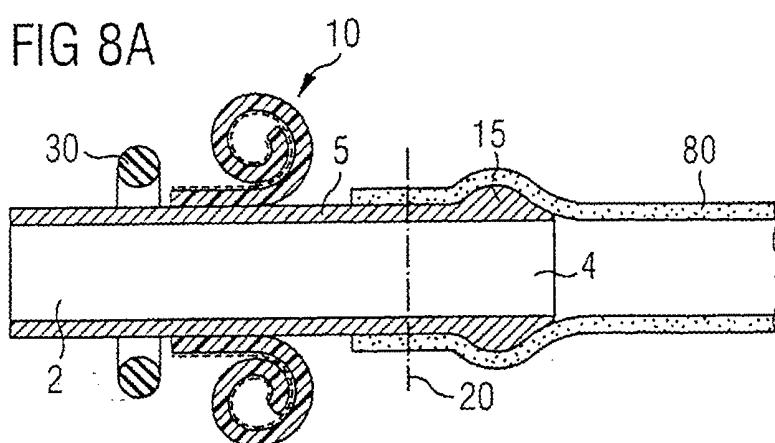


FIG 8B

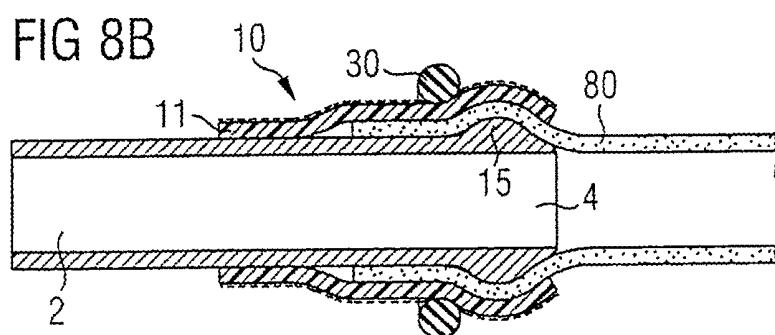

## IMPLANTABLE TISSUE CONNECTOR

### BACKGROUND OF THE INVENTION

[0001] The present invention relates to an implantable tissue connector that is specifically adapted to be connected to a tubular part of living tissue within a patient's body, such as to the end of the human's large bowel when an artificial exit to the large bowel is to be provided. However, the implantable tissue connector of the present invention is not limited to such application and can be used in connection with many other kinds of tubular living tissue, as will be described in more detail below.

[0002] Connecting the end of the human's large bowel to an artificial exit, such as to a fecal excrements collecting container, or connecting a shortened large bowel to the patient's natural intestinal exit has always proven difficult and often unreliable. Leakage can occur where the connection is not tight over the lifetime. Blood circulation can be prohibited in the end area of the bowel tissue, which can negatively affect the muscle functions and peristaltic movement of the bowel and which can even lead to starvation of the respective portion of the bowel. Furthermore, the peristaltic movement of the bowel will continuously act upon the connection and, thus, the connection can fail over time.

### SUMMARY OF THE INVENTION

[0003] It is therefore an object of the present invention to provide an implantable tissue connector for connecting tubular living tissue in a patient's body, which connection should be reliable over time and not severely harm the living tissue.

[0004] It is a further object to propose different uses for such tissue connector as well as methods for implanting the tissue connector in a patient's body.

[0005] Accordingly, the implantable tissue connector of the present invention comprises a conduit with at least a first and a second end and further having an outer surface.

[0006] According to the invention, there are provided special elements for preventing the tubular tissue from slipping off of the conduit. More particularly, the tissue connector comprises at least one bulge extending outwardly from the conduit's outer surface in a circumferential direction of the conduit about at least part of the conduit's circumference. Furthermore, at least one blocking ring is loosely fitted over the outer surface of the conduit with a clearance between the conduit's outer surface and the blocking ring for mounting living tissue within said clearance. The blocking ring has an inner cross sectional diameter which is smaller than or substantially identical to an outer cross sectional diameter of the at least one bulge so as to prevent the blocking ring from slipping over the bulge when living tissue is mounted within the clearance.

[0007] When the tissue connector is implanted in a human being or animal, the living tissue will be pulled over the conduit's outer surface including the bulge. Then the blocking ring will be advanced from the other side of the bulge over the living tissue towards the bulge such that at least part of the living tissue is located intermediate the conduit's outer surface and the blocking ring. This has the effect that, when the tissue tends to slip off of the conduit, it will carry the blocking ring towards and against the bulge. By this action, the living tissue will be compressed between the bulge and the blocking ring, thereby preventing any further

slippage. This effect is self-enhancing with increasing slipping force. As the force tends to decrease again, the compression force will decrease accordingly so that blood circulation within the living tissue will not be negatively affected longer than necessary. Thus, the connection will be reliable over time and not severely harm the living tissue.

[0008] The size of the clearance in a radial direction depends upon the intended use of the tissue connector, i.e. upon the thickness of the tubular living tissue to which the tissue connector is connected. Accordingly, the size may be at average between 0.1 to 0.4 mm, 0.4 to 0.8 mm, 0.8 to 1.3 mm, 1.3 to 2 mm, 2 to 3 mm, 3 to 4 mm, 4 to 5 mm, over 5 mm. The clearance should be slightly smaller than the thickness of the living tissue so as not to severely affect blood circulation within the living tissue but nevertheless ensure sufficient frictional contact.

[0009] While the cross-sectional diameter of the blocking ring should preferably be smaller than the cross-sectional diameter of the bulge, it can in some instances be identical or even somewhat larger than this because the thickness of the living tissue, even in a compressed state, adds up to the cross-sectional diameter of the bulge so that altogether the blocking ring is prevented from slipping over the bulge. Therefore, in case of particularly thick living tissue, the inner cross-sectional diameter of the blocking ring may be even somewhat larger than the outer cross-sectional diameter of the bulge.

[0010] In the regards of materials, both the conduit and the blocking ring should preferably be made from biocompatible material. This preferably comprises polymers, such as polytetrafluoroethylene (PTFE), ePTFE, silicone, polyurethane and/or polyetheretherketone (PEEK). However, other materials, such as ceramics and metals, in particular titanium and stainless steel, can be used as well and are preferable for their strength.

[0011] The conduit can be substantially longer than the particular portion of the conduit to which the tubular tissue is connected. In that case, it is preferable that the bulge is located proximately to the respective end of the conduit so that the part of the tissue drawn over the conduit is not excessively large. The larger the overlapping part of the tissue is, the larger may become problems of blood circulation within that part of the tissue.

[0012] Where the tissue connector is intended to connect two different ends of tubular living tissue material, it may have two of the aforementioned bulges, preferably located proximately to the respective ends of the conduit, with at least one and preferably at least two blocking rings located intermediate the two bulges. Of course, more than one blocking ring and/or more than one bulge may be provided for each end of the conduit.

[0013] In order to facilitate the step of inserting the end or ends of the conduit into the tubular living tissue, it is advantageous to taper the free end portion of the conduit's end or ends towards the edge of said free end portion. Alternatively or in addition, the free end portion may be provided with a rounded edge. The rounded edge will help to prevent any damage to the living tissue when the tissue is pulled over the free end of the conduit.

[0014] As mentioned at the outset, the use of the tissue connector of the present invention is not limited to its application at the end of the human's large bowel. It can be advantageously used in many other applications.

[0015] For instance, the tissue connector may be fitted into a human's esophagus. In this case, the conduit of the tissue connector should have an inner diameter of between 2 and 3.5 cm to provide for a snug fit. The clearance between the conduit and the blocking ring should be in the range of 2.5 to 5 mm.

[0016] Where the tissue connector is connected to a human's trachea, the inner diameter should be chosen between 1.5 and 2.5 cm, depending upon the position where at the human's trachea it is to be connected, in order to provide for a snug fit. The clearance between the conduit and the blocking ring should be in the range of 1 to 2 mm.

[0017] Where the tissue connector is fitted into a human stomach, the inner diameter of the conduit can vary with enlarged boundaries. The clearance between the conduit and the blocking ring should be in the range of 3.5 to 5 mm.

[0018] The tissue connector may also be fitted into a human's gall bladder or its connecting outlet channels. In that case, the conduit should have an inner diameter of between 0.5 and 1.3 cm. The clearance between the conduit and the blocking ring should be in the range of 0.5 to 1.5 mm.

[0019] In case that the tissue connector is fitted into a human's small bowel, the inner diameter of the conduit should be between 2 and 3 cm. The clearance between the conduit and the blocking ring should be in the range of 3 to 4 mm.

[0020] In case of the human's large bowel, whose diameter is highly stretchable, the inner diameter of the conduit should be between 3 and 5.5 cm to provide for a snug fit. The clearance between the conduit and the blocking ring should be in the range of 2 to 3.5 mm.

[0021] The tissue connector may also be fitted into a human's urethra. In this case, the conduit should have an inner diameter of between 0.4 and 0.8 cm. The clearance between the conduit and the blocking ring should be in the range of 0.5 to 1.5 mm.

[0022] Also, the tissue connector may be fitted into an human's ureter, in which case the inner diameter of the conduit should be chosen between 0.4 and 0.7 cm. The clearance between the conduit and the blocking ring should be in the range of 2 to 4 mm.

[0023] The tissue connector may also be connected to the kidney. In order to snugly fit it into a human's pelvic part of the kidney, the inner diameter of the conduit should be in the range of 1 and 5 cm, depending upon the position where at the human's pelvic it is to be connected. The clearance between the conduit and the blocking ring should be in the range of 0.5 to 1.5 mm.

[0024] The tissue connector may also be fitted into a human's blood vessel. In this case, the inner diameter of the conduit should be chosen approximately similar to the inner diameter of the respective blood vessel. As an example, the inner diameter may be chosen between 0.1 and 0.5 cm in the case of particularly small blood vessels. The tissue connector may as well be connected to the human's aorta or the heart's atrium or ventricle, in which case the inner diameter of the conduit is in the range of 2 to 3 cm. The clearance between the conduit and the blocking ring should be in the range of 1 to 2 mm.

[0025] The tissue connector may also be used as an intermediate piece to replace a part of tubular living tissue and may as well be used to connect different types of tubular

living tissue, such as where a biological transplant of a third party's body is to be connected to the organs of a patient.

[0026] According to a preferred embodiment of the invention, at least one flexible sleeve may be mounted on the outer surface of the conduit such that it axially extends around at least part of said conduit. According to a first embodiment, the flexible sleeve is initially mounted on said outer surface either folded or rolled upon itself. According to a second embodiment, the flexible sleeve is initially mounted on said outer surface so as to be foldable upon itself. According to a third, more general embodiment, the flexible sleeve is not initially mounted on the conduit but will be mounted thereon only at the time of implantation of the tissue connector in the patient's body.

[0027] The first end of the conduit of the tissue connector is connected to a tubular part of living tissue by inserting the first end of the conduit including the bulge into the tubular part of living tissue. Where, according to the first embodiment, the flexible sleeve is mounted on the outer surface of the conduit folded or rolled upon itself, the flexible sleeve is unfolded or unrolled such that at least part of the living tissue extending over the conduit's outer surface is located intermediate the sleeve and the outer surface of the conduit. Where, according to the second embodiment, the flexible sleeve is mounted on the outer surface of the conduit so as to be foldable upon itself, the flexible sleeve is folded upon itself such that at least part of the living tissue is located intermediate the folded sleeve or intermediate the conduit's outer surface and the sleeve. Where, according to the third embodiment, the flexible sleeve is provided separate from the conduit, the sleeve is advanced over the conduit and the respective portion of tubular tissue such that at least part of the living tissue is located intermediate the sleeve and the conduit's outer surface. In either of the aforementioned three embodiments, the flexible sleeve may or may not extend over the bulge.

[0028] Either way, the tubular tissue is located somewhere between the conduit and the flexible sleeve and can be held in that position in various manners that will be described in the following and that can be applied individually as well as in combination.

[0029] The advantages achieved with the tissue connector according to the aforementioned three preferred embodiments comprise a good sealing of the living tissue between the conduit and the flexible sleeve as well as good protection of the living tissue by the flexible sleeve. This way, the connection can be made reliable over time while also protecting the tissue against harm.

[0030] Where the flexible sleeve overlaps with the living tissue that has been drawn over the first end of the conduit, it is desirable that the flexible sleeve will exert radial pressure upon the tissue. In instances where strong and/or repeated movement of the tissue material is to be expected, such as when used as a bowel connector, the radial pressure will assist in holding the components in place until they are otherwise fixed against one another. In any case, it is preferable to design the flexible sleeve such that the radial pressure is minimal so as not to prohibit the blood circulation in the living tissue.

[0031] Furthermore, the conduit should be designed such that it is less flexible than the flexible sleeve at least in a radial direction so as to provide support to the sleeve against radial forces, in particular against the sleeve's aforementioned radial pressure. This way, the open internal cross

section of the conduit will not be affected by the radial forces caused by the flexible sleeve.

[0032] Another particularly preferred way of reliably connecting the living tissue to the tissue connector involves a flexible sleeve that comprises a porous ingrowth layer allowing ingrowth of living tissue. This will not only strengthen any connection between the tissue connector and the tissue but will also serve to further seal the connection against any leakage.

[0033] The ingrowth layer should be made from a material that stimulates tissue ingrowth. Preferably, the ingrowth layer has a netlike structure that can be penetrated by ingrowing tissue, thereby creating a durable connection between the living tissue and the flexible sleeve. Of course, the ingrowth layer should be made from a biocompatible material, such as Dacron®.

[0034] Another way of reliably fixing the living tissue to the tissue connector consists in suturing the flexible sleeve to the living tissue. Alternatively, the suturing may be performed through the flexible sleeve and an outer wall of the conduit including an interposed portion of the living tissue. Thereby, the tissue is fixed to both the flexible sleeve and the conduit. Leakage through needle penetrations caused by the suturing, if any, will automatically close over time by overgrowing tissue material.

[0035] It is also possible to perform the suturing through a portion of the living tissue and the outer wall of the conduit before the flexible sleeve is placed over the living tissue. This eliminates any problems of leakage through the penetration holes caused by the suturing as the sleeve will cover and seal such penetration holes.

[0036] Preferably, the thread used for suturing is made from a material that is absorbable by the patient's body. Typically, the thread will be absorbed by the body within about 6 weeks. At that time, however, the tissue ingrowth will be sufficiently advanced to compensate for the loss of strength that was initially provided by the thread.

[0037] Instead or in addition to suturing the flexible sleeve to the conduit by means of a preferably absorbable thread, the sleeve may be fixedly connected to the conduit along an axially extending portion of the sleeve in any other appropriate way. For instance, the conduit and the sleeve may be bonded along at least part of said axially extending portion of the sleeve. A primer may be applied on the conduit's outer surface and/or the flexible sleeve to enhance bonding characteristics.

[0038] The flexible sleeve may comprise a multi-layer material. This is particularly advantageous where the flexible sleeve comprises the aforementioned porous ingrowth layer. For instance, the porous ingrowth layer might itself not be sufficiently stable to be safely handled and pulled over the tubular tissue and/or the porous ingrowth layer might not be able to exert the radial pressure onto the tissue. In either of these cases, it is advantageous to provide the flexible sleeve with a support layer for supporting the porous ingrowth layer.

[0039] The support layer may be made e.g. from polyurethane or from expanded polytetrafluoroethylene (ePTFE). ePTFE is particularly preferred as it can be designed with pores sufficiently large in size so as to allow for the necessary exchange of particles and/or elements between the underlying tissue and the surrounding area of the patient's body. Furthermore, the support layer may give better protection to the tissue than the ingrowth layer.

[0040] It is preferable when after implantation the support layer forms an outer layer of the flexible sleeve or, at least, that the ingrowth layer will be located radial inward from the support layer. Thus, where the flexible sleeve is mounted on the outer surface of the conduit so as to be foldable up on itself, the ingrowth layer will be located between portions of the support layer when the sleeve is folded upon itself. Alternatively, where the flexible sleeve is mounted on the outer surface of the conduit folded or rolled upon itself, the ingrowth layer will be located radial inward from the support layer when the sleeve is unfolded or unrolled.

[0041] Where the tissue connector is intended for connecting with one another two different ends of tubular living tissue, the conduit may have one flexible sleeve at each of the conduit's first and second ends. Again, the flexible sleeves are preferably located proximately to said first and second ends.

[0042] Of course, it is again preferable to make the flexible sleeve from a biocompatible material, in particular polymer materials similar to those mentioned above in relation to the conduit (except that PEEK would not be suitable).

[0043] The tissue connector may particularly be used and be adapted for connecting it to at last one of an implantable reservoir, an implantable pump, an implantable motor, an implantable medical device and a biological transplant. The artificial items may even form a part of the tissue connector, either integrally formed therewith or separately connected thereto. The reservoir, pump, motor and/or medical device may also be incorporated in the tissue connector between the first and second ends of the conduit.

[0044] The biological transplant may be any transplant, such as a transplanted heart to be connected by means of the tissue connector to the patient's aorta and/or to other blood vessels (pulmonary arteria etc.).

[0045] Instead of being artificial, the aforementioned reservoir may consist of a biological transplant, but it may as well be made from tissue material of the patient into whom the reservoir is to be implanted. For instance, the reservoir may be a fecal excrements collecting container, such as a urine bladder or an intestine.

[0046] The reservoir may also be a reservoir for medical drugs for the patient's needs and is preferably adapted to be filled with at least one medical drug. Such medical drug reservoir may or may not be connected to a medical device, such as an implantable drug delivery device, which medical device may additionally include a pump for pumping the drug from the reservoir into the patient's body and possibly a motor for the pump.

[0047] Any other implantable medical devices may also be connected to the organs of the patient by means of the tissue connector, with or without a pump, motor and/or reservoir. Examples of these are an artificial heart, a penile prosthesis, an artificial urine bladder, an artificial urethra, an artificial esophagus, an artificial trachea and the like. Examples of biological transplants include a urine bladder, an intestine, a urethra, a ureter, a kidney, a bowel, a heart, an esophagus, a trachea, a blood vessel and the like.

[0048] The tissue connector of the present invention can be implanted in a human being or animal either in open surgery or by subcutaneous surgery. In either case, the skin will have to be cut before free-dissecting an appropriate location within the patient's body adjacent to the tubular living tissue and, after the conduit of the tissue connector has

been connected with one or both ends to the tubular tissue, at least the skin will have to be sutured at the end of the surgery.

[0049] Where the tissue connector is implanted by subcutaneous surgery, the steps of cutting the skin and free-dissecting the appropriate location within the patient's body comprise the steps of

- [0050] inserting a needle-like tube into the patient's body, such as the patient's thorax or abdomen,
- [0051] filling through said needle gas into the patient's body, i.e. into the thorax cavity or abdomen cavity,
- [0052] cutting a key-hole,
- [0053] inserting at least one, preferably two, laparoscopic trocars through the key-hole towards said location,
- [0054] advancing one or more medical instruments and a camera through the at least one trocar towards said location, i.e. into the thorax or abdomen, and
- [0055] dissecting an area of the tubular part of living tissue with the aid of the dissecting tool.

[0056] The tissue connector may be supplied to said location through the at least one trocar or through a separate incision.

[0057] The invention will now be described in more detail in context with some preferred embodiments of the invention as shown in the accompanying drawings.

#### BRIEF DESCRIPTION OF THE DRAWINGS

[0058] FIG. 1 shows an exemplary view of a patient with one tissue connector connected to the patient's aorta and another tissue connector connected to the end of the patient's large bowel.

[0059] FIG. 2 shows a cross section of a first embodiment of the tissue connector in a state connected to living tissue.

[0060] FIG. 3 shows a second embodiment of the tissue connector with two connecting ends.

[0061] FIG. 4 shows a third embodiment of the tissue connector as an alternative to the second embodiment.

[0062] FIGS. 5a and 5b show an alternative for mounting living tissue on a free end of the tissue connector.

[0063] FIGS. 6a and 6b show another alternative for mounting living tissue on a free end of the tissue connector.

[0064] FIGS. 7a and 7b show a further alternative for mounting living tissue on a free end of the tissue connector.

[0065] FIGS. 8a and 8b show a combination of an embodiment similar to the one shown in FIG. 2 with additional mounting means as shown in FIGS. 5a and 5b.

[0066] FIG. 1 schematically shows a body 100 of a patient with a first tissue connector 1 connected to the end of the patient's large bowel 50 and a second tissue connector 1a interconnecting two pieces of the patient's aorta 60. The tissue connector 1 may either connect the large bowel 50 to the patient's anus or to an artificial anus which may include an excrements collecting container. The tissue connector 1a may include between its two ends a heart valve, a blood pump, a drug delivery device or the like.

[0067] The tissue connectors 1 and 1a shown in FIG. 1 represent only a few of many different possible locations and applications of the tissue connector within the human's or, alternatively, an animal's body. Further examples of possible applications have already been outlined further above.

[0068] FIG. 2 shows a first embodiment of the tissue connector 1 connected to a tubular part of living tissue 80. The tissue connector 1 comprises a conduit 2 with a first end

3 and a second end 4. The second end 4 of the conduit 2 has already been inserted into an end portion of living tissue 80. The inner cross section of the conduit 2 is selected to approximately match the inner cross section of the tubular living tissue 80 so as not to obstruct any flow of material. The thickness of the wall 5 of the conduit, which is typically circular, is chosen to provide sufficient strength so that it does not collapse under the forces that will act upon the conduit during use, while providing sufficient flexibility where needed. On the other hand, the thickness should not be chosen too large since the living tissue will have to be stretched over the outer surface 6 of the conduit 2 without damage and without excessively affecting blood circulation within the end portion 81 of the living tissue 80.

[0069] The wall 5 of conduit 2 is tapered towards its leading edge 7. In addition, the leading edge 7 is rounded. These two measures prevent damage to the living tissue 80 when the conduit 2 is inserted into the end portion 81 of the living tissue 80.

[0070] The first end 3 may serve and be adapted to be connected to an implantable medical device, an implantable reservoir, an implantable pump, an implantable motor or a combination of the afore mentioned items (generally designated with 200). It may also be connected to any other implantable device 200. The implantable device 200 may even form a part of the tissue connector 1, either integrally or attached thereto.

[0071] The implantable device 200 may also be a medical device replacing one or more of the patient's organs, such as an artificial urine bladder, a fecal excrement's collecting container, an artificial urethra, an artificial heart, an artificial esophagus, an artificial trachea or the like. Alternatively, the first end 3 of the conduit 2 may be connected to a biological implant obtained from a third party's body, such as a urine bladder, an intestine, a urethra, a ureter, a kidney, a bowel, a heart, an esophagus, a trachea, a blood vessel or the like.

[0072] The device 200 may also comprise a flow restrictor for partial or complete restriction of flow through the conduit. This can be suitable e.g. in the case where the tissue connector is located at the end of the patient's large bowel.

[0073] The device 200 may also be placed between the tissue connector 1 and a second tissue connector 1b with conduit 2b, as is indicated in FIG. 2 by dotted lines. This arrangement is practical where the device 200 has to be placed at a location within one of the patient's organs, such as in a blood vessel, in which case the blood vessel would be divided and the device 200 placed between the two tissue connectors 1 and 1b connected to the respective free ends of the divided blood vessel. As an example, the device 200 could include a flow restrictor, such as an artificial heart valve, or a drug delivery reservoir.

[0074] Apart from the conduit 2 and the optional device 200, the tissue connector 1 of the embodiment shown in FIG. 2 has a bulge 15 that extends outwardly from the conduit's outer surface 6 in a circumferential direction of the conduit 2 about at least a part of the conduit's circumference. Furthermore, at least one blocking ring 30 loosely fitting over the outer surface 6 of the conduit 2 with a clearance between the outer surface 6 and the blocking ring 30 is provided for mounting the tubular living tissue 80 within the clearance. The blocking ring has an inner cross-sectional diameter which is about the same as the outer cross-sectional diameter of the bulge 15. This prevents the blocking ring

from slipping over the bulge when the living tissue **80**, as shown in FIG. 2, is mounted within the clearance.

[0075] When an axial force tends to pull the tubular living tissue **80** from the outer surface **6** of the conduit **2**, the blocking ring **30** will move with the tubular tissue **80**, thereby compressing the tubular tissue **80** against the bulge **15**, so as to prevent any further slippage of the tubular tissue **80** over the bulge **15**. This is a self-enhancing effect. Preferably, the blocking ring in this and in the subsequently described embodiments is made from a material that has a friction coefficient in relation to living human (outer) mucosa tissue that is higher than a friction coefficient which the conduit's outer surface has in relation to living human (inner) serosa tissue.

[0076] FIG. 3 shows a second embodiment of the tissue connector **1** comprising the conduit **2** with each of its first and second ends **3** and **4** having a circumferential bulge **15**. Between the two bulges **15** two blocking rings **30** are arranged. Tubular living tissue **80** has been pulled over the conduit **2** and through the blocking rings **30**, and the blocking rings **30** have then been pushed into a position closest to the bulges **15**. Therefore, when stretching forces are applied to the tubular tissue **80** in the one or the other direction, depending upon the direction one of the two blocking rings **30** will move towards the associated bulge **15**, thereby clamping the tissue **80** between the blocking ring **30** and the bulge **15** and prohibiting any further slippage of the tissue **80** off the conduit **2**.

[0077] The embodiment shown in FIG. 3 is particularly suitable to strengthen weak sections in a tubular part of living tissue or to seal a porous section, such as a porous section of the patient's intestine.

[0078] The same tissue connector as shown in FIG. 3 may also be used to connect two separate ends of tubular tissue or to connect one end of tubular tissue with another end of a hose or the like that may lead e.g. to an implantable medical device or to an exit port, such as an artificial body exit.

[0079] FIG. 4 shows a third embodiment that can be used as an alternative to the embodiment previously discussed in relation to FIG. 3. Again, the conduit **2** has two bulges **15** to prevent the tubular tissue **80** from slipping off of the conduit. However, in this embodiment the bulges **15** are arranged in close proximity to one another so that a single blocking ring **30** located between the two bulges **15** in an axial direction of the conduit will be sufficient to cooperate with one or the other of the two bulges **15** depending upon the direction of the stretching force acting upon the tissue **80**.

[0080] FIGS. 5a and 5b show an alternative for mounting living tissue on the free end **3** of the tissue connector **1** to either another part of living tissue **70** or to a hose. Apart from the conduit **2** and the bulge **15** at the second end of the conduit **2**, the tissue connector **1** of the embodiment shown in FIG. 5a has a flexible sleeve **10** axially extending and closely fitted around a part of the outer surface **6** of the conduit **2**. The flexible sleeve **10** may be delivered separately from the conduit **2** and placed over the conduit's outer surface **6** shortly before implantation into the patient's body. However, it is preferred to provide the conduit **2** with the flexible sleeve **10** as a unitary item, the flexible sleeve **10** preferably fixed to the outer surface **6** by means of bonding, welding and/or clamping. In the case of bonding, it can be

advisable to pretreat the outer surface **6** e.g. with a primer, depending upon the material combination to be bonded together.

[0081] In FIG. 5a, the flexible sleeve **10** is rolled upon itself and can be unrolled over the portion **71** of living tissue **70** so as to cover, seal and protect that portion **71** on the first end **3** of the conduit **2**, as is shown in FIG. 5b. The tissue portion **71** and the overlapping part **11** of flexible sleeve **10** are fixed to the first end **3** of the conduit **2** by suturing threads **20** therethrough and through the wall **5** of the conduit **2**, as is indicated in FIG. 5b by dotted lines.

[0082] The flexible sleeve **10** is a multilayer material comprising a porous ingrowth layer to allow ingrowth of living tissue. For that, it has a netlike structure. On top of the ingrowth layer **11** there is provided a support layer **12**. The support layer **12** may have one or more of various functions. One possible function is to provide support to the ingrowth layer **11** so as to ease handling and/or prevent fusing of the ingrowth layer. Also, the support layer **12** may provide some tension, thereby exerting a compressive force in a radial direction so as to slightly clamp the tissue portion **71** against the outer surface **6** of the conduit **2**. For that, the support layer should have an appropriate elasticity. Finally, the support layer may provide protection for the tissue portion **71**.

[0083] Preferably, the support layer should be porous so that exchange between the tissue portion **71** and the surrounding area within the patient's body is possible. This is an important aspect for the ingrowth of living tissue material into suitable, as it is flexible, inert and can be made with any desired porosity. Other biocompatible polymers, such as polyurethane and the like, are suitable as well.

[0084] FIGS. 6a and 6b show an alternative which differs from the connector shown in FIGS. 5a and 5b solely by the fact that the flexible sleeve **10** is not rolled upon itself but, instead, folded upon itself. By unfolding the folded sleeve **10**, it can be placed over the tissue portion **71** in the same manner as discussed above in relation to FIGS. 5a, 5b, as is shown in FIG. 6b.

[0085] FIGS. 7a and 7b show another alternative where the flexible sleeve **10** is arranged such that it is foldable upon itself. More particularly, the first end **3** of the conduit **2** is inserted in the tissue portion **71** of living tissue **70** to an extent that it overlaps a first portion **13** of the flexible sleeve **10**. The remaining portion **14** of the flexible sleeve **10** not being covered by the tissue portion **71** is rolled upon itself and can be unrolled so as to cover the tissue portion **71**. As a result shown in FIG. 7b, the flexible sleeve **10** is folded upon itself with the tissue portion **71** placed intermediate the folded sleeve **10**.

[0086] Different to the alternatives described before, suturing the tissue portion **71** to the wall **5** of the conduit **2** is carried out before the tissue portion **71** is covered with the remaining part **14** of the flexible sleeve **10**. The remaining part **14** thereby seals any penetration holes caused by the suturing.

[0087] In an even further alternative, not shown, the first end **3** of the conduit **2** will be inserted in the tissue portion **71** only so far that the tissue portion **71** does not overlap with the flexible sleeve **10**. Thus, after unrolling the flexible sleeve **10**, only a part of the folded sleeve **10** will cover the tissue portion **71**.

[0088] Furthermore, also not shown, the remaining part **14** of the sleeve **10** is not necessarily rolled upon itself, as

shown in FIG. 7a, but may lay flat against the outer surface 6 of the conduit 2, similar to the embodiment shown in FIG. 6a.

[0089] As will be recognized, the portion 13 of the flexible sleeve 10 is arranged in a circumferential groove provided in the outer surface 6 of the conduit 2. It is advantageous when the depth of the groove corresponds to the thickness of the flexible sleeve 10. This will facilitate introducing the first end 3 of the conduit 2 into the living tissue 70.

[0090] Any of the described flexible sleeve connections can be combined with the bulge locking ring locking mechanism. Of these variants, only one shall exemplary be described in the following in relation to FIGS. 8a and 8b. The embodiment shown in FIGS. 8a and 8b substantially correspond to the embodiment of FIGS. 5a and 5b, where the flexible sleeve 10 is rolled upon itself and then unrolled to cover the tubular tissue 80 which, in this case, is pulled over the second end 4 of the conduit 2 sufficiently far so as to extend also over the bulge 15. After the flexible sleeve 10 has been unrolled over the tubular tissue 80, the blocking ring 30 is pushed over the flexible sleeve against the bulge 15. After a while, the threads 20 sutured to the tubular tissue 80 and the wall 5 of the conduit 2 (FIG. 8a) will have been absorbed by the patient's body and, about during the same time, living tissue will have formed in and connect the tubular tissue 80 to the ingrowth layer 11 of the flexible sleeve 10. Therefore, as the tubular tissue 80 tends to be pulled off of the second end 4 of the conduit 2, the blocking ring 30 will also be moved, press the tubular tissue 80 and the flexible sleeve 10 against the bulge 15 and thereby prohibit any further slippage of the tubular tissue 80 over the bulge 15. The friction coefficient between the blocking ring 30 and the outer surface of the flexible sleeve should be higher than the friction coefficient which the conduit's outer surface 6 has in relation to the tubular tissue 80.

[0091] Note that the flexible sleeve 10 in its unrolled state as shown in FIG. 6b must not necessarily extend over the bulge 15 but can end a distance away from the bulge. In that situation, the blocking ring 30 would not clamp the sleeve 10 against the bulge 15 but only the living tissue 80.

1. An implantable tissue connector adapted so as to be connectable to a tubular part of living tissue within a patient's body, comprising

a conduit having at least a first end and a second end and further having an outer surface with at least one bulge extending outwardly from the conduit's outer surface in a circumferential direction of the conduit about at least a part of the conduit's circumference, and

at least one blocking ring loosely fitting over the outer surface of the conduit with a clearance between the outer surface and the blocking ring for mounting tubular living tissue within the clearance, said blocking ring having an inner cross sectional diameter which is smaller than or substantially identical to an outer cross sectional diameter of the at least one bulge so as to prevent the blocking ring from slipping over the bulge when living tissue is mounted within the clearance.

2. The tissue connector of claim 1, wherein the conduit is made from a biocompatible material.

3. The tissue connector of claim 2, wherein the biocompatible material of the conduit is a material of the following group of materials comprising: titanium, stainless steel, ceramics, polytetrafluoroethylene (PTFE), expanded poly-

tetrafluoroethylene (ePTFE), polyetheretherketone (PEEK), silicone, polyurethane, polypropylene, other biocompatible polymer material.

4. The tissue connector of any of claims 1 to 3, wherein the blocking ring is made from a biocompatible material.

5. The tissue connector of claim 4, wherein the biocompatible material of the blocking ring is a material of the following group of materials comprising: titanium, stainless steel, ceramics, polytetrafluoroethylene, silicone, polyurethane.

6. The tissue connector of any of claims 1 to 5, wherein the blocking ring is made from a material that has a friction coefficient in relation to living human mucosa tissue that is higher than a friction coefficient which the conduit's outer surface has in relation to living human serosa tissue.

7. The tissue connector of any of claims 1 to 6, wherein the at least one bulge is located proximally to said first end of the conduit.

8. The tissue connector of any of claims 1 to 6, wherein the conduit has at least two of said bulges with the at least one blocking ring being located intermediate said at least two bulges.

9. The tissue connector of claim 8, blocking rings located intermediate said at least two bulges are each located proximate one of said at least first and second ends of the conduit.

10. The tissue connector of any of claims 8 to 9, wherein the at least two bulges are each located proximate one of said at least first and second ends of the conduit.

11. The tissue connector of any of claims 1 to 10, wherein—depending upon the intended use—the clearance is in the range of one of the following ranges: 0.1 to 0.4 mm, 0.4 to 0.8 mm, 0.8 to 1.3 mm, 1.3 to 2 mm, 2 to 3 mm, 3 to 4 mm, 4 to 5 mm, over 5 mm.

#### FLEXIBLE SLEEVE

12. The tissue connector of any of claims 1 to 11, further comprising at least one flexible sleeve adapted to axially extend and closely fit around at least part of said outer surface of the conduit.

13. The tissue connector of claim 12, wherein the flexible sleeve is made from a biocompatible material.

14. The tissue connector of claim 13, wherein the biocompatible material of the flexible sleeve comprises at least one polymer.

15. The tissue connector of claim 14, wherein the at least one polymer is a polymer of the following group of polymers comprising: polytetrafluoroethylene, silicone, polyurethane, expanded polytetrafluoroethylene (ePTFE).

16. The tissue connector of any of claims 12 to 15, wherein said flexible sleeve is mounted on said outer surface either folded or rolled upon itself or so as to be foldable upon itself.

17. The tissue connector of claim 16, wherein, where the flexible sleeve is mounted on the outer surface of the conduit so as to be foldable upon itself, the flexible sleeve, when folded upon itself, will exert radial pressure.

18. The tissue connector of claim 17, wherein, when implanted in a patient's body with the sleeve folded upon itself, the tissue connector is adapted to exert said radial pressure on any living tubular tissue placed intermediate the folded sleeve.

19. The tissue connector of claim 16, wherein, where the flexible sleeve is mounted on the outer surface of the conduit

folded or rolled upon itself, the flexible sleeve, when unfolded or unrolled, will exert radial pressure.

**20.** The tissue connector of claim **19**, wherein, when implanted in a patient's body with the sleeve unfolded or unrolled, the tissue connector is adapted to exert said radial pressure on any living tubular tissue placed intermediate the sleeve and the outer surface of the conduit.

**21.** The tissue connector of any of claim **18** or **20**, wherein said radial pressure is minimal such that blood circulation in living tissue is not prohibited.

**22.** The tissue connector of any of claims **12** to **21**, wherein the conduit is less flexible than the flexible sleeve at least in a radial direction so as to provide support to the sleeve against radial forces.

**23.** The tissue connector of any of claims **12** to **22**, wherein the flexible sleeve comprises a porous ingrowth layer allowing ingrowth of living tissue.

**24.** The tissue connector of claim **23**, wherein the ingrowth layer has a net-like structure.

**25.** The tissue connector of any of claim **23** or **24**, wherein the ingrowth layer is made from Dacron®.

**26.** The tissue connector of any of claims **12** to **25**, wherein the flexible sleeve comprises a multilayer material.

**27.** The tissue connector of any of claims **23** to **25**, wherein the flexible sleeve further comprises a support layer for supporting said porous ingrowth layer.

**28.** The tissue connector of claim **27**, wherein the support layer is made from expanded polytetrafluoroethylene (ePTFE) or polyurethane.

**29.** The tissue connector of any of claims **27** to **28** including claim **16**, wherein, where the flexible sleeve is mounted on the outer surface of the conduit so as to be foldable upon itself, the ingrowth layer will be located between portions of the support layer when the sleeve is folded upon itself.

**30.** The tissue connector of any of claims **27** to **28** including claim **16**, wherein, where the flexible sleeve is mounted on the outer surface of the conduit folded or rolled upon itself, the ingrowth layer will be located radial inward from the support layer when the sleeve is unfolded or unrolled.

**31.** The tissue connector of any of claims **12** to **30**, wherein the conduit and the flexible sleeve are fixedly connected to each other along an axially extending portion of the sleeve.

**32.** The tissue connector of claim **31**, wherein the conduit and the flexible sleeve are bonded along at least part of said axially extending portion of the sleeve.

**33.** The tissue connector of claim **32**, comprising a primer on at least one of the conduit and the flexible sleeve to enhance bonding characteristics.

**34.** The tissue connector of any of claims **1** to **33**, wherein the at least one flexible sleeve is located proximately to said first end of the conduit.

**35.** The tissue connector of any of claims **1** to **34**, wherein the conduit has at least two of said flexible sleeves.

**36.** The tissue connector of claim **35**, wherein the at least two flexible sleeves are each located proximately to one of said at least first and second ends of the conduit.

**37.** The tissue connector of any of claims **1** to **36**, wherein the first end of the conduit has a free end portion and tapers towards the edge of said free end portion.

**38.** The tissue connector of any of claims **1** to **37**, wherein the first end of the conduit has a free end portion with a rounded edge.

#### COMMON FEATURES

**39.** The tissue connector of any of claims **1** to **38**, wherein said second end of the conduit is adapted for connecting the tissue connector to at least one of the following items: an implantable reservoir, an implantable pump, an implantable motor, an implantable medical device, a biological transplant.

**40.** The tissue connector of any of claims **1** to **39**, wherein between the first and second ends of the conduit or connected to the second end of the conduit, there is provided at least one of the following items: a reservoir, a pump, a motor, a medical device.

**41.** The tissue connector of claim **40**, wherein the reservoir is artificial or a biological transplant or made from tissue material of a patient into whom the reservoir is to be implanted.

**42.** The tissue connector of any of claims **39** to **41**, wherein the reservoir is a fecal excrements collecting container.

**43.** The tissue connector of claim **42**, wherein the fecal excrements collecting container comprises one of the following: a urine bladder, an intestine.

**44.** The tissue connector of any of claims **39** to **41**, wherein the reservoir is adapted to be filled with at least one medical drug for patient needs.

**45.** The tissue connector of claim **40**, wherein said medical device is a device of the following group of devices comprising: a drug delivery system, an artificial urine bladder, a fecal excrements collecting container, an artificial urethra, an artificial heart, an artificial esophagus, an artificial trachea.

**46.** The tissue connector of claim **40**, wherein said biological transplant is a transplant of the following group of transplants comprising: a urine bladder, an intestine, a urethra, a ureter, a kidney, a bowel, a heart, an esophagus, a trachea, a blood vessel.

**47.** The tissue connector of any of claims **1** to **46**, comprising a flow restrictor for partial or complete restriction of flow through the conduit.

**48.** The tissue connector of any of claims **1** to **47**, wherein the conduit has an inner diameter of between 0.1 and 0.5 cm.

**49.** The tissue connector of any of claims **1** to **47**, wherein the conduit has an inner diameter of between 0.5 and 1 cm.

**50.** The tissue connector of any of claims **1** to **47**, wherein the conduit has an inner diameter of between 1 and 2 cm.

**51.** The tissue connector of any of claims **1** to **47**, wherein the conduit has an inner diameter of between 2 and 3 cm.

**52.** The tissue connector of any of claims **1** to **47**, wherein the conduit has an inner diameter of between 3 and 4 cm.

**53.** The tissue connector of any of claims **1** to **47**, wherein the conduit has an inner diameter of 4 cm or over.

**54.** The tissue connector of any of claims **1** to **47**, wherein said conduit is sized so as to be snuggly fitted into a human's esophagus.

**55.** The tissue connector of any of claims **1** to **47**, wherein said conduit is sized so as to be snuggly fitted into a human's trachea.

**56.** The tissue connector of any of claims **1** to **47**, wherein said conduit is sized so as to be snuggly fitted into a human's stomach.

**57.** The tissue connector of any of claims 1 to 47, wherein said conduit is sized so as to be snuggly fitted into a human's gall bladder or its connecting outlet channels.

**58.** The tissue connector of any of claims 1 to 47, wherein said conduit is sized so as to be snuggly fitted into a human's small bowel.

**59.** The tissue connector of any of claims 1 to 47, wherein said conduit is sized so as to be snuggly fitted into a human's large bowel.

**60.** The tissue connector of any of claims 1 to 47, wherein said conduit is sized so as to be snuggly fitted into a human's urethra.

**61.** The tissue connector of any of claims 1 to 47, wherein said conduit is sized so as to be snuggly fitted into a human's ureter.

**62.** The tissue connector of any of claims 1 to 47, wherein said conduit is sized so as to be snuggly fitted into a human's pelvic part of the kidney.

**63.** The tissue connector of any of claims 1 to 47, wherein said conduit is sized so as to be snuggly fitted into a human's blood vessel.

**64.** The tissue connector of claim 63, wherein said conduit is sized so as to be snuggly fitted into the human's aorta or the heart's atrium or ventricle.

#### USE

**65.** A use of the tissue connector of any of claims 1 to 47 as a connector to the human's esophagus.

**66.** A use of the tissue connector of any of claims 1 to 47 as a connector to the human's trachea.

**67.** A use of the tissue connector of any of claims 1 to 47 as a connector to the human's stomach.

**68.** A use of the tissue connector of any of claims 1 to 47 as a connector to the human's gall bladder or its connecting outlet channels.

**69.** A use of the tissue connector of any of claims 1 to 47 as a connector to the human's small bowel.

**70.** A use of the tissue connector of any of claims 1 to 47 as a connector to the human's large bowel.

**71.** A use of the tissue connector of any of claims 1 to 47 as a connector to the human's urethra.

**72.** A use of the tissue connector of any of claims 1 to 47 as a connector to the human's ureter.

**73.** A use of the tissue connector of any of claims 1 to 47 as a connector to the human's pelvic part of the kidney.

**74.** A use of the tissue connector of any of claims 1 to 47 as a connector to the human's blood vessel.

**75.** The use of the tissue connector of claim 74 as a connector to the human's aorta or the heart's atrium or ventricle.

**76.** A use of the tissue connector of any of claims 1 to 47 as a connector between the human's kidney and a reservoir.

**77.** A use of the tissue connector of any of claims 1 to 47 as a connector between the human's intestine and a reservoir.

**78.** The use of the tissue connector of any of claim 76 or 77, wherein the reservoir is artificial or a biological transplant.

#### METHOD OF TREATMENT (IMPLANTATION)

**79.** A method of treating a human being or an animal by implanting the tissue connector of any of claims 1 to 38 in a patient's body, comprising the steps of

cutting the skin,

free-dissecting a location within the patient's body adjacent a tubular part of living tissue,

connecting the first end of the conduit of the tissue connector to a first section of the tubular part of living tissue by inserting the first end of the conduit including the bulge into the first section of the tubular part of living tissue and advancing the blocking ring over the living tissue towards the bulge such that at least part of the living tissue is located intermediate the conduit's outer surface and the blocking ring, and

suturing at least the skin after connecting the living tissue to the tissue connector has been completed.

**80.** A method of treating a human being or an animal by implanting the tissue connector of any of claims 12 to 38 in a patient's body, comprising the steps of

cutting the skin,

free-dissecting a location within the patient's body adjacent to a tubular part of living tissue,

connecting the first end of the conduit of the tissue connector to a first section of the tubular part of living tissue by inserting the first end of the conduit including the bulge into the first section of the tubular part of living tissue and, where the flexible sleeve is mounted on the outer surface of the conduit so as to be foldable upon itself, folding the flexible sleeve upon itself such that at least part of the living tissue is located intermediate the folded sleeve or intermediate the conduit's outer surface and the sleeve or, where the flexible sleeve is mounted on the outer surface of the conduit folded or rolled upon itself, unfolding or unrolling the flexible sleeve such that at least part of the living tissue is located intermediate the sleeve and the outer surface of the conduit, and advancing the blocking ring over the living tissue towards the bulge such that at least part of the living tissue is located intermediate the conduit's outer surface and the blocking ring, and

suturing at least the skin after connecting the living tissue to the tissue connector has been completed.

**81.** The method of claim 80, wherein during the step of folding the flexible sleeve upon itself a portion of the sleeve is unrolled.

**82.** The method of claim 80, wherein, after the step of folding the sleeve upon itself or after the step of unfolding or unrolling the sleeve, the sleeve is fixed to the living tissue by suturing.

**83.** The method of any of claims 79 to 82, wherein suturing is performed through an outer wall of the conduit including a portion of the living tissue.

**84.** The method of any of claim 82 or 83, wherein a thread is used for suturing which is made from a material that is absorbable by a patient's body.

**85.** The method of any of claims 79 to 84, comprising the step of connecting the second end of the conduit of the tissue connector to a different type of living tissue.

**86.** The method of any of claims 79 to 84, comprising the step of connecting the second end of the conduit of the tissue connector to a second section of said tubular part of living tissue.

**87.** The method of claim 86, wherein the step of connecting the second end of the conduit of the tissue connector to the second section of tubular part of living tissue comprises the steps of inserting the second end of the conduit into the second section of the tubular part of living tissue, including inserting the bulge into the second section of the tubular part of living tissue.

**88.** The method of claim **87** including claim **80**, wherein the step of inserting the second end of the conduit into the second section of the tubular part of living tissue includes, where a second of said at least one flexible sleeve is mounted on the outer surface of the conduit so as to be foldable upon itself, folding the second flexible sleeve upon itself such that at least part of the second section of the tubular part of living tissue is located intermediate the folded second flexible sleeve or intermediate the conduit's outer surface and the flexible sleeve or, where the second flexible sleeve is mounted on the outer surface of the conduit folded or rolled upon itself, unfolding or unrolling the second flexible sleeve such that at least part of the second section of the tubular part of the living tissue is located intermediate the second flexible sleeve and the outer surface of the conduit.

**89.** The method of any of claims **79** to **88**, wherein the human's throat is selected as the tubular part of living tissue.

**90.** The method of any of claims **79** to **88**, wherein the human's trachea is selected as the tubular part of living tissue.

**91.** The method of any of claims **79** to **88**, wherein the human's small bowel is selected as the tubular part of living tissue.

**92.** The method of any of claims **79** to **88**, wherein the human's large bowel is selected as the tubular part of living tissue.

**93.** The method of any of claims **79** to **88**, wherein the human's urethra is selected as the tubular part of living tissue.

**94.** The method of any of claims **79** to **88**, wherein the human's ureter is selected as the tubular part of living tissue.

**95.** The method of any of claims **79** to **88**, wherein the pelvic part of a human's kidney is selected as the tubular part of living tissue.

**96.** The method of any of claims **91** to **95**, wherein the steps of cutting the skin and free-dissecting a location within the patient's body comprise the steps of:

inserting a needle-like tube into the abdomen of a patient's body,  
filling the abdomen with gas thereby expanding the abdominal cavity,  
positioning at least two laparoscopic trocars in the patient's body,  
inserting a camera into the abdomen through one of the trocars,

inserting a dissecting tool through another one of the trocars, and  
dissecting an area of the tubular part of living tissue with the aid of the dissecting tool.

**97.** The method of any of claims **91** to **95**, wherein the step of free-dissecting a location within the patient's body comprises opening the patient's abdomen for open surgery.

**98.** The method of any of claims **79** to **88**, wherein a human's blood vessel is selected as the tubular part of living tissue.

**99.** The method of any of claims **79** to **88**, wherein the human's aorta is selected as the tubular part of living tissue.

**100.** The method of any of claims **79** to **99**, wherein the steps of cutting the skin and free-dissecting a location within the patient's body comprises the steps of:

inserting a needle-like tube into the thorax of a patient's body,  
filling the thorax with gas thereby expanding the thorax cavity,  
positioning at least two laparoscopic trocars in the patient's body,  
inserting a camera into the thorax through one of the trocars,  
inserting a dissecting tool through another one of the trocars, and  
dissecting an area of the tubular part of living tissue with the aid of the dissecting tool.

**101.** The method of any of claims **98** to **99**, wherein the step of free-dissecting a location within the patient's body comprises opening the patient's thorax for open surgery.

**102.** The method of any of claim **79** to **95** or **98**, wherein the steps of cutting the skin, free-dissecting the location adjacent the tubular part of living tissue and connecting the tissue connector to the tubular part of living tissue comprise:

inserting a needle-like tube into the patient's body,  
filling through said needle gas into the patient's body,  
cutting a key-hole,  
inserting at least one laparoscopic trocar through the key-hole towards said location,  
advancing one or more medical instruments and a camera through the at least one trocar towards said location,  
dissecting said location, and  
supplying the tissue connector to said location through the at least one trocar or through a separate incision.

\* \* \* \* \*

专利名称(译)	植入式组织连接器		
公开(公告)号	<a href="#">US20170042542A1</a>	公开(公告)日	2017-02-16
申请号	US15/336958	申请日	2016-10-28
[标]申请(专利权)人(译)	福塞尔PETER		
申请(专利权)人(译)	福塞尔 , PETER		
当前申请(专利权)人(译)	福塞尔 , PETER		
[标]发明人	FORSELL PETER		
发明人	FORSELL, PETER		
IPC分类号	A61B17/11 A61M5/142 A61M27/00 A61B17/34 A61M13/00 A61B17/32 A61M1/10 A61B1/313 A61F2/04 A61F2/06		
CPC分类号	A61B17/11 A61M1/1008 A61M5/142 A61B1/3132 A61B2017/1132 A61M13/003 A61B17/320016 A61M27/002 A61B17/3478 A61B17/1114 A61B2017/1107 A61F2/0077 A61F2/064 A61F2002/045 A61M1/12		
优先权	12/682533 2010-04-09 US PCT/EP2008/008590 2008-10-10 WO 60/960716 2007-10-11 US 60/960766 2007-10-12 US 60/960764 2007-10-12 US 60/960765 2007-10-12 US 60/960767 2007-10-12 US 60/960790 2007-10-15 US 60/960715 2007-10-11 US		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

### 摘要(译)

一种可植入组织连接器包括导管和沿圆周方向从导管的外表面向外延伸的至少一个凸起。至少一个松散地装配在外表面上的阻塞环，在外表面上和阻塞环之间具有间隙，用于将管状活组织安装在间隙内。阻塞环具有相对于凸起的外径尺寸的内径，以防止当活组织安装在间隙内时阻塞环在凸起上滑动。在植入期间，导管被插入活组织的管状部分中并且在凸起上方。然后，阻挡环被推靠在活组织的自由端上靠着凸起。当组织倾向于从导管中拉出时，活组织以自增强效应固定到导管

