



US 20050171467A1

(19) **United States**

(12) **Patent Application Publication** (10) **Pub. No.: US 2005/0171467 A1**
Landman (43) **Pub. Date: Aug. 4, 2005**

(54) **MULTIPLE FUNCTION SURGICAL DEVICE**

(57)

ABSTRACT

(76) Inventor: **Jaime Landman**, St. Louis, MO (US)

Correspondence Address:

Kenneth K. Vu
22872 Avenida Empresa
Rancho Santa Margarita, CA 92688 (US)

(21) Appl. No.: **10/768,608**


(22) Filed: **Jan. 30, 2004**

Publication Classification

(51) **Int. Cl.⁷** **A61M 1/00**; A61M 25/16

(52) **U.S. Cl.** **604/35**; 604/537

A surgical device providing multiple functions including aspiration, irrigation, traction, filtration, dissection and compression of tissue, the surgical device comprising an elongate shaft having a proximal end and a distal end, a mobilization tip operatively attached at the distal end of the elongate shaft for manipulating tissue, and a valve assembly operatively connected to the proximal end of the elongate shaft for selectively delivering and removing an irrigation fluid to and from a surgical site through the elongate shaft. The surgical device is operable with one hand. The surgical device is dimensioned according to its use in either open or minimally invasive surgery. The mobilization tip comprises a traction-enhancing material formed of reticulated foam or from a woven or braided fabric. The mobilization tip further includes a porous filter for preventing biological matters from being inadvertently drawn into the aspiration holes or windows at the distal end of the elongate shaft.

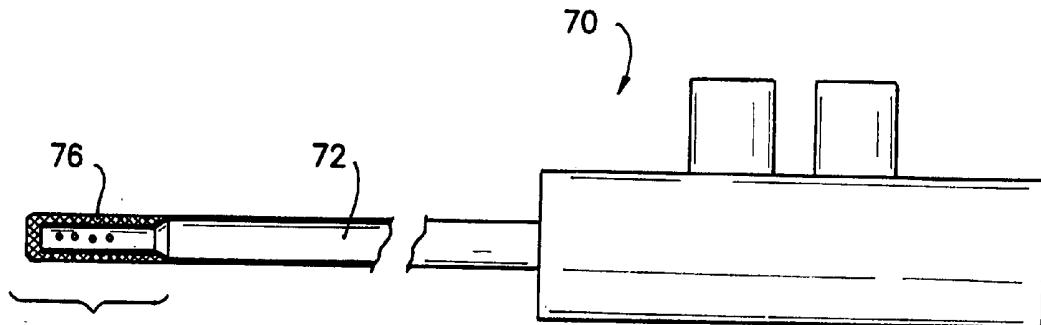

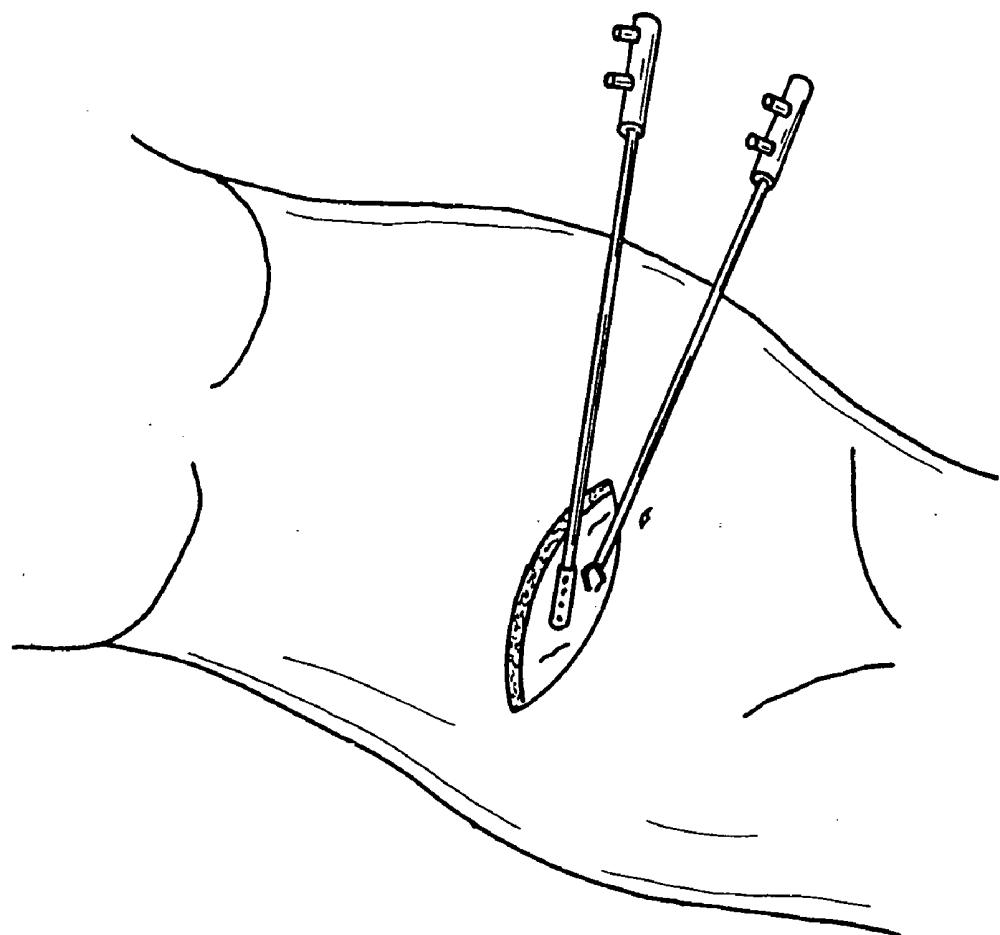


FIG. 1

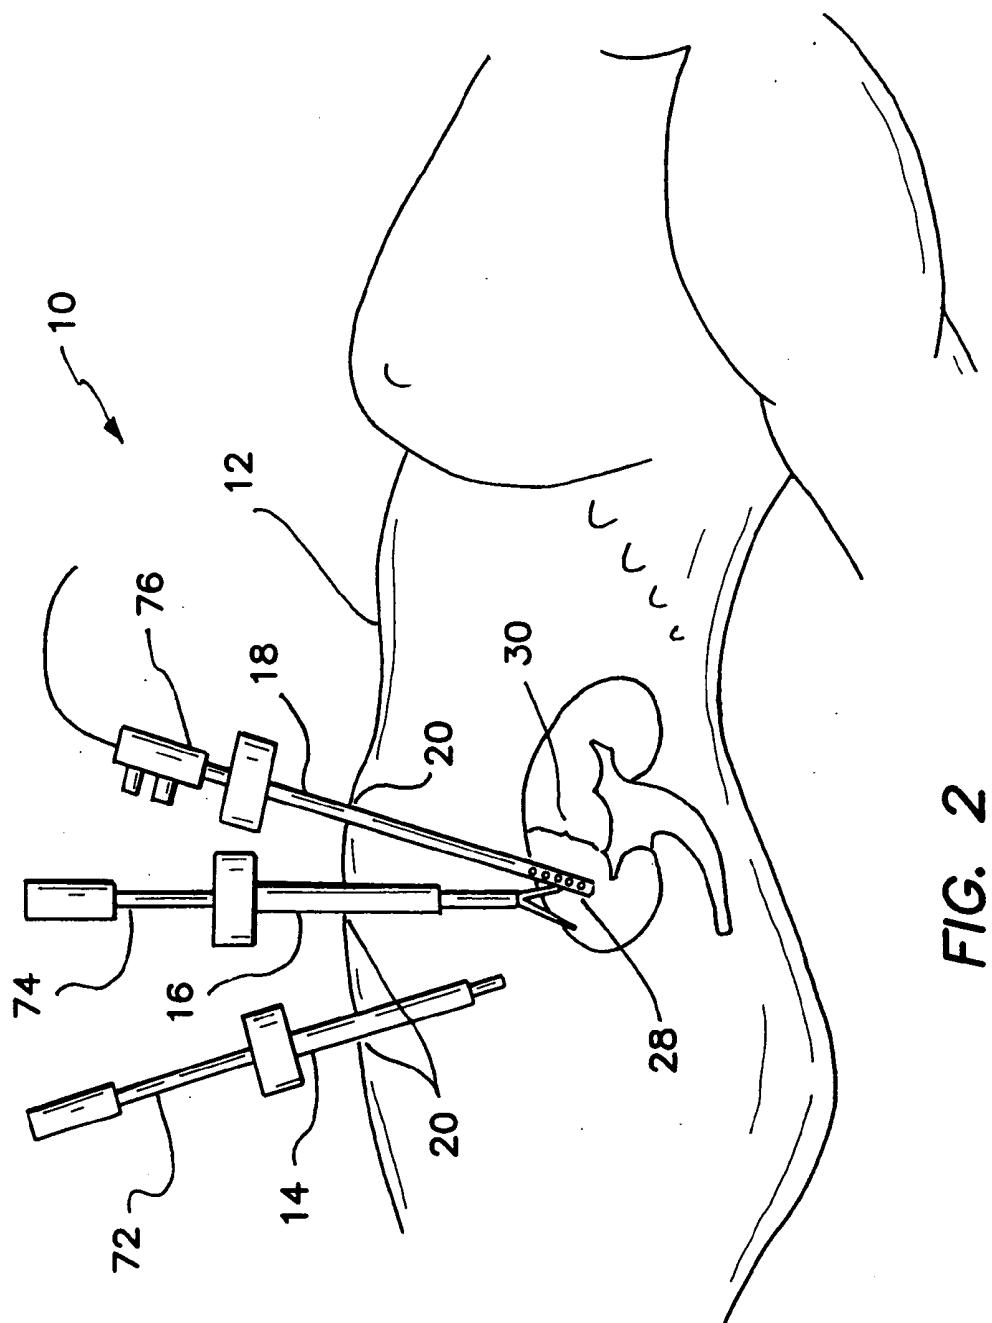
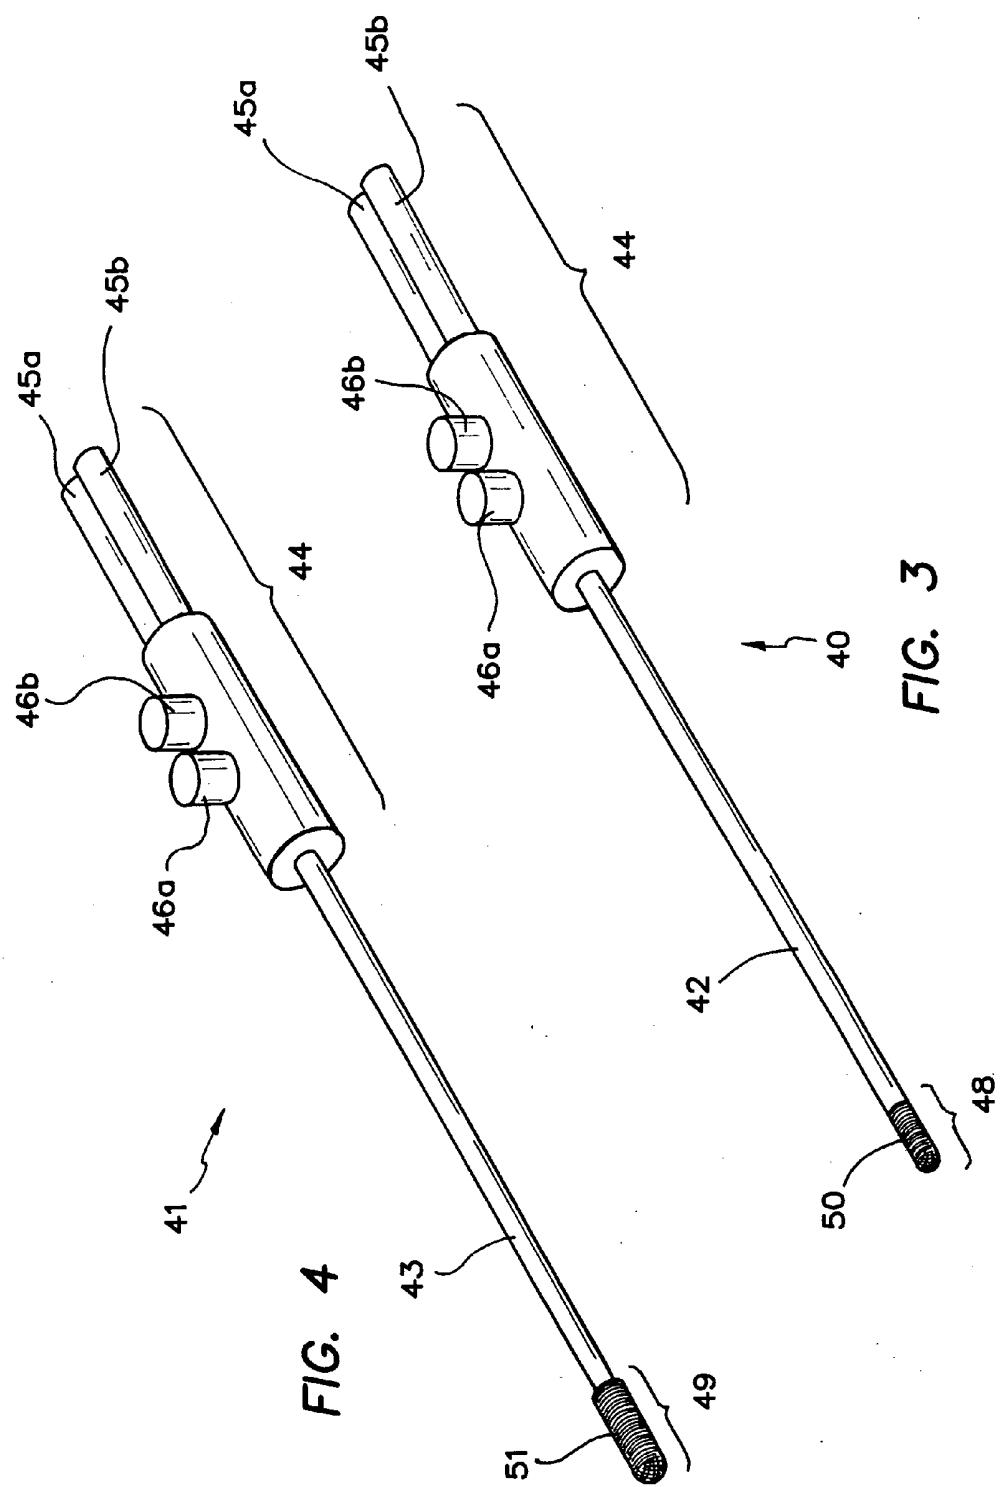
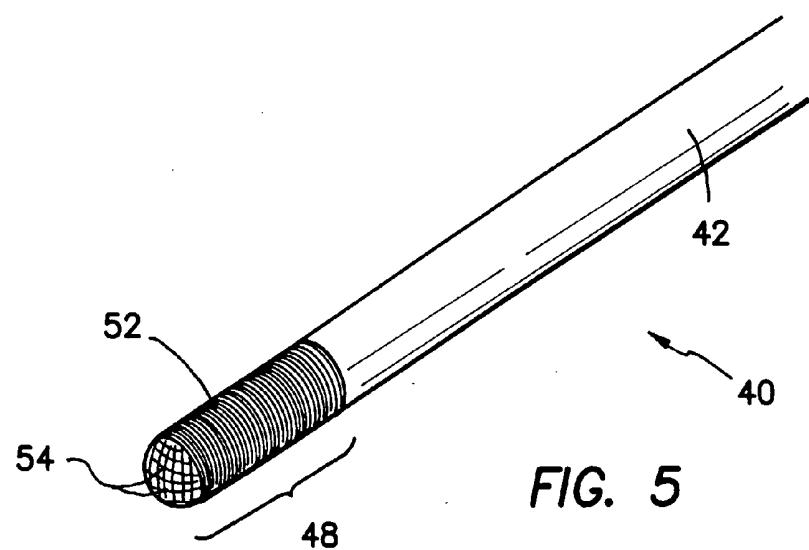
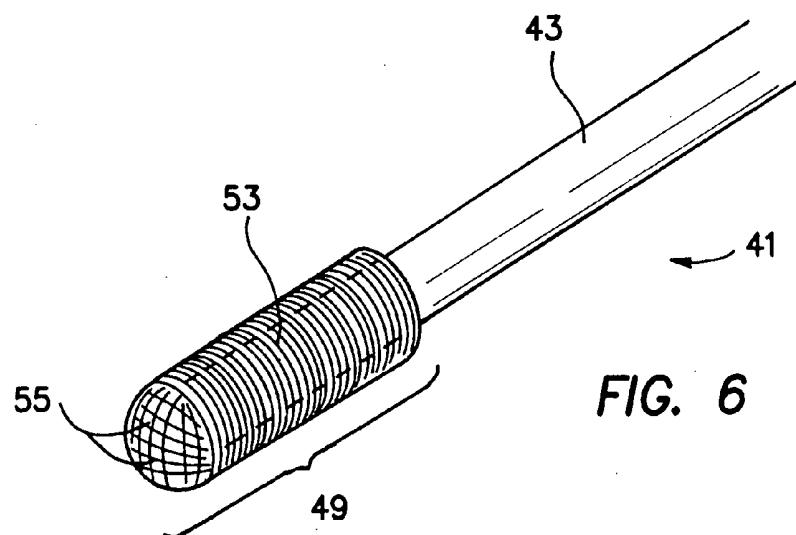


FIG. 2





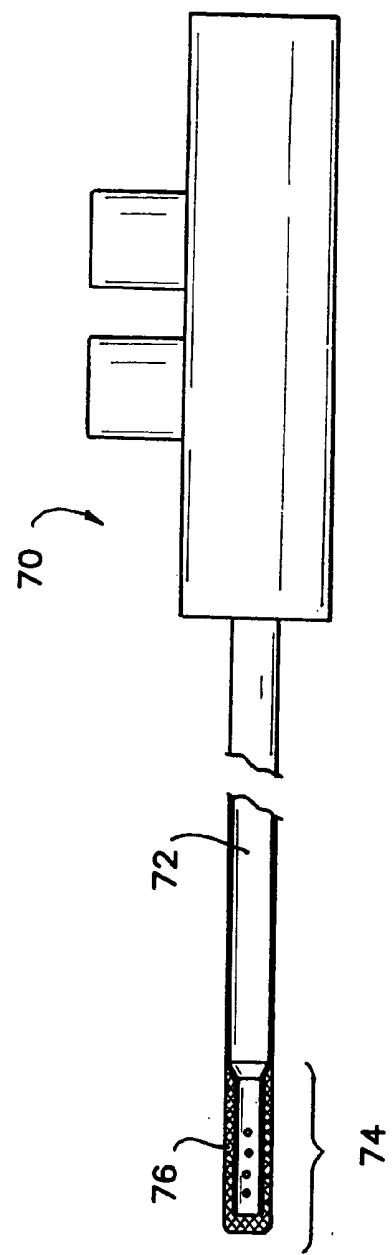


FIG. 7

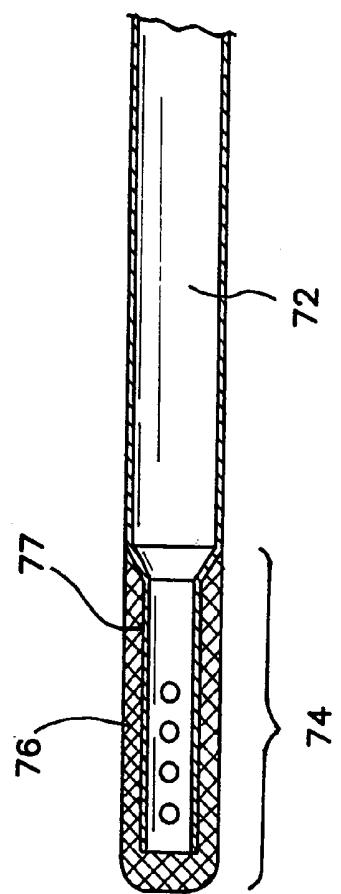


FIG. 8

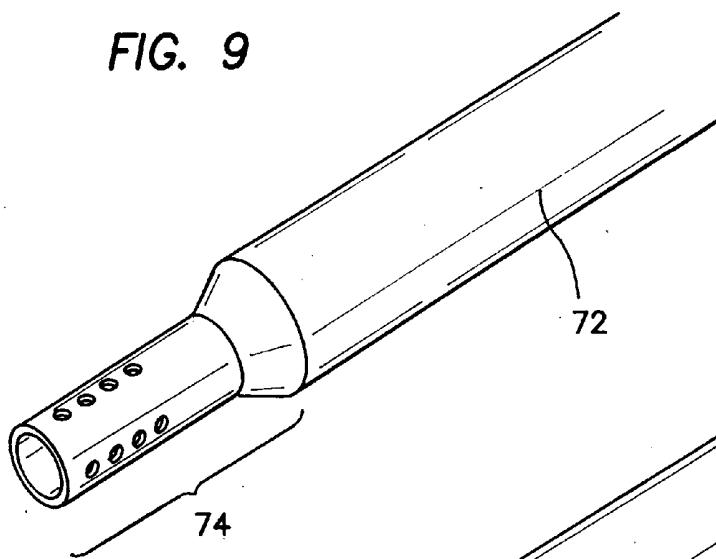
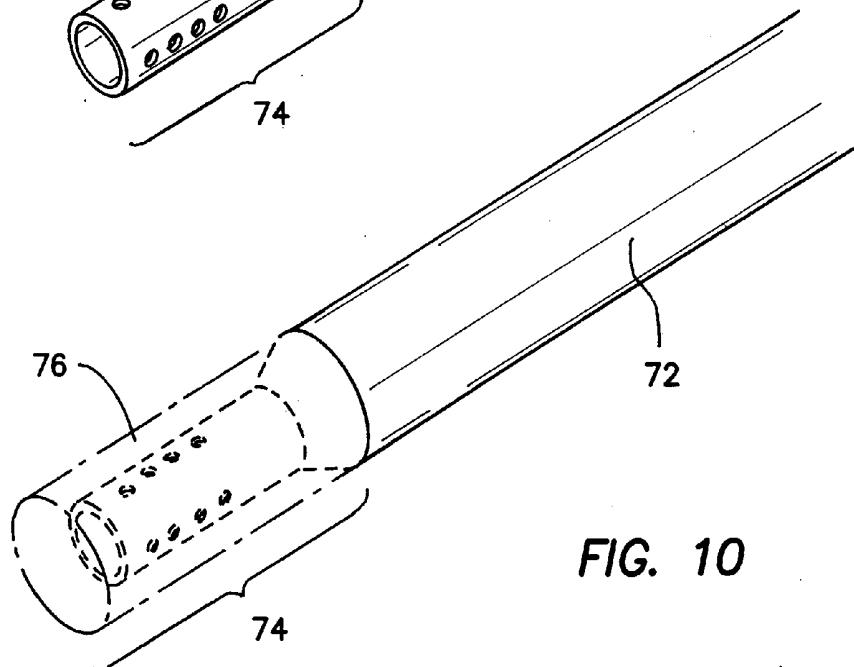
FIG. 9**FIG. 10**

FIG. 11A

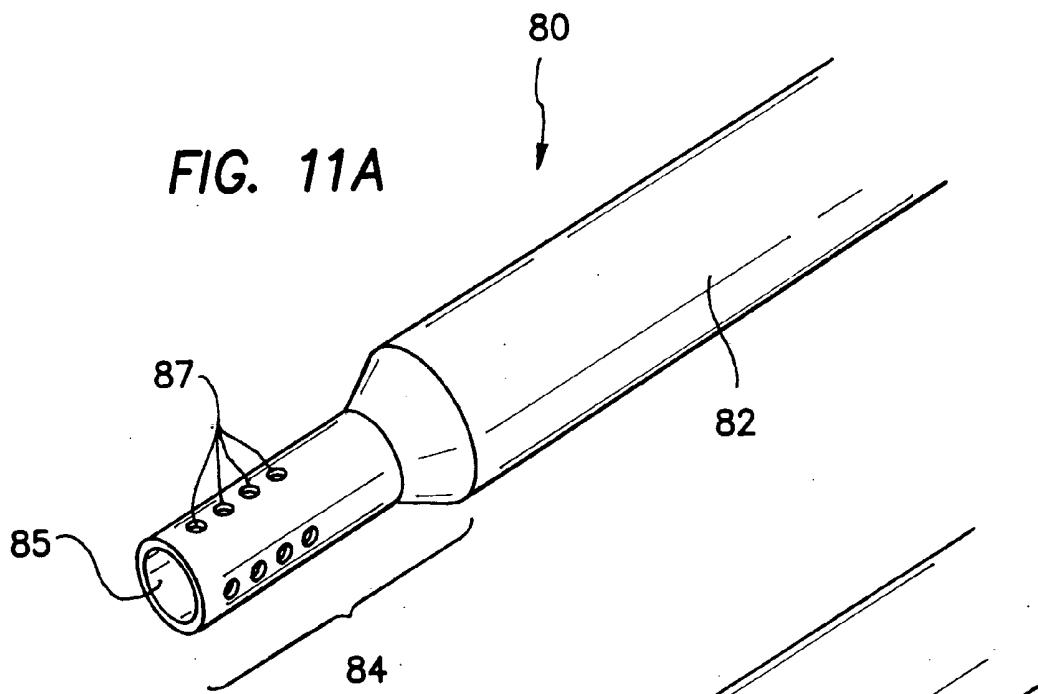


FIG. 11B

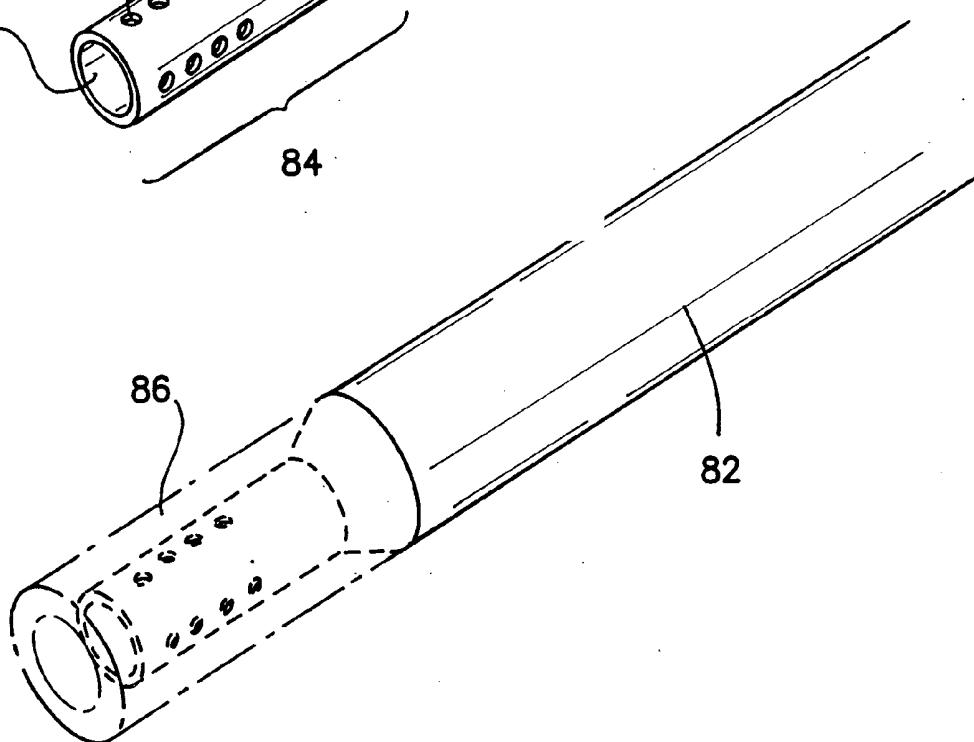


FIG. 12A


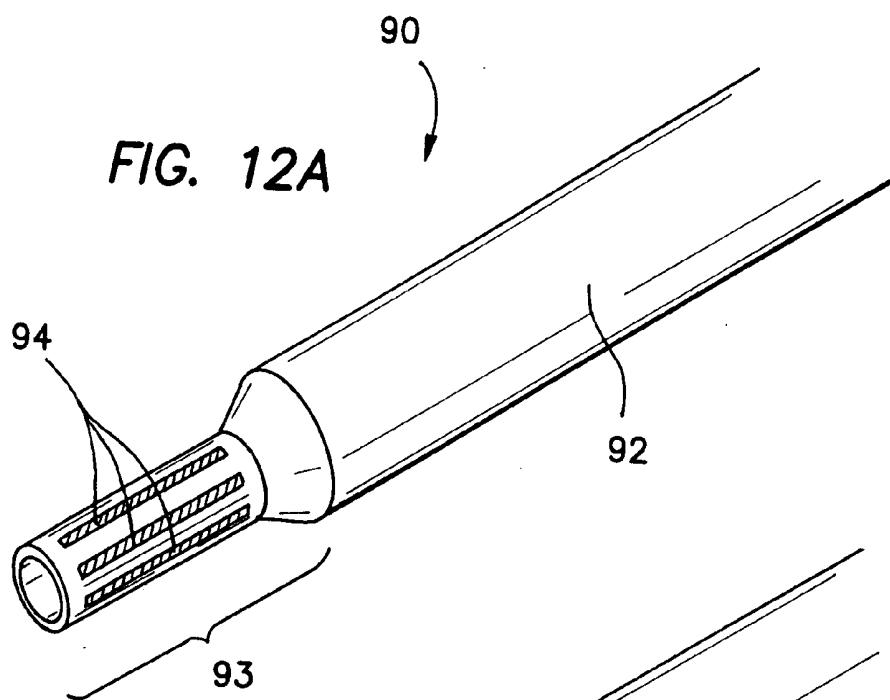


FIG. 12B

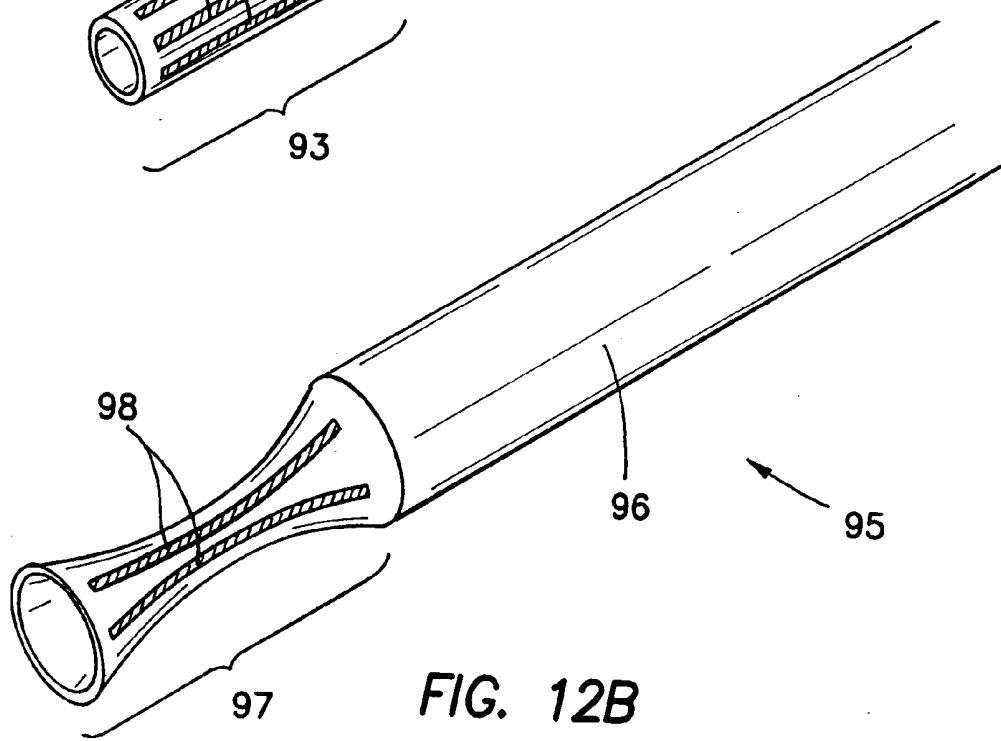

MULTIPLE FUNCTION SURGICAL DEVICE

BACKGROUND OF THE INVENTION

[0001] 1. Field of the Invention

[0002] This invention generally relates to medical devices for use in open and minimally invasive or laparoscopic surgeries and, more particularly, to a surgical device providing multiple functions including aspiration, irrigation, traction, filtration, dissection and compression of tissue.

[0003] 2. Discussion of Related Art

[0004] Surgical devices providing irrigation and aspiration of a surgical site are well known in the art. In particular, suction-irrigation devices are used to clean and clear surgical sites of contamination, blood, biological matter and/or debris during the course of open and minimally invasive surgeries as generally illustrated in **FIGS. 1 and 2**, respectively. In many instances, an irrigation fluid such as saline is introduced to a surgical site and then aspirated or vacuumed from the site. A suction-irrigation device typically includes an elongate tube, sized and configured to operate through a trocar in the case of minimally invasive surgery, and a valve system at the proximal end to alternately deliver and remove the irrigation fluid. The elongate tube is constructed of metal or plastic tubing having an open distal tip and a distal end portion that may include side-holes to allow suction when the distal tip is occluded. The construction of the present suction-irrigation devices is such that it limits the devices to their specific functions. In other words, the construction of the present suction-irrigation devices does not allow them to be used for other purposes or functions.

[0005] With the costs of surgery keep rising, it would be practical to provide surgeons with a device having multiple functions so as to reduce surgery time and costs. For example, it would be advantageous to provide surgeons with an instrument that would allow them to simultaneously dissect and aspirate. In another example, a surgeon may want to mobilize or move a piece of tissue from one location to another location during the course of surgery. This typically requires the use of a suction-irrigation device as discussed above and a mobilization device. The mobilization device generally comprises an elongate shaft with a handle at a proximal end and a mobilization tip or wand having a piece of traction-enhancing material at a distal end. In this instance, the surgeon would need to use both hands simultaneously to manipulate the suction-irrigation device and the mobilization device. Moreover, in the case of minimally invasive surgery, the mobilization device would require a separate trocar to be placed in the patient.

[0006] Accordingly, there is a need in the art for a surgical device that provides multiple functions including at least one of aspiration, irrigation, traction, filtration, dissection and compression of tissue. The ability for a surgical device to provide multiple functions would provide for optimal vascular control during surgery. This multiple function surgical device would not require the simultaneous use of both hands to operate and, in the case of minimally invasive surgery, would need only one trocar port to perform its functions. As a result, the multiple function surgical device reduces surgery time and costs. It is preferable that this surgical device has a distal end portion that is not subject to suction-lock.

SUMMARY OF THE INVENTION

[0007] The present invention is directed to a surgical device capable of providing multiple functions including at least one of aspiration, irrigation, traction, filtration, dissection and compression of tissue. The multiple function surgical device comprises an elongate shaft having a proximal end and a distal end, a mobilization tip operatively attached at the distal end of the elongate shaft for manipulating tissue, and a valve assembly operatively connected to the proximal end of the elongate shaft for selectively delivering and removing an irrigation fluid to and from a surgical site through the elongate shaft. The surgical device may be operated with one hand in an open or minimally invasive surgical procedure. The surgical device is dimensioned according to its use in either open or minimally invasive surgery. The mobilization tip comprises a traction-enhancing material that may be formed of reticulated foam or from a woven or braided fabric. The mobilization tip further includes a porous filter for preventing biological matters such as loose tissues, clots, fats or other debris from being inadvertently drawn into the aspiration holes or spaces at the distal end of the elongate shaft so as to prevent suction-locking or vacuum-locking. The diameter of the elongate shaft may be reduced at the distal end so as to allow different material filter to be attached thereto.

DESCRIPTION OF THE DRAWINGS

[0008] The accompanying drawings, which are included in and constitute a part of this specification, illustrate the embodiments of the invention and, together with the description, explain the features, advantages and principles of the invention. In the drawings:

[0009] **FIG. 1** illustrates a top view of an open surgery requiring at least two instruments;

[0010] **FIG. 2** illustrates a side view of a minimally invasive or laparoscopic surgical setup with multiple trocars;

[0011] **FIG. 3** is a perspective view of a multiple function surgical device having a compressed tip in accordance with a first embodiment of the invention;

[0012] **FIG. 4** is a perspective view of a multiple function surgical device having an expanded tip in accordance with a second embodiment of the invention;

[0013] **FIG. 5** is an enlarged view of the surgical device shown in **FIG. 3** including a traction-enhancing structure;

[0014] **FIG. 6** is an enlarged view of the surgical device shown in **FIG. 4** including a traction-enhancing structure;

[0015] **FIG. 7** is a side section view of a multiple function surgical device having a reduced diameter at its distal end portion in accordance with another embodiment of the invention;

[0016] **FIG. 8** is an enlarged view of the surgical device shown in **FIG. 7**;

[0017] **FIG. 9** is a perspective view of the distal end of the surgical device shown in **FIG. 7** prior to attachment of a traction-enhancing filter;

[0018] **FIG. 10** is a perspective view of the distal end of the surgical device shown in **FIG. 7** after attachment of the traction-enhancing filter;

[0019] **FIG. 11** is a perspective view of the distal end of the surgical device shown in **FIG. 7** attached with an open-end traction-filter in accordance with another embodiment of the invention; and

[0020] **FIG. 12** illustrates perspective views of multiple function surgical devices having distal end portions with reduced diameters and large aspiration holes or spaces in accordance with additional embodiments of the invention.

DETAILED DESCRIPTION OF THE INVENTION

[0021] The following detailed description refers to the accompanying drawings that illustrate the embodiments of the present invention. Other embodiments are possible and modifications may be made to the embodiments without departing from the spirit and scope of the invention. Thus, the following detailed description is not meant to limit the invention. Rather the scope of the invention is defined by the appended claims.

[0022] **FIGS. 1 and 2** illustrate typical open and minimally invasive or laparoscopic surgeries, respectively, requiring the use of multiple instruments. In particular, **FIG. 2** illustrates a side view of a typical minimally invasive or laparoscopic surgical setup **10** in a human body **12**. For this surgery, three trocar ports **14**, **16** and **18** are placed into a body cavity **20** such as the abdominal wall. Trocar port **14** may be used to accommodate a laparoscope **22** to view the surgical site, trocar port **16** may be used to accommodate a grasping or cutting instrument **24**, and trocar port **18** may be used to accommodate a device **26** having a mobilization tip or wand. Mobilization device **26** commonly includes a traction-enhancing member **28** at a distal end portion **30**. Traction-enhancing member **28** includes a traction material such as cotton, which is very absorbent and exhibits an attraction to moist surfaces. With this laparoscopic surgical setup, a surgeon may use one hand to grasp cutting instrument **24** and the other hand to grasp mobilization device **26**. Similarly, during the course of an open surgical procedure as illustrated in **FIG. 1**, a surgeon may use one hand to grasp one instrument and the other hand to grasp another instrument. In general, most surgical procedures require the use of multiple instruments and, as such, it would be advantageous to minimize the number of instruments used during the course of a surgical procedure.

[0023] As can be seen in **FIG. 2**, the laparoscopic procedure makes full use of three strategically placed trocar ports **14**, **16** and **18**. Should another instrument such as a suction-irrigation device is required, mobilization device **26** may be removed and the suction-irrigation device may be placed in trocar port **18**. That is, trocar port **18** may be used to accommodate the suction-irrigation device in place of mobilization device **26**. The suction-irrigation device generally includes an elongate shaft connected to a valve at a proximal end. The elongate shaft is sized and configured to extend through trocar port **18** and into the surgical site. The valve may be connected to a fluid source and a vacuum source and operates to alternately permit the flow and suction of an irrigation fluid through the elongate shaft. The distal end of the elongate shaft is substantially open and may include side-holes. The side-holes are configured to break the suction that may occur when the open distal end is pressed against a soft, compliant, thin or loosely attached tissue.

Specifically, the side-holes are designed to address the problem of vacuum-lock that may occur with common suction devices. For example, when a suction device is placed within a pool of fluid such as blood during a surgical procedure, adjacent tissues may be drawn into the open distal end resulting in a vacuum-lock. This would require the suction function to be terminated and re-started, which is time consuming. This is in addition to the time required to exchange instruments such as the exchange between the mobilization device and the suction-irrigation device. Accordingly, it is particularly useful to have instrumentation in both open and laparoscopic surgical procedures that are configured to provide more than just their traditional functions.

[0024] For example, in laparoscopic surgery, scissors and graspers are commonly connected to an electrosurgical instrument so that they can be used to coagulate severed blood vessels or to cut, electrosurgically, through tough or very vascular structures. This is advantageous since it would not be practical to exchange a mechanical grasper for an electrosurgical probe or to place another trocar into the body to accommodate the occasional use of a single instrument during a laparoscopic procedure.

[0025] **FIG. 3** is a perspective view of a multiple function surgical device **40** in accordance with a first embodiment of the invention. Surgical device **40** provides a novel multi-function instrument for performing open or minimally invasive surgeries. Surgical device **40** includes numerous features necessary for the performance of a surgical procedure such as aspiration, irrigation, traction, filtration, compression and/or dissection of tissue. The ability to perform these multiple functions simultaneously is a novel feature of the invention that is superior to any available technology in open and laparoscopic surgeries. It should be noted that surgical device **40** is dimensioned according to its use in either open or minimally invasive surgery. For example, surgical device **40** should be sized and configured to fit through a trocar port in the case of minimally invasive surgery as generally shown in **FIG. 2**.

[0026] Surgical device **40** includes an elongate shaft **42** and a subassembly **44** having a first connection port **45(a)**, a second connection port **45(b)**, a first valve mechanism **46(a)** and a second valve mechanism **46(b)**. First connection port **45(a)** provides a source of suction, second connection port **45(b)** provides a source of irrigation, first valve mechanism **46(a)** operates to actuate the source of suction through first connection port **45(a)**, and second valve mechanism **46(b)** operates to actuate the source of irrigation through second connection port **45(b)**. First and second valve mechanisms **46(a)** and **46(b)** are preferably on/off switches in the form of trumpet valves which allow the surgeon to selectively choose the suction or irrigation features. Elongate shaft **42** further includes a distal end **48** for providing mobilization and manipulation of organs or tissues. Distal end **48** is substantially open and may include aspiration holes. Distal end **48** further includes a compressed tip and a filter **50** covering the compressed tip to prevent suction-lock when surgical device **40** is in intimate contact with vulnerable tissues. The porous nature of filter **50** prevents biological matters such as delicate or loose tissues from being drawn into the open distal end or aspiration holes of elongate shaft **42**.

[0027] **FIG. 4** is a perspective view of a multiple function surgical device **41** similar to the device **40** shown in **FIG. 3** but includes an expanded distal end or tip **49** and a filter **51** covering said tip **49** in accordance with a second embodiment of the invention. In another embodiment of the invention, **FIG. 5** illustrates an enlarged view of surgical device **40** as shown in **FIG. 3** further including a filter **52** having a traction-enhancing structure **54** attached at distal end **48**. In yet another embodiment of the invention, **FIG. 6** illustrates an enlarged view of surgical device **41** as shown in **FIG. 4** further including a filter **53** having a traction-enhancing structure **55** attached at distal end or tip **49**. It is appreciated that the material used for traction-enhancing structures **54** and **55** would increase the efficiency of the aspiration component of surgical devices **40** and **41**, respectively, as traditional suction-irrigation devices tend to become obstructed with clots, fat and/or other debris. In addition to providing filtration, the softer tips of surgical devices **40** and **41** would also make them superior for compression of bleeding tissues or vessels.

[0028] Traction-enhancing structures **54** and **55** may be formed from cotton or a cotton-like material having absorptive characteristics. Alternatively, traction-enhancing structures **54** and **55** may be formed from a reticulated or an open-cell foam or sponge. Each of traction-enhancing structures **54** and **55** may include a molded, die-cut, woven knitted or braided cover that is removably attached to distal ends or tips **48** and **49**, respectively. With this configuration, the surfaces of traction-enhancing structures **54** and **55** provide a frictional component that mimics the serrations of existing surgical instruments. As illustrated in **FIG. 8**, a braided tubular sleeve **76** may be formed over a reticulated foam sleeve **77**. Braided tubular sleeve **76** provides superior traction while foam sleeve **77** provides atraumatic flexibility and conformity to tissue irregularities or surface features. Braided tubular sleeve **76** is preferably made from a non-elastic fiber and foam sleeve **77** is preferably made from a soft, porous and elastic material. It is appreciated that braided tubular sleeve **76** maintains a tractive surface even when compressed.

[0029] As discussed above, the porous nature of filters **50**, **51**, **52** and **53** prevent delicate or loose tissues from entering into the openings of elongate shafts **42** and **43**. Nevertheless, in the event that tissues are pressed against filters **50**, **51**, **52** and **53**, the suction function of surgical devices **40** and **41** will automatically re-distribute through the porous filters such that devices **40** and **41** will continue to operate without interrupting the surgical procedure. As a result, surgical devices **40** and **41** can provide deep-pool suction without the complications of vacuum-locking of hidden tissues or structures. Filters **50**, **51**, **52** and **53** are preferably made from a porous material that allows irrigation fluid to pass from the distal ends of elongate shafts **42** and **43** to the surgical site.

[0030] **FIG. 7** illustrates a side section view of a multiple function surgical device **70** in accordance with another embodiment of the invention. Surgical device **70** includes an elongate tubular shaft **72** having a reduced diameter at its distal end portion **74**. The reduced diameter allows for the placement of a traction-enhancing filter including braided tubular sleeve **76** and foam sleeve **77** without substantially increasing the diameter of the instrument shaft. For instance, a 5 mm laparoscopic suction-irrigation device is typically sized and configured to fit through a 5 mm laparoscopic trocar. If a distal attachment is placed over the shaft, the increased diameter of the suction-irrigation device may prevent it from entering or exiting the trocar. As such, the

reduced-diameter of distal end portion **74** of elongate shaft **72** allows the traction-enhancing filter to be attached and still fits through a chosen trocar. **FIG. 8** is an enlarged view of surgical device **70** as shown in **FIG. 7**. **FIG. 9** is a perspective view of the distal end of surgical device **70** prior to attachment of the traction-enhancing filter. **FIG. 10** is a perspective view of the distal end of surgical device **70** after attachment of the traction-enhancing filter.

[0031] In another embodiment of the invention, **FIG. 11** illustrates a perspective view of a multiple function surgical device **80** in accordance with another embodiment of the invention. Surgical device **80** is similar to the device **70** shown in **FIGS. 7-10** including an elongate tubular shaft **82** having a reduced diameter at its distal end portion **84**. The distal end **85** of distal end portion **84** is substantially open and may include aspiration holes **87**. The reduced diameter of distal end portion **84** allows for the placement of an open-end traction-enhancing filter **86** without substantially increasing the diameter of the instrument shaft. Open-end traction-enhancing filter **86** is configured such that open distal end **85** remains open after attachment of traction-enhancing filter **86** onto distal end portion **84**. In yet another embodiment of the invention, **FIG. 12** illustrates perspective views of multiple function surgical devices **90** and **95** comprising elongate shafts **92** and **96** having reduced diameters at distal end portions **93** and **97**, respectively. The reduced diameters at distal end portions **93** and **97** allow thicker, more absorptive and more tractive filters to be attached thereto. Moreover, distal end portions **93** and **97** include larger aspiration holes or spaces **94** and **98**, respectively, that provide improved aspiration and irrigation of the surgical site.

[0032] Many alterations and modifications may be made by those having ordinary skill in the art without departing from the spirit and scope of the invention. Therefore, it must be understood that the illustrated embodiments have been set forth only for the purposes of examples and that they should not be taken as limiting the invention.

1. A surgical device comprising:

an elongate shaft defining a lumen and having a proximal end and a distal end;

a mobilization tip operatively attached at the distal end of the elongate shaft for manipulating tissue; and

a valve assembly operatively connected to the proximal end of the elongate shaft for selectively delivering and removing an irrigation fluid to and from a surgical site through the elongate shaft.

2. The surgical device of claim 1, wherein the surgical device is operable with one hand.

3. The surgical device of claim 1, wherein the mobilization tip includes a traction-enhancing material.

4. The surgical device of claim 1, wherein the mobilization tip is formed from a reticulated foam or sponge.

5. The surgical device of claim 1, wherein the mobilization tip is formed from an open-cell foam or sponge.

6. The surgical device of claim 3, wherein the traction-enhancing material includes a molded, die-cut, woven knitted or braided cover that is removably attached to the distal end of the elongate shaft.

7. The surgical device of claim 1, wherein the mobilization tip includes a foam sleeve and a braided tubular sleeve formed over the foam sleeve.

8. The surgical device of claim 7, wherein the foam sleeve is made from a soft, porous and elastic material to provide atraumatic flexibility and conformity to tissue or surface irregularities.

9. The surgical device of claim 7, wherein the braided tubular sleeve is made from a non-elastic fiber.

10. The surgical device of claim 7, wherein the braided tubular sleeve maintains a tractive surface even when compressed.

11. The surgical device of claim 1, wherein the mobilization tip includes a porous material.

12. The surgical device of claim 1, wherein the elongate shaft includes aspiration holes or spaces at the distal end.

13. The surgical device of claim 12, wherein the mobilization tip includes a porous filter for preventing a biological matter from being drawn into the aspiration holes or spaces of the elongate shaft.

14. The surgical device of claim 12, wherein the mobilization tip prevents the surgical device from suction-locking or vacuum-locking.

15. The surgical device of claim 1, wherein the valve assembly includes a first connection port providing a source of suction, a second connection port providing a source of irrigation, a first valve mechanism for actuating the source of suction through the first connection port, and a second valve mechanism for actuating the source of irrigation through the second connection port.

16. The surgical device of claim 15, wherein each of the first and second valve mechanisms comprises an on/off switch allowing an operator to selectively choose the suction or irrigation feature.

17. The surgical device of claim 1, wherein the distal end of the elongate shaft is compressed.

18. The surgical device of claim 1, wherein the distal end of the elongate shaft is expanded.

19. The surgical device of claim 1, wherein the surgical device provides multiple functions including at least one of aspiration, irrigation, traction, filtration, dissection and compression of tissue.

20. The surgical device of claim 19, wherein the multiple functions may be performed simultaneously.

21. The surgical device of claim 1, wherein the surgical device is used in an open surgical procedure.

22. The surgical device of claim 1, wherein the surgical device is used in a minimally invasive or laparoscopic surgical procedure.

23. The surgical device of claim 22, wherein the elongate shaft is sized and configured to extend through a trocar port to the surgical site.

24. The surgical device of claim 1, wherein the surgical device is dimensioned according to its use in either open or minimally invasive surgery.

25. The surgical device of claim 1, wherein the mobilization tip is made from a porous material allowing the irrigation fluid to pass from the distal end of the elongate shaft to the surgical site.

26. A surgical device comprising:

an elongate shaft defining a lumen and having a first diameter at a proximal end and a second diameter less than the first diameter at a distal end portion;

a mobilization tip operatively attached at the distal end portion of the elongate shaft; and

a valve assembly operatively connected to the proximal end of the elongate shaft for selectively delivering and removing an irrigation fluid to and from a surgical site through the elongate shaft,

wherein the mobilization tip has an outer diameter that is substantially the same as the first diameter such that the diameter of the elongate shaft remains substantially the same after attachment of the mobilization tip to the distal end portion.

27. The surgical device of claim 26, wherein the surgical device is operable with one hand.

28. The surgical device of claim 26, wherein the mobilization tip includes a traction-enhancing material.

29. The surgical device of claim 26, wherein the mobilization tip includes an open-end traction-enhancing filter.

30. The surgical device of claim 26, wherein the mobilization tip is formed from a reticulated foam or sponge.

31. The surgical device of claim 26, wherein the mobilization tip is formed from an open-cell foam or sponge.

32. The surgical device of claim 28, wherein the traction-enhancing material includes a molded, die-cut, woven knitted or braided cover that is removably attached to the distal end portion of the elongate shaft.

33. The surgical device of claim 26, wherein the mobilization tip includes a foam sleeve and a braided tubular sleeve formed over the foam sleeve.

34. The surgical device of claim 26, wherein the surgical device is dimensioned according to its use in either open or minimally invasive surgery.

35. A surgical device comprising:

an elongate shaft defining a lumen and having a proximal end and a distal end;

a mobilization tip operatively attached at the distal end of the elongate shaft; and

a valve assembly operatively connected to the proximal end of the elongate shaft for selectively delivering and removing an irrigation fluid to and from a surgical site through the elongate shaft,

wherein the surgical device provides multiple functions including at least one of aspiration, irrigation, traction, filtration, dissection and compression of tissue.

36. The surgical device of claim 35, wherein the surgical device can be used in an open or minimally invasive surgical procedure.

37. The surgical device of claim 35, wherein the surgical device is dimensioned according to its use in either open or minimally invasive surgery.

38. The surgical device of claim 35, wherein the elongate shaft includes aspiration holes or spaces at the distal end.

39. The surgical device of claim 38, wherein the mobilization tip includes a porous filter for preventing a biological matter from being drawn into the aspiration holes or spaces of the elongate shaft.

40. The surgical device of claim 38, wherein the mobilization tip prevents the surgical device from suction-locking or vacuum-locking.

专利名称(译)	多功能手术器械		
公开(公告)号	US20050171467A1	公开(公告)日	2005-08-04
申请号	US10/768608	申请日	2004-01-30
[标]申请(专利权)人(译)	兰德曼JAIME		
申请(专利权)人(译)	兰德曼JAIME		
当前申请(专利权)人(译)	兰德曼, 海梅		
[标]发明人	LANDMAN JAIME		
发明人	LANDMAN, JAIME		
IPC分类号	A61B17/00 A61B17/02 A61B17/32 A61M1/00 A61M25/16		
CPC分类号	A61B17/0218 A61M1/0084 A61B2017/320044		
外部链接	Espacenet USPTO		

摘要(译)

一种手术装置，提供多种功能，包括抽吸，冲洗，牵引，过滤，解剖和压缩组织，该手术装置包括具有近端和远端的细长轴，可操作地连接在细长轴远端的活动尖端用于操纵组织的阀组件和可操作地连接到细长轴的近端的阀组件，用于通过细长轴选择性地将冲洗流体输送到手术部位和从手术部位移除冲洗流体。手术装置可用一只手操作。手术装置的尺寸根据其在开放式或微创手术中的用途。动员尖端包括由网状泡沫或编织或编织织物形成的牵引增强材料。移动尖端还包括多孔过滤器，用于防止生物物质无意中被吸入细长轴的远端处的抽吸孔或窗口中。

