



US 20090043305A1

(19) **United States**(12) **Patent Application Publication**  
**Brodbeck et al.**(10) **Pub. No.: US 2009/0043305 A1**(43) **Pub. Date: Feb. 12, 2009**(54) **SURGICAL INSTRUMENT**(30) **Foreign Application Priority Data**(75) Inventors: **Achim Brodbeck**, Metzingen (DE);  
**Dieter Hafner**, Tübingen (DE)

Aug. 24, 2004 (DE) ..... 10 2004 040 959.5

**Publication Classification**


Correspondence Address:





**DICKSTEIN SHAPIRO LLP****1825 EYE STREET NW****Washington, DC 20006-5403 (US)**(51) **Int. Cl.****A61B 18/14** (2006.01)**A61B 17/32** (2006.01)(52) **U.S. Cl. .... 606/52; 606/167**(73) Assignee: **ERBE ELEKTROMEDIZIN**  
**GMBH**, Tübingen (DE)(57) **ABSTRACT**(21) Appl. No.: **11/573,958**(22) PCT Filed: **Jul. 12, 2005**(86) PCT No.: **PCT/EP05/07559**




§ 371 (c)(1),

(2), (4) Date: **Feb. 20, 2007**

Surgical instruments are provided for performing laparoscopic or similar minimally invasive operations, including two clamping parts, which can move towards one another and which have clamping surfaces for gripping tissue when they are closed. A cutting device has a cutting edge that, in a cutting direction, can be displaced relative to the clamping parts for cutting the gripped tissue. In such an instrument the cutting direction extends at an acute angle to the clamping surfaces when they are closed.

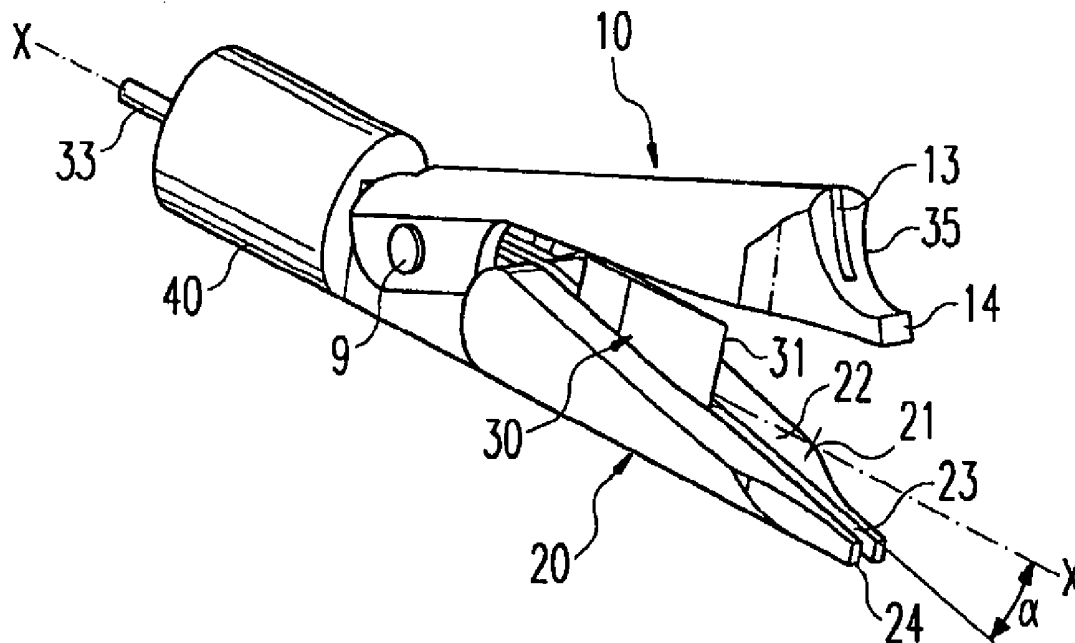

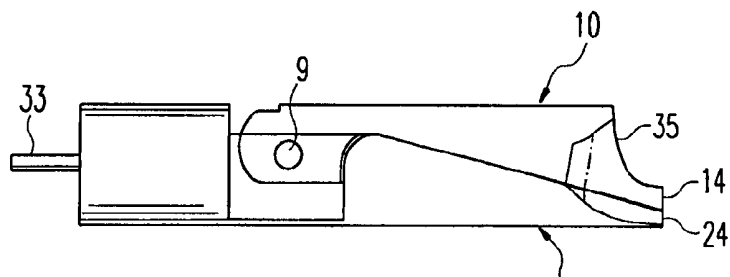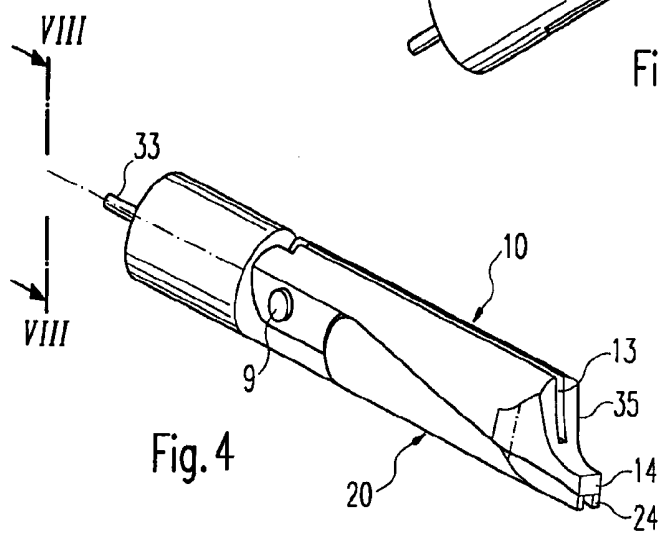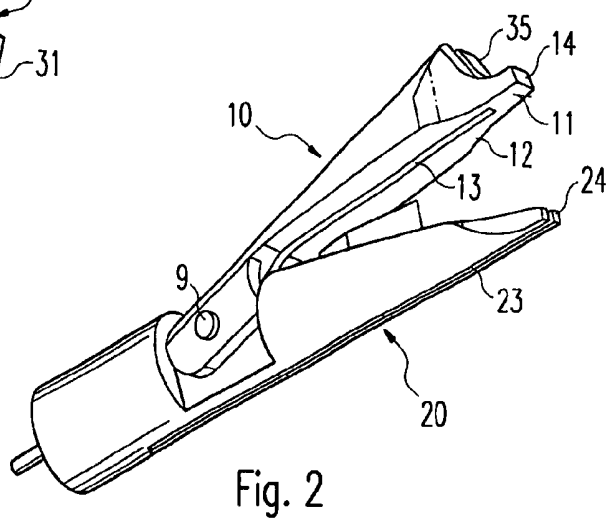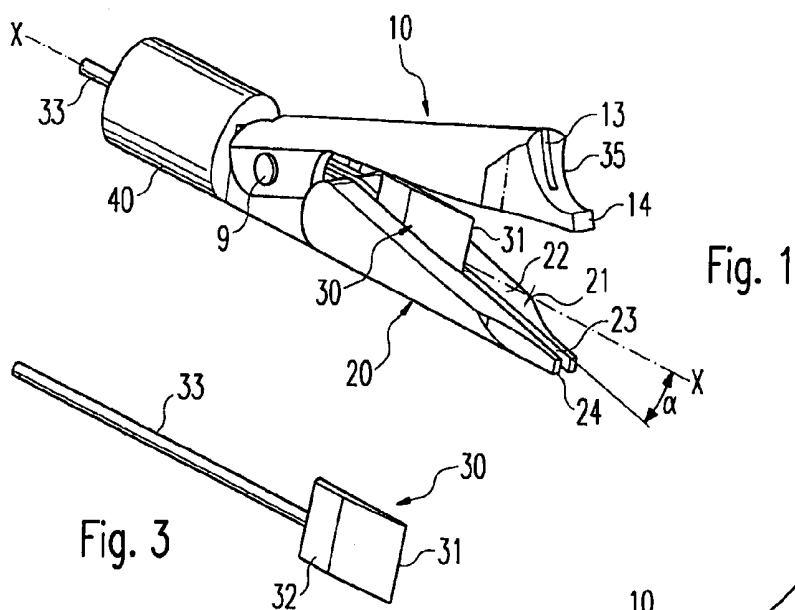

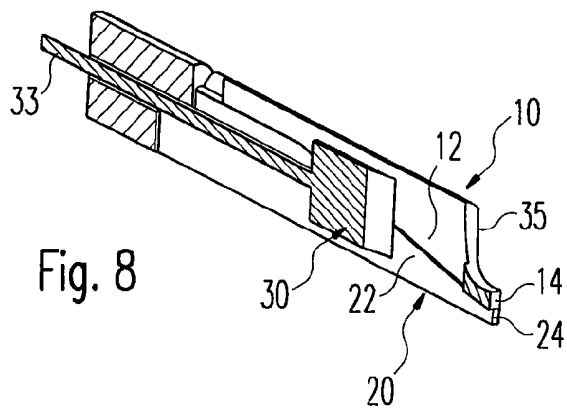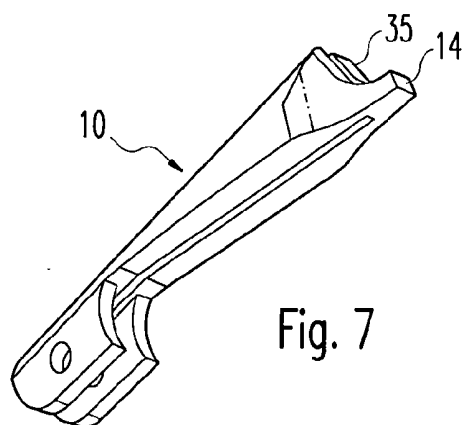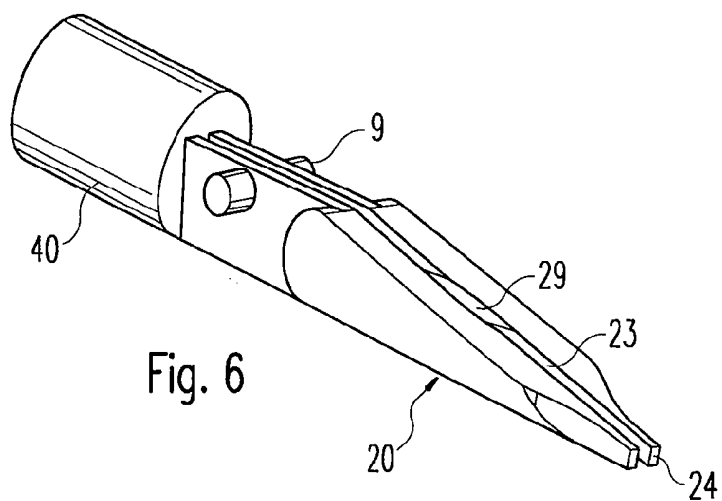

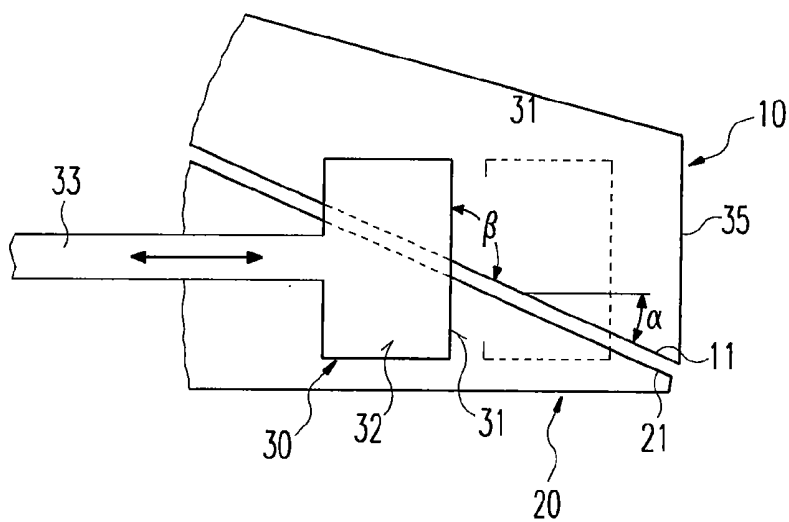


Fig. 9

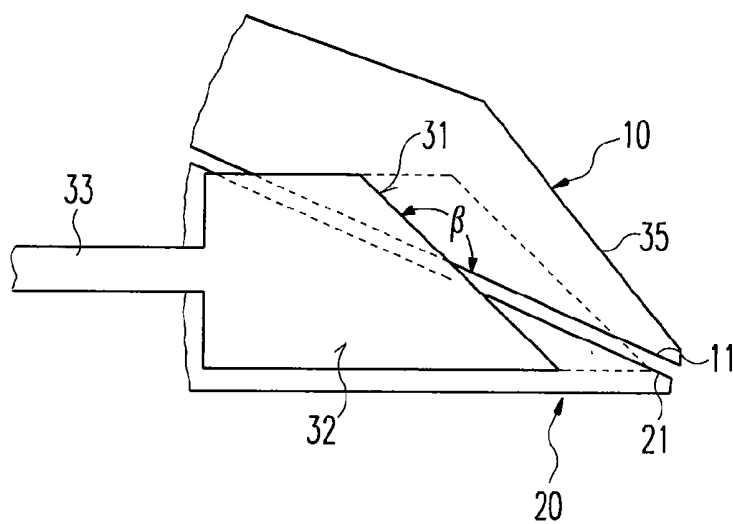


Fig. 10

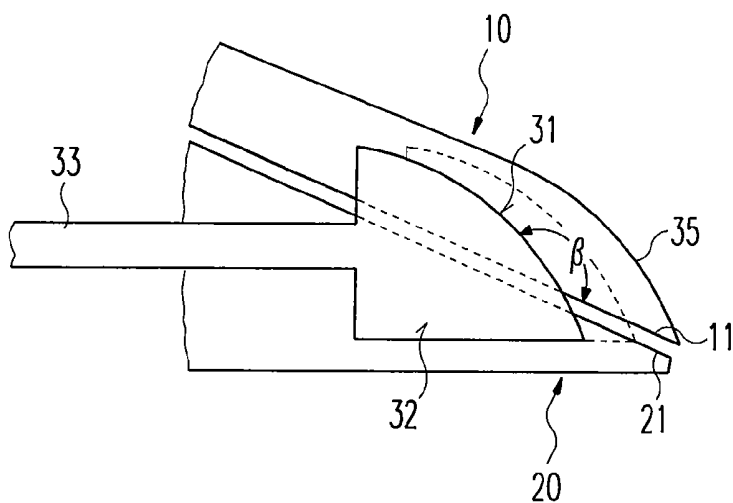


Fig. 11

## SURGICAL INSTRUMENT

### CROSS-REFERENCE TO RELATED APPLICATIONS

[0001] This application is a Section 371 of International Application No. PCT/EP2005/007559, filed on Jul. 12, 2005, which was published in the German language on Mar. 2, 2006, under International Publication No. WO 2006/021269 A1 and the disclosure of which is incorporated herein by reference.

### BACKGROUND OF THE INVENTION

[0002] The invention concerns a surgical instrument with at least two clamping parts and a cutting device for use, in particular, in laparoscopic or similar minimally invasive operations.

[0003] Instruments of this type are used to cut, prepare and coagulate tissue, in particular in minimally invasive surgery, e.g. laparoscopy. A requirement of instruments of this type is that tissue can be safely gripped in a simple manner and then be cut through equally safely. At the same time, it is also important that there is no risk of damaging the surrounding tissue as a result of cutting through the tissue and the cutting movement this requires.

[0004] An instrument of this type, which is configured as a tubular shaft instrument and has electrodes in order to coagulate the gripped tissue, is known from U.S. Pat. No. 5,445, 638.

[0005] The problems with this instrument are considered to be that, on the one hand, there is considerable wear to the cutting instrument while, on the other, the tissue slips relatively easily from the clamping surfaces when being cut through and thus is not cut through completely.

### BRIEF SUMMARY OF THE INVENTION

[0006] The object of the invention is to provide a surgical instrument of the type specified initially that combines an improved cutting action with good and safe operability.

[0007] According to the invention there is provided a surgical instrument, in particular for laparoscopic or similar minimally invasive operations, comprising at least two clamping parts, which can be moved towards each other and which have clamping surfaces for gripping tissue when they are closed, and a cutting device with a cutting edge, which can be moved in a cutting direction relative to the clamping parts to cut gripped tissue, the cutting device extending at an acute angle relative to the clamping surfaces when they are closed.

[0008] In the present invention the clamping surfaces do not hold the tissue—as in the state of the art instruments initially specified—in such a way that the cutting device only exerts forces on the tissue in directions that tend to move the gripped tissue out of the grip of the clamping surfaces. Rather, the angular arrangement ensures that at least parts of the cutting force exerted acts in a direction perpendicular to the clamping surfaces and thus the tissue tends to remain securely in the grip of the clamping surfaces. At the same time, good operability of the instrument is achieved since the instrument can be arranged in such a way that, with opened clamping parts, an advance motion for the grasping of tissue occurs substantially in the direction of an angle bisector between the clamping surfaces, which is of great advantage with laparoscopic operations in particular.

[0009] A further advantage of the instrument according to the invention is that the cutting edge of the cutting device on its path through the opening between the clamping surfaces does not continually meet the same section of the tissue, but rather the cut tissue travels over the cutting edge, with the result that, on the one hand, it is cut rather than pressed and, on the other, the cutting edge is used over a larger longitudinal section and thus is worn less.

[0010] The cutting device may be configured as a HF surgical cutting device or, however, as a mechanical cutting device (like a scalpel).

[0011] Preferably, the cutting edge is inclined at an obtuse angle relative to the cutting direction, which improves the actual cutting action. In addition, the path over which the cutting device must be moved is reduced. This angle of inclination may be constant over the length of the cutting edge relative to the cutting direction or alter with a cutting edge curved like an arc over the latter's length. With such a cutting edge that is curved like an arc, a "soft" first cut may be made, which then becomes a steeper, more forcefully cutting progression of cut.

[0012] Preferably, one of the clamping parts is immovable relative to the cutting direction. As a result, the operator will have a fixed reference point when grasping tissue. In addition, the mechanics for moving the clamping parts are simple.

[0013] Preferably, the surgical instrument is attached at one distal end of a mount to form a tubular shaft instrument for laparoscopic or similar minimally invasive operations. The instrument thus configured handles well. In particular, tissue is easy to grasp and prepare due to the inclination with respect to an axis of the tubular shaft.

[0014] The clamping surface will preferably have, in an essentially conventional manner, electrodes for supplying a HF coagulating current to the tissue, so that tissue grasped by the clamping surfaces can be coagulated and then cut through.

### BRIEF DESCRIPTION OF THE SEVERAL VIEWS OF THE DRAWINGS

[0015] The foregoing summary, as well as the following detailed description of the invention, will be better understood when read in conjunction with the appended drawings. For the purpose of illustrating the invention, there are shown in the drawings embodiments which are presently preferred. It should be understood, however, that the invention is not limited to the precise arrangements and instrumentalities shown.

[0016] In the drawings:

[0017] FIG. 1 is a perspective view of a first embodiment of the invention.

[0018] FIG. 2 is a perspective view of the embodiment shown in FIG. 1 from another angle.

[0019] FIG. 3 is a perspective view of a cutting device.

[0020] FIG. 4 is a perspective view of the embodiment shown in FIG. 1 with its clamping parts closed.

[0021] FIG. 5 is a side elevation of the embodiment shown in FIG. 4.

[0022] FIG. 6 is a perspective view of the embodiment shown in FIG. 2 but with one clamping part removed.

[0023] FIG. 7 is a perspective view of the removed clamping part for attachment to the instrument shown in FIG. 6.

[0024] FIG. 8 is a cross-section along the line VIII-VIII in FIG. 4.

[0025] FIG. 9 is a schematic sectional view showing the angular arrangement of the clamping parts and cutting device.

[0026] FIG. 10 is a view similar to FIG. 9 but of a first modified arrangement with an inclined cutting edge.

[0027] FIG. 11 is a view similar to that shown in FIG. 9 but of a second modified arrangement with an arcuate cutting edge.

#### DETAILED DESCRIPTION OF THE INVENTION

[0028] In the following description, the same reference numerals are used for the same and similarly working parts.

[0029] As shown in FIGS. 1-8, the surgical instrument comprises a first, in the drawings upper, clamping part 10 and a second, in the drawings lower, clamping part 20. Each of the clamping parts 10 and 20 has a clamping surface 11 and 21 respectively, which are fitted in an essentially conventional way with electrodes 12 and 22 respectively. The clamping parts 10 and 20 are connected to each other via an articulated joint 9, wherein the (upper) clamping part 10 has an actuating device, which is familiar in itself and, for the sake of simplicity, has not been depicted in the figures.

[0030] When tissue is clamped between the two clamping surfaces 11 and 21, a HF current may be passed via the electrodes 12, 22 into the tissue for coagulating the same.

[0031] The upper clamping part 10 and the lower clamping part 20 each have a groove 13 and 23 respectively, in which a cutting device 30 with a cutting surface 32 and a front cutting edge 31 can be moved backwards and forwards via a push rod 33. The clamping surfaces 11, 21 have in the closed state (FIG. 4/5) an angle  $\alpha$  (see FIGS. 1, 9) with respect to a longitudinal axis X, in which the cutting device 30 can be moved backwards and forwards via its push rod 33. This acute angle corresponds essentially in the embodiment depicted in FIG. 1-8 to the angle bisector between the two clamping surfaces 11, 21 in their opened state (FIG. 1). The lower clamping part 20 is rigidly attached to a mount 40, which forms part of a tubular shaft instrument, as is generally familiar. As a result of the arrangement thus made, it is possible to move the tubular shaft instrument in its direction of movement along the axis X towards a tissue that is to be gripped and to grasp the same. This direction of movement is particularly favourable for the person operating.

[0032] The point 14 of the upper clamping part and the point 24 of the lower clamping part are each configured to be streamlined, allowing even small sections of tissue to be gripped securely. In the embodiment of the invention depicted in FIGS. 1-8 the cutting device 30 with its cutting edge 31 emerges from the groove 13 of the upper clamping part 10 when the cutting edge 31 has arrived at its foremost (distal) position.

[0033] To achieve protection here against damage to the surrounding tissue, a front edge 35 of the upper clamping part 10 projects so far forward in the embodiment shown in FIG. 9 that the cutting edge 31 is completely protected at the extreme front position of the cutting device 30.

[0034] In the embodiment shown in FIG. 10, the obtuse angle A, at which the cutting edge 31 is inclined relative to the clamping surfaces 11, 21 (in the closed state), is larger than in

the embodiment shown in FIG. 9. As can be seen from comparing FIGS. 9 and 10, the path on which the cutting device 30 must be moved along the axis X to travel from the central position depicted in the figures to the foremost position is smaller than in the embodiment shown in FIG. 9 (reference is made to the dashed line). In addition, the front edge 35 may be chamfered, without the cutting edge 31 in the foremost position of the cutting device 30 emerging from the instrument. The result is a more streamlined configuration.

[0035] The embodiment of the invention depicted in FIG. 11 differs from the one shown in FIG. 10 in that the cutting edge 31 is not constructed to be evenly inclined but rather arched. As a result, the upper clamping part 10 may be configured to be even more streamlined, on the one hand, while, on the other, a "softer" first cut is achieved when the cutting device 32 is displaced from its retracted position (the position shown on the left in the figures) into its advanced position and thus the angle between a section of clamped tissue is at first level, almost parallel to the clamping surfaces 11, 21, and then varies in relation to these, becoming increasingly steeper.

[0036] In addition, it is also possible to configure the clamping surfaces 11, 21 not only rectilinearly but also curving, which is particularly advantageous for many preparation purposes.

[0037] It will be appreciated by those skilled in the art that changes could be made to the embodiments described above without departing from the broad inventive concept thereof. It is understood, therefore, that this invention is not limited to the particular embodiments disclosed, but it is intended to cover modifications within the spirit and scope of the present invention as defined by the appended claims.

1.-6. (canceled)

7. Surgical instrument, comprising

at least two clamping parts, which can move towards each other and which have clamping surfaces for gripping tissue when the clamping parts are closed, and

a cutting device with a cutting edge, which can move in a cutting direction relative to the clamping parts to cut the gripped tissue,

the cutting device extending at an acute angle relative to the clamping surfaces when they are closed.

8. Surgical instrument according to claim 7, wherein said cutting edge is inclined at an obtuse angle relative to the cutting direction.

9. Surgical instrument according to claim 7, wherein said cutting edge has an arced configuration.

10. Surgical instrument according to claim 7, wherein one of said clamping parts is fixed relative to the cutting direction.

11. Surgical instrument according to claim 7, which is adapted to be attached at a distal end of a mount and to form a tubular shaft instrument for use in minimally invasive operations.

12. Surgical instrument according to claim 7, wherein said clamping surfaces comprise electrodes adapted to supply a HF coagulating current to the tissue.

\* \* \* \* \*

专利名称(译)	手术器械		
公开(公告)号	<a href="#">US20090043305A1</a>	公开(公告)日	2009-02-12
申请号	US11/573958	申请日	2005-07-12
[标]申请(专利权)人(译)	厄比电子医学有限责任公司		
申请(专利权)人(译)	ERBE ELEKTROMEDIZIN GMBH		
当前申请(专利权)人(译)	ERBE ELEKTROMEDIZIN GMBH		
[标]发明人	BRODBECK ACHIM HAFNER DIETER		
发明人	BRODBECK, ACHIM HAFNER, DIETER		
IPC分类号	A61B18/14 A61B17/32		
CPC分类号	A61B18/1445 A61B2018/1455 A61B2018/1412		
优先权	102004040959 2004-08-24 DE		
其他公开文献	US8992526		
外部链接	<a href="#">Espacenet</a> <a href="#">USPTO</a>		

#### 摘要(译)

提供用于执行腹腔镜或类似微创手术的手术器械，包括两个夹紧部件，这两个夹紧部件可以朝向彼此移动并且具有夹紧表面，用于在组织闭合时夹紧组织。切割装置具有切割边缘，该切割边缘在切割方向上可相对于夹持部件移位，以切割被夹持的组织。在这种仪器中，切割方向在它们闭合时与夹紧表面成锐角延伸。

