



(12) **EUROPEAN PATENT APPLICATION**

(43) Date of publication:
01.04.2015 Bulletin 2015/14

(51) Int Cl.:
A61B 17/32 ^(2006.01) **A61B 17/00** ^(2006.01)

(21) Application number: **14184055.3**

(22) Date of filing: **09.09.2014**

(84) Designated Contracting States:
**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**
Designated Extension States:
BA ME

(30) Priority: **25.09.2013 US 201361882035 P**
21.08.2014 US 201414464832

(71) Applicant: **Covidien LP**
Mansfield, MA 02048 (US)

(72) Inventors:
• **Van Tol, David J.**
Boulder, Colorado 80301 (US)
• **Ross, Anthony B.**
Boulder, Colorado 80301 (US)
• **Stoddard, Robert B.**
Steamboat Springs, Colorado 80477 (US)

(74) Representative: **Hoffmann Eitle**
Patent- und Rechtsanwälte PartmbB
Arabellastraße 30
81925 München (DE)

(54) **Ultrasonic dissector and sealer**

(57) A tool assembly includes an ultrasonic blade and a jaw member. The ultrasonic blade includes a proximal portion and a distal portion. The distal portion extends from the proximal portion and defines a longitudinal axis. The distal portion is configured to oscillate along the longitudinal axis to ultrasonically treat tissue. The distal portion includes a top portion, a bottom portion, a notch, and

planar side segments. The notch is disposed on the bottom portion. One of the top portion, the bottom portion, or the notch is configured to dissect tissue. The top portion is configured to seal tissue. The jaw member is configured to move relative to the ultrasonic blade and is configured to contact the top portion.

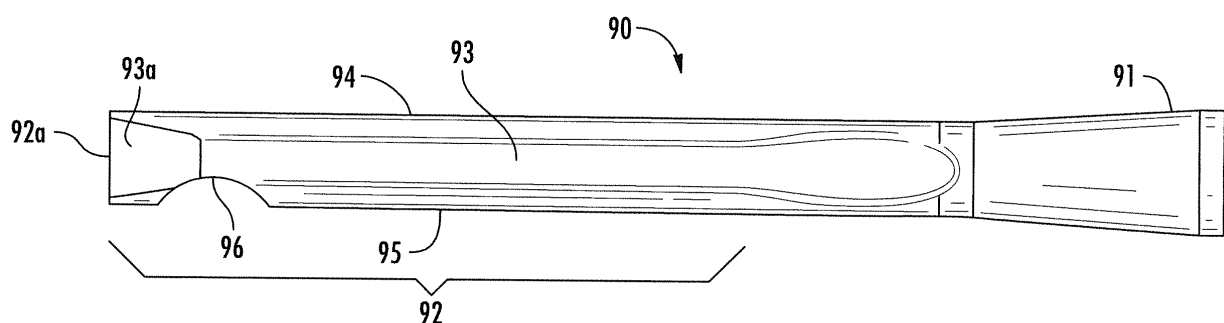


FIG. 5A

Description

Background

1. *Technical Field*

[0001] The present disclosure relates to surgical instruments and, more specifically, to ultrasonic surgical instruments having features for dissecting and sealing tissue.

2. *Discussion of Related Art*

[0002] Energy-based tissue treatment is well known in the art. Various types of energy (e.g., electrical, ultrasonic, microwave, cryogenic, thermal, laser, etc.) are applied to tissue to achieve a desired result. Ultrasonic energy may be delivered to tissue using a surgical probe that includes a transducer coupled with an end effector configured to deliver the ultrasonic energy to tissue.

[0003] A typical ultrasonic surgical instrument generates a sinusoidal driving signal that causes the mechanical tip of a waveguide to vibrate at a selected frequency, usually from about 20 KHz to about 60 KHz, for cutting and/or coagulating tissue. Improved cutting may result from increased tissue-to-mechanical tip contact caused by the high frequency of vibration of the mechanical tip in relation to tissue. Improved coagulation may result from heat generated by contact between the high frequency vibrations of the mechanical tip and body tissue.

[0004] Ultrasonic surgical instruments may include various waveguides configured to achieve a surgical result. An ultrasonic waveguide may be disposed at a distal end of the ultrasonic instrument. The waveguide may include an end effector having a cutting blade, shears, a hook, a ball, etc., and may also include other features such as jaws for grasping or manipulating tissue.

Summary

[0005] In an aspect of the present disclosure, an ultrasonic surgical instrument includes a handle assembly, an elongated body, and a tool assembly. The elongated body extends distally from the handle assembly and defines a longitudinal axis. The elongated body includes a waveguide. The tool assembly includes a blade coupled to a distal end of the waveguide and a jaw member pivotally movable relative to the blade. The blade is configured to oscillate along the longitudinal axis. The blade may be an ultrasonic blade configured to ultrasonically treat tissue. The blade includes a proximal portion and a distal portion. The distal portion extends from the proximal portion and includes a top portion, a bottom portion, and planar side segments. The top portion is configured to seal tissue. The bottom portion includes a notch disposed on a surface thereof. The planar side segments extend between the top and bottom portion. One of the top portion, the bottom portion, or the notch is configured

to dissect tissue.

[0006] In aspects of the present disclosure, the distal portion of the blade includes a planar distal tip.

5 [0007] In aspects of the present disclosure, the distal portion of the blade includes a pointed distal tip.

[0008] In aspects of the present disclosure, the notch is arcuate. The notch may include a vertical surface. The notch may include an arcuate surface.

10 [0009] In aspects of the present disclosure, the bottom portion of the ultrasonic blade includes converging planar surfaces.

[0010] In aspects, the notch is located distally along the distal portion of the blade.

15 [0011] In aspects, the blade includes tapered segments tapering down between the side segments and a distal tip of the blade.

[0012] In aspects, the proximal portion is generally conical and tapers down to the distal portion.

20 [0013] In aspects, the distal portion includes an arcuate top portion and/or an arcuate bottom portion.

[0014] In some embodiments, the top and bottom portions have a common center of curvature.

25 [0015] In aspects, the top portion is configured to conform to a surface of clamp member contacting the top portion.

30 [0016] In other aspects of the present disclosure, a method for ultrasonically treating tissue includes accessing a surgical site with an ultrasonic surgical instrument, dissecting tissue with a first portion of a blade, and sealing tissue with a second portion of the blade different that is different from the first portion of the blade. The instrument includes the blade that defines a longitudinal axis. The first portion may be a bottom portion of the blade. The second portion may be one of a top portion or planar side segments. Sealing the tissue may include clamping tissue between a top portion and a jaw pivotally movable relative to the blade.

35 [0017] Further, to the extent consistent, any of the aspects described herein may be used in conjunction with any or all of the other aspects described herein.

Brief Description of the Drawings

40 [0018] Various aspects of the present disclosure are described herein below with reference to the drawings, wherein:

FIG. 1 is a perspective view of one illustrative embodiment of a surgical instrument provided in accordance with the present disclosure;

FIG. 2 is an exploded view of components of an elongated body portion of the surgical instrument of FIG. 1 in accordance with the present disclosure;

FIG. 3 is an enlarged view of a tool assembly of the surgical instrument of FIG. 1 with a portion of an outer tube of the elongated body portion of FIG. 2 cut away in accordance with the present disclosure;

FIG. 4 is an enlarged view of the distal end of the

tool assembly of FIG. 3 in the closed position in accordance with the present disclosure; FIGS. 5A-G are side views of various embodiments of a blade of the surgical instrument of FIG. 1 in accordance with the present disclosure; and FIGS. 6A-G are front views of the blades of FIGS. 5A-G, respectively, in accordance with the present disclosure.

Detailed Description

[0019] Embodiments of the present disclosure are now described in detail with reference to the drawings in which like reference numerals designate identical or corresponding elements in each of the several views. As used herein, the term "clinician" refers to a doctor, a nurse, or any other care provider and may include support personnel. Throughout this description, the term "proximal" refers to the portion of the device or component thereof that is closer to the clinician and the term "distal" refers to the portion of the device or component thereof that is further from the clinician.

[0020] Referring now to FIG. 1, an ultrasonic surgical instrument 10 configured for use in accordance with the present disclosure is shown. Ultrasonic surgical instrument 10 generally includes a handle assembly 12, an elongated body portion 14, and a tool assembly 16. Handle assembly 12 supports a battery assembly 18 and an ultrasonic transducer and generator assembly (hereinafter "TAG") 20. Handle assembly 12 includes a rotatable nozzle 22, an activation button 24, and a clamp trigger 26. Battery assembly 18 and TAG 20 are each releasably secured to a central body 28 of handle assembly 12 and are removable from central body 28 to facilitate disposal of the entire device, with the exception of battery assembly 18 and TAG 20.

[0021] With additional reference to FIG. 2, elongated body portion 14 includes a waveguide 30 that extends from handle assembly 12 and couples tool assembly 16 (FIG. 1) thereto. A distal end of waveguide 30 defines a blade 90, which is described in further detail below. A proximal end of waveguide 30 has a threaded extension 34 for engaging TAG 20. Waveguide 30 further includes a proximal tapered portion 30a and distal tapered portions 30b and 30c. A series of annular abutments 31a-d are disposed along, e.g., machined onto, waveguide 30 at node points along waveguide 30.

[0022] An inner tube 36 is positioned about waveguide 30 between proximal tapered portion 30a and distal tapered portion 30b of waveguide 30. A distal seal member 38 is supported about waveguide 30 distally of a distal end of inner tube 36 and proximally of distal tapered portion 30c of waveguide 30 to provide a fluid-tight seal at the distal end of elongated body portion 14 between waveguide 30 and an inner surface of a middle tube 42. Ultrasonic energy is isolated from transfer to middle tube 42 by inner tube 36. A series of splines 44 are formed at the proximal end of waveguide 30. Splines 44 engage

corresponding splines (not shown) formed on an inner surface of a torque adapter 46 to rotatably secure torque adapter 46 to waveguide 30. Torque adapter 46 also includes diametrically opposed wings 48 that are positioned in recesses (not shown) in rotatable nozzle 22 to secure torque adapter 46 to rotatable nozzle 22.

[0023] With additional reference to FIGS. 3 and 4, middle tube 42 is positioned about inner tube 36 (FIG. 2) and includes a distal end having a corset feature 50 and a pair of spaced clamp support arms 52. Corset feature 50 is positioned to receive distal seal member 38 and to maintain distal seal member 38 in the proper position about the distal end of waveguide 30. Distal seal member 38 is positioned at a node point along waveguide 30. An O-ring 40 is supported about corset feature 50 to provide a fluid-tight seal between an outer surface of middle tube 42 and an inner surface of an outer tube 66.

[0024] With reference to FIGS. 2-4, spaced clamp support arms 52 each define an opening 54 for pivotally receiving pivot members 56 formed on a clamp member 58 of tool assembly 16. Clamp member 58 of tool assembly 16 is pivotal between an open position (FIG. 3), wherein clamp member 58 is spaced from blade member 90, and a closed position (FIG. 4), wherein clamp member 58 is in juxtaposed alignment with blade member 90. Clamp member 58 is moved between the open position and the closed position in response to actuation of clamp trigger 26 (FIG. 1).

[0025] Referring again to FIG. 2, outer tube 66 is slidably repositionable between an advanced position and a retracted position. Upon movement of outer tube 66 from the advanced position to the retracted position, clamp member 58 is moved from the open position (FIG. 3) to the closed position (FIG. 4). A proximal end of outer tube 66 includes an elongated slot 70 (FIG. 2) which receives projections (not shown) of rotatable nozzle 22 (FIG. 1) such that outer tube 66 is rotatably secured to, but slidable about, the projections to facilitate movement of outer tube 66 between the advanced and retracted positions.

[0026] The proximal end of outer tube 66 includes a bifurcated portion that defines an axially extending throughbore 72 that slidably receives wings 48 of torque adapter 46. A pair of diametrically opposed windows 74 are formed in the proximal end of outer tube 66. Windows 74 receive bosses (not shown) formed in handle assembly 12 (FIG. 1) to couple outer tube 66 to handle assembly 12 (FIG. 1).

[0027] With reference to FIGS. 5A and 6A, blade 90 defines a longitudinal axis and includes a proximal portion 91 and a distal portion 92. Proximal portion 91 is configured to couple to waveguide 30. In embodiments, proximal portion 91 may be generally conical and may taper down to distal portion 92. Distal portion 92 includes a planar distal tip 92a, planar side segments 93, an arcuate top portion 94, an arcuate bottom portion 95, and a notch 96. Side segments 93 are substantially flat parallel to the longitudinal axis of blade 90. Side segments

93 include flat tapered segments 93a near distal tip 92a such that tapered segments 93a form a flat surface at distal tip 92a. Side segments 93 and/or tapered segments 93a may be configured to score or seal tissue as described in detail below. In embodiments, top portion 94 and bottom portion 95 may be generally arcuate. In some embodiments, top and bottom portions may have a common center of curvature. Notch 96 is disposed on bottom portion 95 and is configured to cut or dissect tissue as described in detail below. Notch 96 has a generally arcuate shape as shown in FIG. 5A. Top portion 94 contacts clamp member 58 when clamp member 58 is in the closed position. In some embodiments, top portion 94 may be configured to conform to the surface of clamp member 58.

[0028] In use, blade 90 may be used to dissect and seal tissue. During operation, TAG 20 is activated to ultrasonically translate or oscillate blade 90 along the longitudinal axis. As blade 90 oscillates, the temperature of blade 90 increases. When the temperature of blade 90 reaches a desired temperature, distal portion 92 of blade 90 may be used to dissect and/or seal tissue. The cutting properties of distal portion 92 are improved as the temperature of distal portion 92 increases. It is envisioned that any portion of distal portion 92 may be used to dissect tissue. In embodiments, notch 96 of distal portion 92 may be used to improve cutting properties of distal portion 92. Notch 92 may increase tissue contact or tissue tension during a cutting or back scoring motion to improve the cutting properties of bottom portion 95. In some embodiments, clamp member 58 may be used to increase the tension in tissue clamped between clamp member 58 and top portion 94 of blade 90.

[0029] When the temperature of blade 90 is increased, as described above, planar surfaces, e.g., side segments 93 of distal portion 92 of blade 90 may also be used to score or seal tissue. In embodiments, side segments 93 may seal tissue when the temperature of distal portion 92 is at or above 250° C. However, it is also envisioned that side segments 93 may seal tissue at temperatures below 250° C by applying additional pressure to the tissue to be sealed against side segments 93, e.g., it has been shown that tissue may be sealed at a temperature as low as 90° C. Top portion 94 of blade 90 may be used to seal tissue. Clamp member 58 may apply additional pressure to the tissue to be sealed against top portion 94.

[0030] The ultrasonic motion of blade 90 results in decreasing internal stress from the proximal portion 91 to distal tip 92a. Thus, location of notch 96 is based on reducing physical strain and/or stress on the blade 90. In embodiments, if notch 96 is disposed too proximally, the reduction in the cross-sectional area as well as the stress concentration of notch 96 may result in excessive stress causing fracture of blade 90.

[0031] Referring to FIGS. 5B and 6B, another exemplary embodiment of a distal portion 192 in accordance with the present disclosure is shown. Distal portion 192 includes a planar distal tip 192a, planar side segments

193, a planar top portion 194, a planar bottom portion 195, and a triangular notch 196 disposed on bottom portion 195. Distal portion 192 is similar to distal portion 92 described above, as such only the differences are described in detail below for reasons of brevity. Bottom portion 195 has a stepped configuration as shown in FIG. 6B such that the bottom planar surface of bottom portion 195 is smaller than the planar surface of top portion 194, e.g., in a plane parallel to the longitudinal axis. In embodiments, tip 192a, side segments 193, top portion 194, and bottom portion 195 are configured to seal tissue as described above. In addition, tip 192a, side segments 193, top portion 194, bottom portion 195, and notch 196 are configured to dissect tissue as described above.

[0032] Referring to FIGS. 5C and 6C, yet another exemplary embodiment of a distal portion 292 in accordance with the present disclosure is shown. Distal portion 292 includes a planar distal tip 292a, planar side segments 293, an arcuate top portion 294, a pointed bottom portion 295, and a notch 296. Distal portion 292 is similar to distal portion 92 described above, as such only the differences will be described in detail below for reasons of brevity. Bottom portion 295 includes planar surfaces 295a that converge to form a pointed edge. In some embodiments, the pointed edge at the convergence of planar surfaces 295a is sharpened to improve the cutting properties of bottom portion 295a. Notch 296 includes a vertical distal surface 296a and an angled planar surface 296b. Vertical distal surface 296a of notch 296 may also be sharpened to improve the cutting properties of notch 296. In this embodiment, tip 292a, side segments 293, top portion 294, and planar surfaces 295a of bottom portion 295 are configured to seal tissue as described above. In addition, tip 292a, side segments 293, top portion 294, bottom portion 295, and notch 296 are configured to dissect tissue as described above.

[0033] Referring to FIGS. 5D and 6D, still another exemplary embodiment of a distal portion 392 in accordance with the present disclosure is shown. Distal portion 392 includes a planar distal tip 392a, planar side segments 393, a planar top portion 394, a concave bottom portion 395, and a notch 396. Distal portion 392 is similar to distal portion 92 described above, as such only the differences will be described in detail below for reasons of brevity. Concave bottom portion 395 may be generally arcuate, which improves the cutting properties of distal portion 392 along bottom portion 395 between side segments 393. Notch 396 includes a vertical distal surface 396a and an arcuate surface 396b extending proximally therefrom. Vertical distal surface 396a may be sharpened to improve the cutting properties of notch 396. In this embodiment, tip 392a, side segments 393, and top portion 394 are configured to seal tissue as described above. In addition, tip 392a, side segments 393, top portion 394, bottom portion 395, and notch 396 are configured to dissect tissue as described above.

[0034] Referring to FIGS. 5E and 6E, still yet another exemplary embodiment of a distal portion 492 in accord-

ance with the present disclosure is shown. Distal portion 492 includes a planar distal tip 492a, planar side segments 493, a planar top portion 494, a recessed bottom portion 495, and a notch 496. Distal portion 492 is similar to distal portion 92 described above, as such only the differences will be described in detail below for reasons of brevity. Recessed bottom portion 495 includes inwardly converging angled planar surfaces. The recess of bottom portion 495 may improve the cutting properties of distal portion 492 along bottom portion 495 between side segments 493. Notch 496 includes an arcuate surface 496a and a vertical proximal surface 496b. Vertical proximal surface 496b may be sharpened to improve the cutting properties of notch 496. In this embodiment, tip 492a, side segments 493, and top portion 494 are configured to seal tissue as described above. In addition, tip 492a, side segments 493, top portion 494, bottom portion 495, and notch 496 are configured to dissect tissue as described above.

[0035] Referring to FIGS. 5F and 6F, another exemplary embodiment of a distal portion 592 in accordance with the present disclosure is shown. Distal portion 592 includes a pointed distal tip 592a, planar side segments 593, a concave top portion 594, a planar bottom portion 595, and a notch 596. Distal portion 592 is similar to distal portion 92 described above, as such only the differences will be described in detail below for reasons of brevity. Pointed distal tip 592a may be sharpened to improve the cutting properties of distal tip 592a. Concave top portion 594 is generally arcuate, which improves the cutting properties of distal portion 592 along top portion 594 between side segments 593. Notch 596 includes an angled surface 596a and a vertical proximal surface 596b. Vertical proximal surface 596b may be sharpened to improve the cutting properties of notch 596. In this embodiment, side segments 593, tapered segments 593a, and bottom portion 595 are configured to seal tissue as described above. In addition, tip 592a, side segments 593, tapered segments, 593a, top portion 594, bottom portion 595, and notch 596 are configured to dissect tissue as described above.

[0036] Referring to FIGS. 5G and 6G, yet another exemplary embodiment of a distal portion 692 in accordance with the present disclosure is shown. Distal portion 692 includes a pointed distal tip 692a, planar side segments 693, a planar top portion 694, a bottom portion 695, a proximal notch 696c, and a distal notch 696d. Distal portion 692 is similar to distal portion 92 described above, as such only the differences will be described in detail below for reasons of brevity. Pointed distal tip 692a may be sharpened to improve the cutting properties thereof.

[0037] As shown in FIG. 6G, bottom portion 695 includes planar surfaces 695a and an arcuate surface 695b. Planar surfaces 695a converge to form a pointed tip. In some embodiments, the pointed tip at the convergence of planar surfaces 695a may be sharpened to improve the cutting properties of a portion of bottom portion

695. Arcuate surface 695b is positioned proximal to planar surfaces 695a. In embodiments, arcuate surface 695b may be positioned proximal to planar surfaces 695a. Proximal notch 696c is generally arcuate and distal notch 696d includes a vertical distal surface 696a and an angled planar surface 696b. Vertical distal surface 696a may be sharpened to improve the cutting properties of distal notch 696d. It is envisioned that any of the notches described above may be used in place of either of notches 696c, 696d. In this embodiment, side segments 693, tapered segments 693a, top portion 694, and planar surfaces 695a of bottom portion 695 are configured to seal tissue as described above. In addition, tip 692a, side segments 693, tapered segments, 693a, top portion 694, bottom portion 695, and notches 696c, 696d are configured to dissect tissue as described above.

[0038] Distal portions 192, 292, 392, 492, 592, and 692 are used in a manner substantially similar to distal portion 92 described above, as such the use of these distal portions will not be discussed in detail.

[0039] Although various embodiments of distal portions have been described in detail above, it is envisioned that a distal portion may include any combination of features as described above. It is also envisioned that a distal portion may include more than two notches. Moreover, while particular elements of distal portions have been described as configured to seal and/or dissecting tissue, this is not meant to be limiting to the capabilities of these or other elements described above.

[0040] While several embodiments of the disclosure have been shown in the drawings, it is not intended that the disclosure be limited thereto, as it is intended that the disclosure be as broad in scope as the art will allow and that the specification be read likewise. Therefore, the above description should not be construed as limiting, but merely as exemplifications of particular embodiments. Those skilled in the art will envision other modifications within the scope and spirit of the claims appended hereto.


Claims

1. A tool assembly comprising:

an ultrasonic blade including a proximal portion and a distal portion extending from the proximal portion, the distal portion defining a longitudinal axis and including:

a top portion configured to seal tissue;
a bottom portion including at least one notch disposed on a surface thereof, wherein at least one of the top portion, the bottom portion, or the at least one notch is configured to dissect tissue; and
planar side segments extending between the top and bottom portions; and a jaw mem-

- ber configured to move relative to the ultrasonic blade and to contact the top portion.
2. The tool assembly of claim 1, wherein the distal portion of the ultrasonic blade includes a planar distal tip. 5
 3. The tool assembly of claim 1, wherein the distal portion of the ultrasonic blade includes a pointed distal tip. 10
 4. The tool assembly of claim 1, 2 or 3, wherein the at least one notch is arcuate.
 5. The tool assembly of claim 1, 2 or 3, wherein the at least one notch includes a vertical surface. 15
 6. The tool assembly of claim 5, wherein the at least one notch further includes an arcuate surface.
 7. The tool assembly of any preceding claim, wherein the bottom portion includes converging planar surfaces. 20
 8. An ultrasonic surgical instrument, comprising: 25
 - a handle assembly;
 - an elongated body extending distally from the handle assembly, the elongated body defining a longitudinal axis and including a waveguide; and 30
 - a tool assembly including a blade coupled to a distal end of the waveguide and a jaw member moveable relative to the blade, the blade including a proximal portion and a distal portion extending from the proximal portion, the distal portion including: 35
 - a top portion configured to seal tissue;
 - a bottom portion including at least one notch disposed on a surface thereof, wherein at least one of the top portion, the bottom portion, or the at least one notch is configured to dissect tissue; and 40
 - planar side segments extending between the top and bottom portions. 45
 9. The surgical instrument of claim 8, wherein the jaw member is moveable between an open position, wherein the jaw member is spaced from the blade, and a closed position, wherein the jaw member is in juxtaposed alignment with the blade and clamps tissue against the top portion. 50
 10. The ultrasonic surgical instrument of claim 8 or 9, wherein the distal portion of the blade includes a planar distal tip. 55
 11. The ultrasonic surgical instrument of claim 8 or 9,
 12. The ultrasonic surgical instrument of claim 8, 9, 10 or 11, wherein the at least one notch is arcuate.
 13. The ultrasonic surgical instrument of claim 8, 9, 10 or 11, wherein the at least one notch includes a vertical surface.
 14. The ultrasonic surgical instrument of claim 13, wherein the at least one notch further includes an arcuate surface.
 15. The ultrasonic surgical instrument of any one of claims 8 to 14, wherein the bottom portion includes converging planar surfaces.

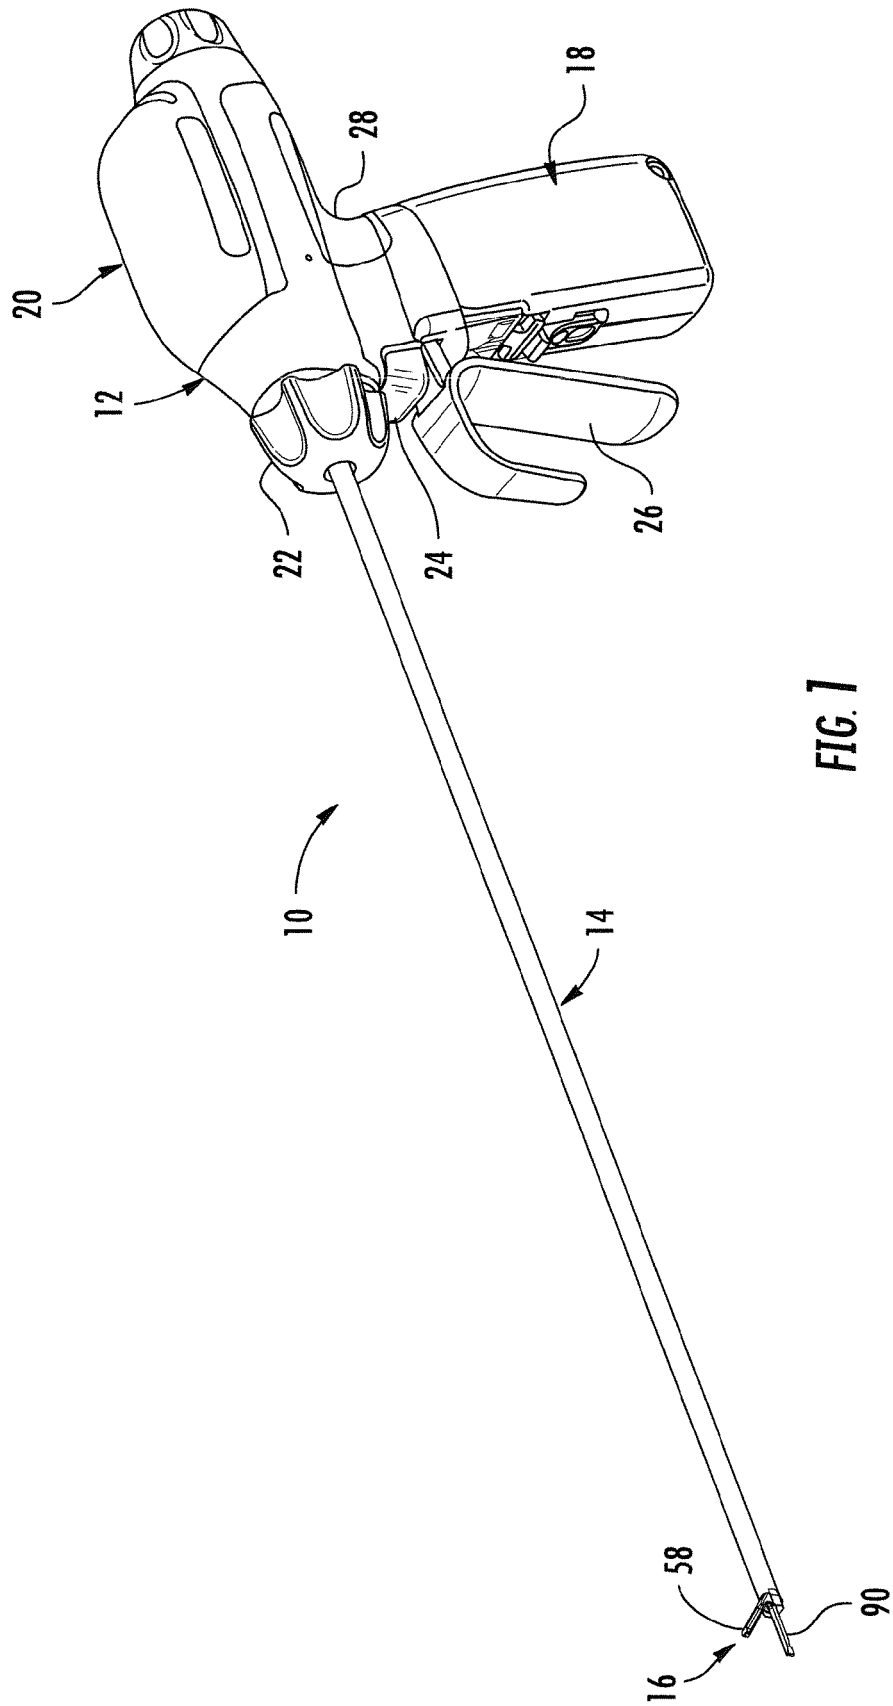

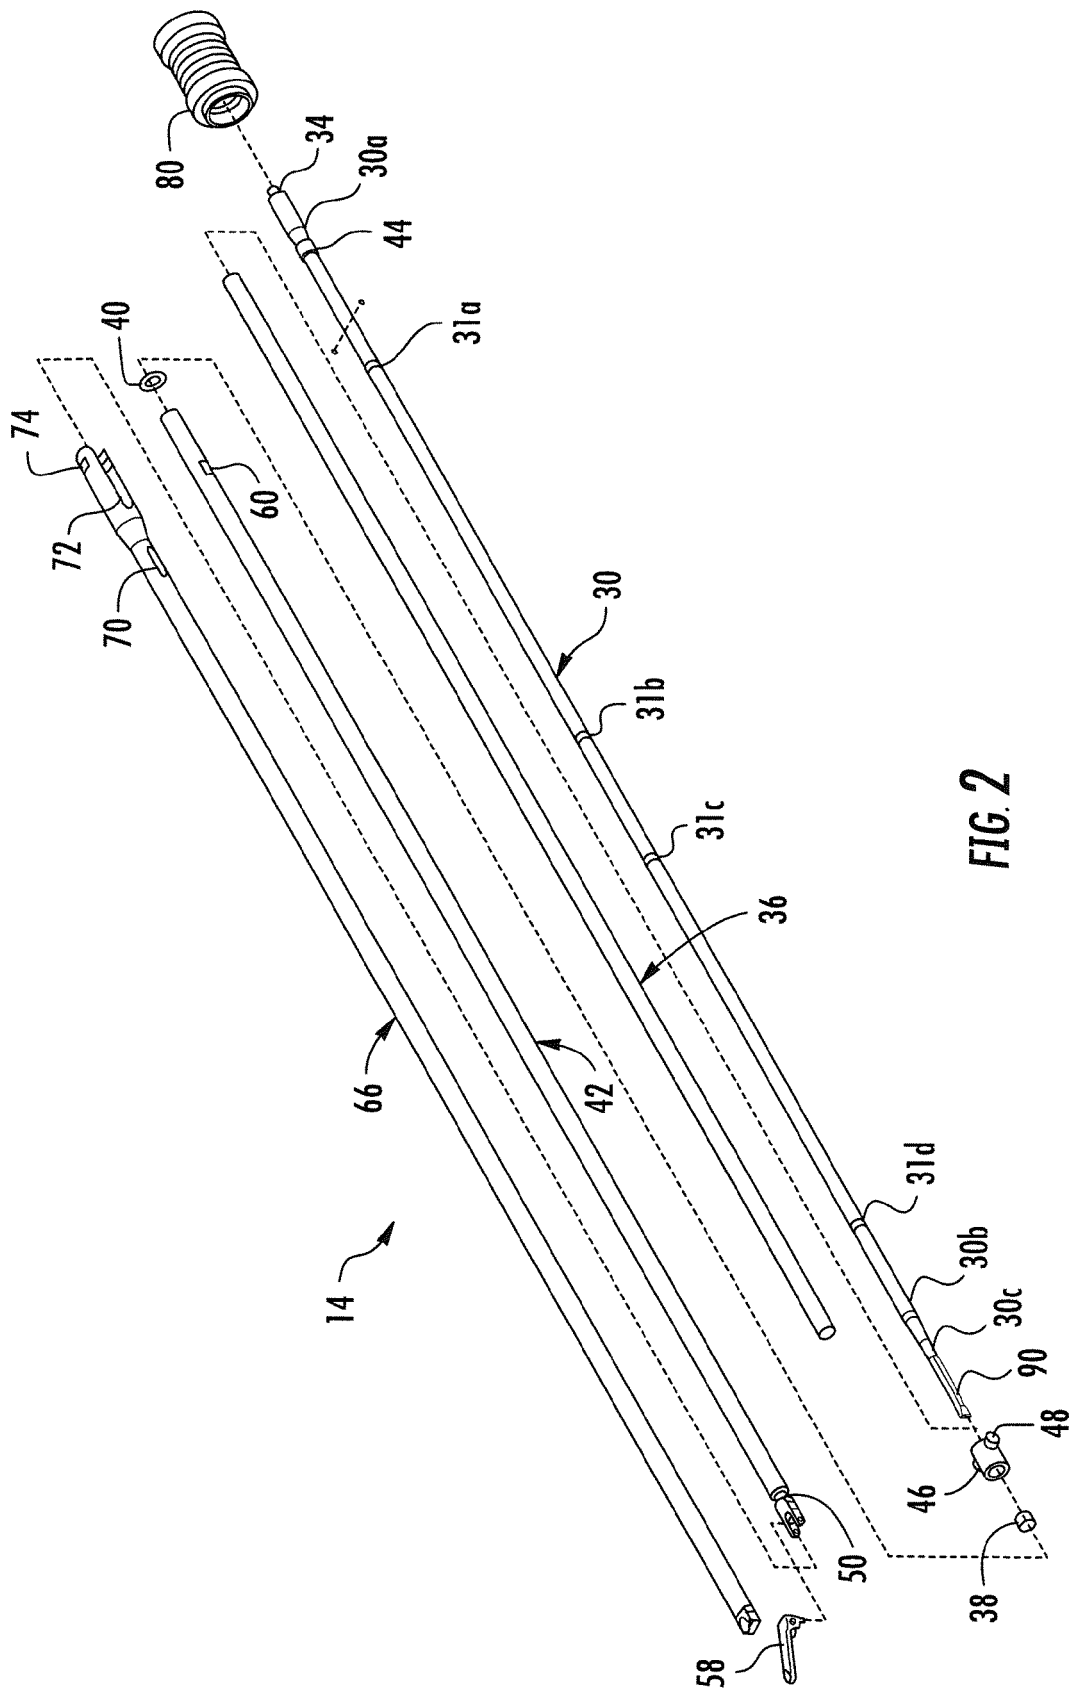
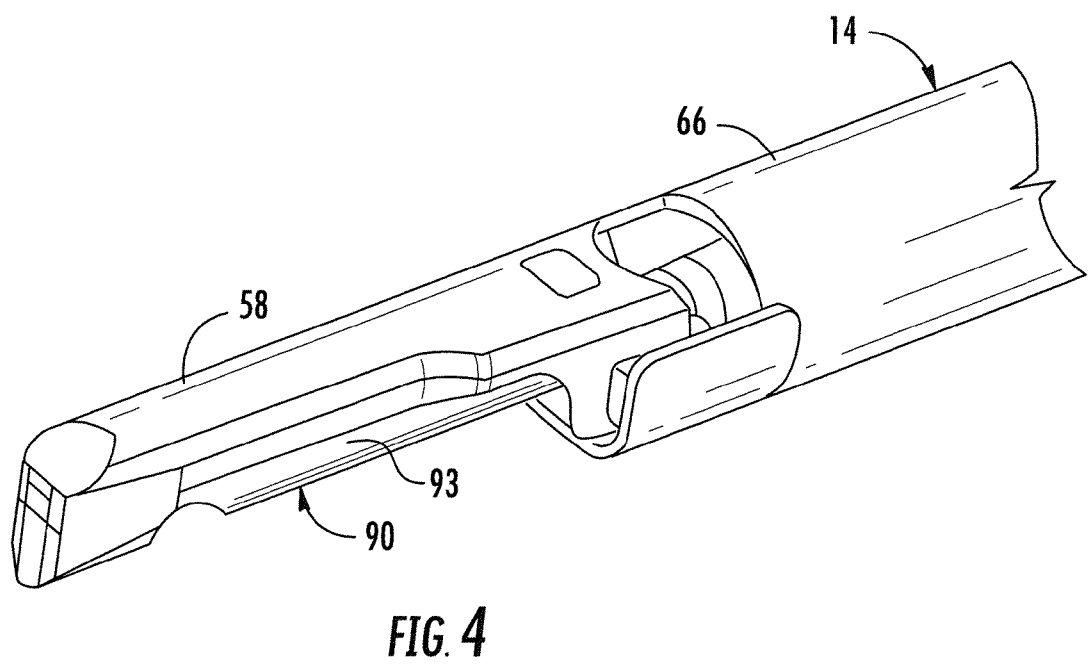
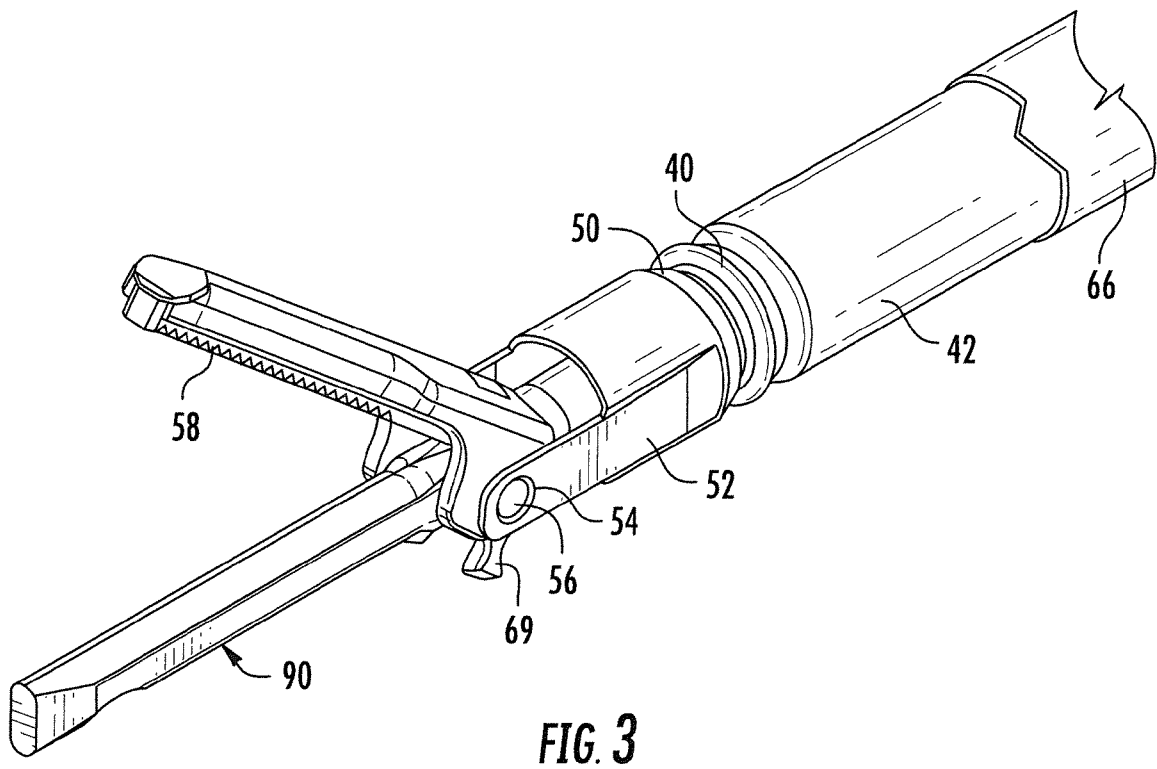


FIG. 2



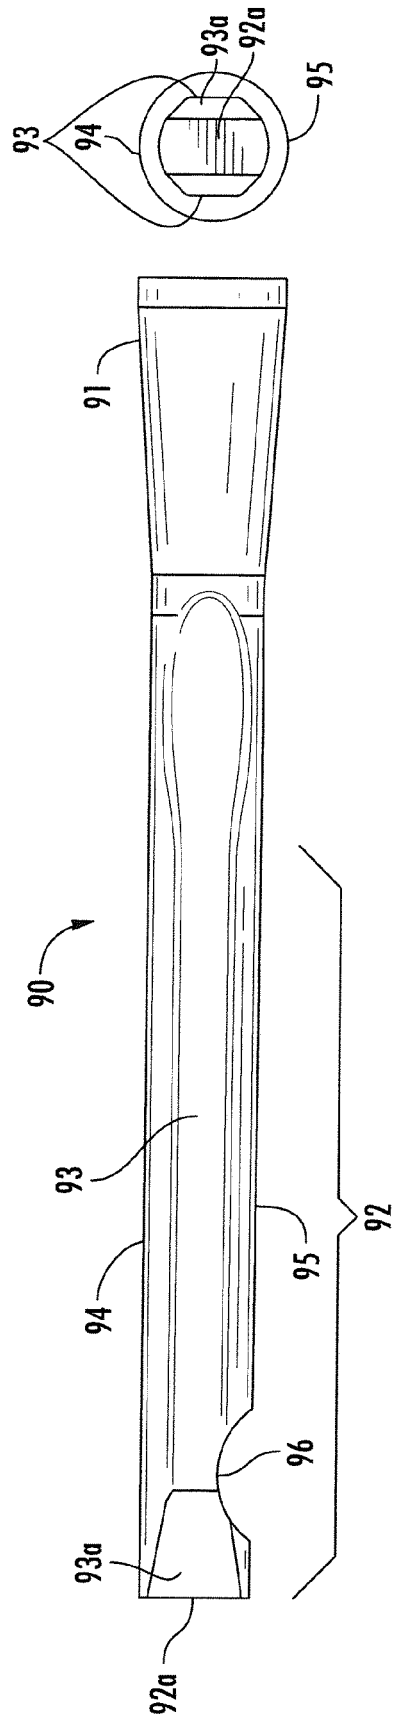


FIG. 5A




FIG. 6A

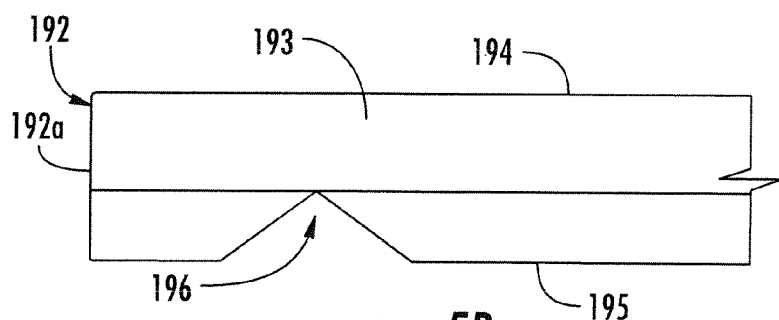


FIG. 5B




FIG. 6B

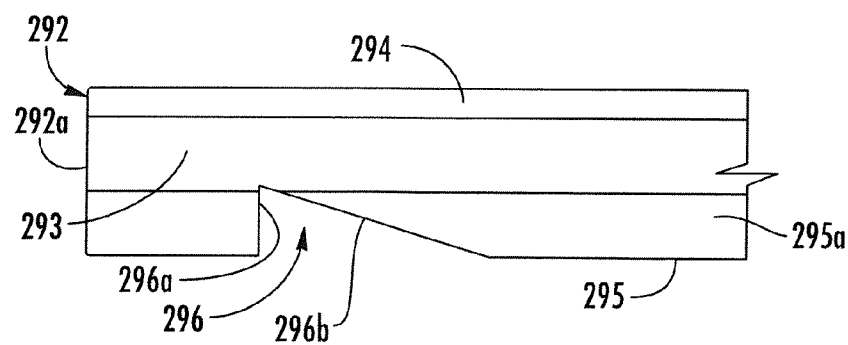


FIG. 5C




FIG. 6C

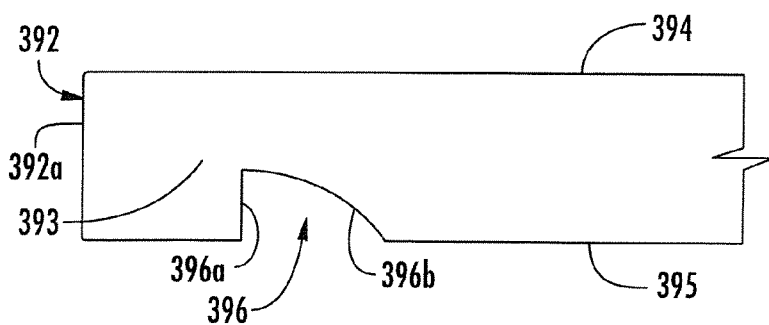


FIG. 5D










FIG. 6D

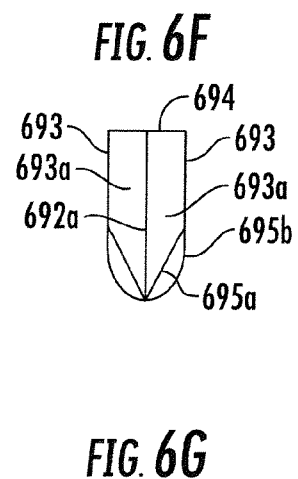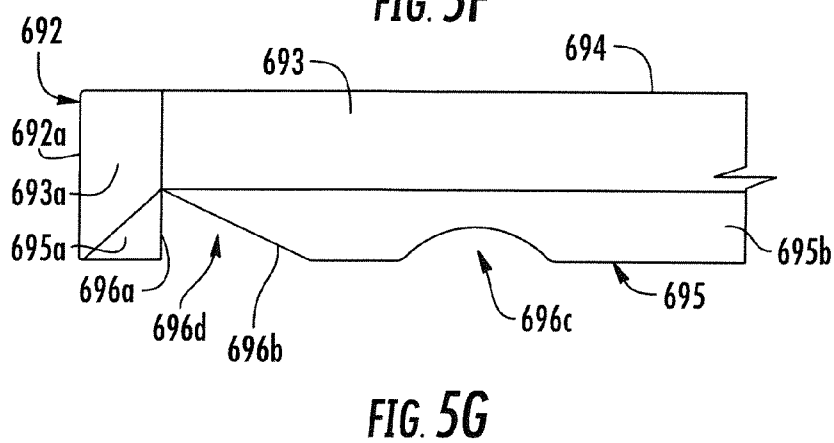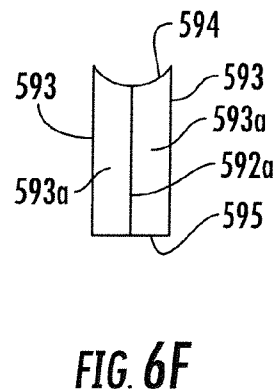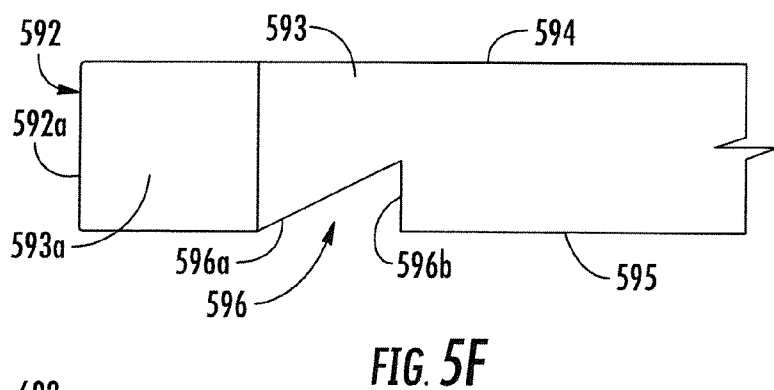

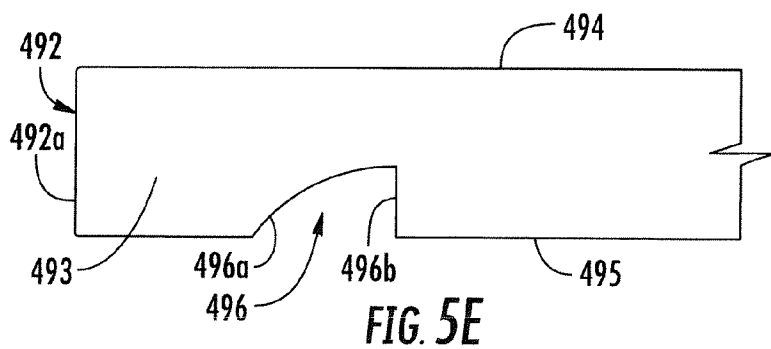

EUROPEAN SEARCH REPORT

Application Number
EP 14 18 4055

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	US 6 669 690 B1 (OKADA MITSUMASA [JP] ET AL) 30 December 2003 (2003-12-30) * column 11, line 8 - column 12, line 18; figures 1,4,27,28,33-37,53-75, 77-87 * * column 26, line 8 - column 29, line 19 * * column 37, line 64 - column 49, line 50 * * column 50, line 31 - column 57, line 29 *	1-15	INV. A61B17/32 ADD. A61B17/00
X	US 2008/234710 A1 (NEUROHR MARK A [US] ET AL) 25 September 2008 (2008-09-25) * paragraph [0106] - paragraph [0108]; figures 12-15,36-39 * * paragraph [0133] - paragraph [0135] *	1-15	
A	WO 93/14709 A1 (ULTRACISION INC [US]) 5 August 1993 (1993-08-05) * page 8, last paragraph - page 16, paragraph f; figures 1-9 *	1-15	
A	US 6 117 152 A (HUITEMA THOMAS W [US]) 12 September 2000 (2000-09-12) * column 4, line 12 - column 7, line 55; figures 1-5,9-18 *	1-15	TECHNICAL FIELDS SEARCHED (IPC) A61B
A	WO 2006/059120 A1 (ORTHOSONICS LTD [GB]; YOUNG MICHAEL JOHN RADLEY [GB]) 8 June 2006 (2006-06-08) * page 8, paragraph 2 - page 11, paragraph f; figures 1-2,4 * * page 13, paragraph f *	1-8, 10-15	
A	US 2009/216157 A1 (YAMADA NORIHIRO [JP]) 27 August 2009 (2009-08-27) * paragraph [0055] - paragraph [0146]; figures 1-26 *	1-15	
The present search report has been drawn up for all claims			
Place of search The Hague		Date of completion of the search 14 January 2015	Examiner Neef, Tatjana
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

EPO FORM 1503 03.02 (P04C01)



EUROPEAN SEARCH REPORT

Application Number
EP 14 18 4055

5

10

15

20

25

30

35

40

45

50

55

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
A	WO 2004/026104 A2 (ETHICON ENDO SURGERY INC [US]) 1 April 2004 (2004-04-01) * paragraph [0027] - paragraph [0052]; figures 1-4 *	1-15	
A	US 6 454 781 B1 (WITT DAVID A [US] ET AL) 24 September 2002 (2002-09-24) * column 4, line 28 - column 11, line 35; figures 1-12 *	1-15	
The present search report has been drawn up for all claims			TECHNICAL FIELDS SEARCHED (IPC)
Place of search		Date of completion of the search	Examiner
The Hague		14 January 2015	Neef, Tatjana
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document			

 1
EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 14 18 4055

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-01-2015

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 6669690 B1	30-12-2003	US 6669690 B1	30-12-2003
		US 2005004589 A1	06-01-2005
		US 2010324458 A1	23-12-2010
		US 2011004127 A1	06-01-2011

US 2008234710 A1	25-09-2008	NONE	

WO 9314709 A1	05-08-1993	CA 2129345 C	29-08-2000
		DE 69333190 D1	09-10-2003
		DE 69333190 T2	01-07-2004
		DE 69333501 D1	03-06-2004
		DE 69333501 T2	20-01-2005
		EP 0625028 A1	23-11-1994
		EP 0913125 A2	06-05-1999
		EP 1192907 A1	03-04-2002
		JP 3310288 B2	05-08-2002
		JP H08503621 A	23-04-1996
		US 5324299 A	28-06-1994
		WO 9314709 A1	05-08-1993

US 6117152 A	12-09-2000	NONE	

WO 2006059120 A1	08-06-2006	AU 2005311113 A1	08-06-2006
		CA 2590344 A1	08-06-2006
		CN 101141923 A	12-03-2008
		EP 1876978 A1	16-01-2008
		GB 2420979 A	14-06-2006
		US 2008188878 A1	07-08-2008
		US 2014316415 A1	23-10-2014
		WO 2006059120 A1	08-06-2006
		ZA 200705293 A	29-10-2008

US 2009216157 A1	27-08-2009	JP 5356442 B2	04-12-2013
		JP 2009195676 A	03-09-2009
		JP 2011139912 A	21-07-2011
		US 2009216157 A1	27-08-2009
		US 2012221030 A1	30-08-2012

WO 2004026104 A2	01-04-2004	AU 2003275034 A1	08-04-2004
		AU 2010200725 A1	18-03-2010
		CA 2499171 A1	01-04-2004
		CN 1694649 A	09-11-2005
		EP 1549232 A2	06-07-2005
		JP 4588452 B2	01-12-2010
		JP 2006513737 A	27-04-2006
		US 2005049546 A1	03-03-2005

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 14 18 4055

5

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

14-01-2015

10

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
		WO 2004026104 A2	01-04-2004
US 6454781 B1	24-09-2002	US 6454781 B1	24-09-2002
		US 2002183774 A1	05-12-2002

15

20

25

30

35

40

45

50

55

EPO FORM P0459

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

专利名称(译)	超声波解剖器和封闭器		
公开(公告)号	EP2853208A1	公开(公告)日	2015-04-01
申请号	EP2014184055	申请日	2014-09-09
[标]申请(专利权)人(译)	柯惠有限合伙公司		
申请(专利权)人(译)	COVIDIEN LP		
当前申请(专利权)人(译)	COVIDIEN LP		
[标]发明人	VAN TOL DAVID J ROSS ANTHONY B STODDARD ROBERT B		
发明人	VAN TOL, DAVID J. ROSS, ANTHONY B. STODDARD, ROBERT B.		
IPC分类号	A61B17/32 A61B17/00		
CPC分类号	A61B17/320092 A61B17/320068 A61B2017/00353 A61B2017/2929 A61B2017/2933 A61B2017/2936 A61B2017/2944 A61B2017/2948 A61B2017/320072 A61B2017/320078 A61B2018/00589 A61B2018 /00601 A61B2018/00607 A61N7/00		
优先权	14/464832 2014-08-21 US 61/882035 2013-09-25 US		
外部链接	Espacenet		

摘要(译)

工具组件包括超声刀和钳口构件。超声刀包括近端部分和远端部分。远端部分从近端部分延伸并限定纵向轴线。远端部分构造成沿纵向轴线摆动以超声处理组织。远端部分包括顶部，底部，凹口和平面侧部分。凹口设置在底部上。顶部，底部或凹口中的一个被配置为切开组织。顶部配置为密封组织。钳口构件构造成相对于超声刀片移动并且构造成接触顶部。

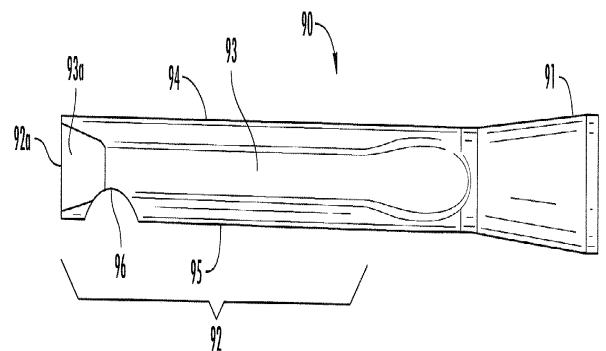


FIG. 5A