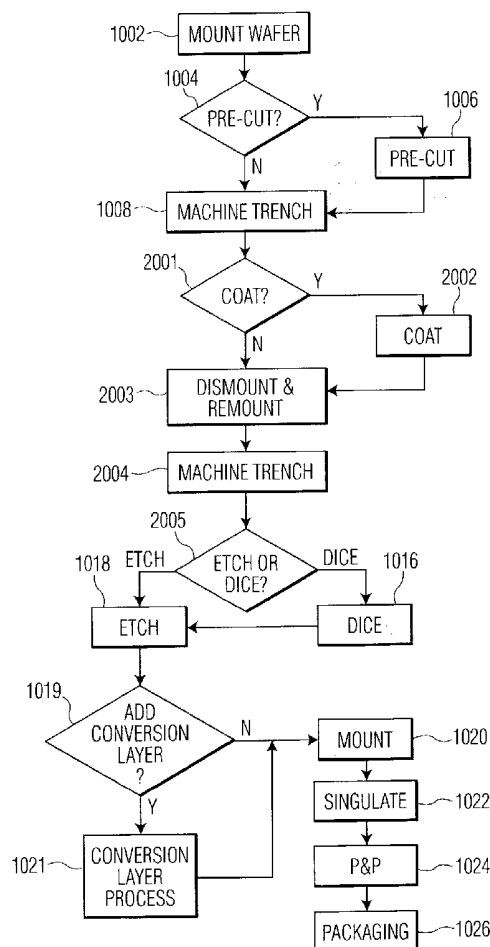


(19) **United States**(12) **Patent Application Publication****Keenan et al.**(10) **Pub. No.: US 2003/0199165 A1**(43) **Pub. Date:****Oct. 23, 2003**(54) **SYSTEM AND METHOD FOR THE
MANUFACTURE OF SURGICAL BLADES****Publication Classification**(51) **Int. Cl.⁷** **H01L 21/302; H01L 21/461**(52) **U.S. Cl.** **438/689**(75) Inventors: **Joseph Francis Keenan**, Cohasset, MA
(US); **Vadim Mark Daskal**, Watertown,
MA (US); **James Joseph Hughes**,
Dracut, MA (US)(57) **ABSTRACT**

Correspondence Address:

**ROYLANCE, ABRAMS, BERDO &
GOODMAN, L.L.P.****1300 19TH STREET, N.W.****SUITE 600****WASHINGTON,, DC 20036 (US)**(73) Assignee: **Becton, Dickinson and Company**(21) Appl. No.: **10/383,573**(22) Filed: **Mar. 10, 2003****Related U.S. Application Data**(60) Provisional application No. 60/362,999, filed on Mar.
11, 2002. Provisional application No. 60/430,332,
filed on Dec. 3, 2002.

A method for manufacturing surgical blades from either a crystalline or poly-crystalline material, preferably in the form of a wafer, is disclosed. The method includes preparing the crystalline or poly-crystalline wafers by mounting them and machining trenches into the wafers. The methods for machining the trenches, which form the bevel blade surfaces, include a diamond blade saw, laser system, ultrasonic machine, and a hot forge press. The wafers are then placed in an etchant solution which isotropically etches the wafers in a uniform manner, such that layers of crystalline or poly-crystalline material are removed uniformly, producing single or double bevel blades. Nearly any angle can be machined into the wafer which remains after etching. The resulting radii of the blade edges is **5-500 nm**, which is the same caliber as a diamond edged blade, but manufactured at a fraction of the cost.



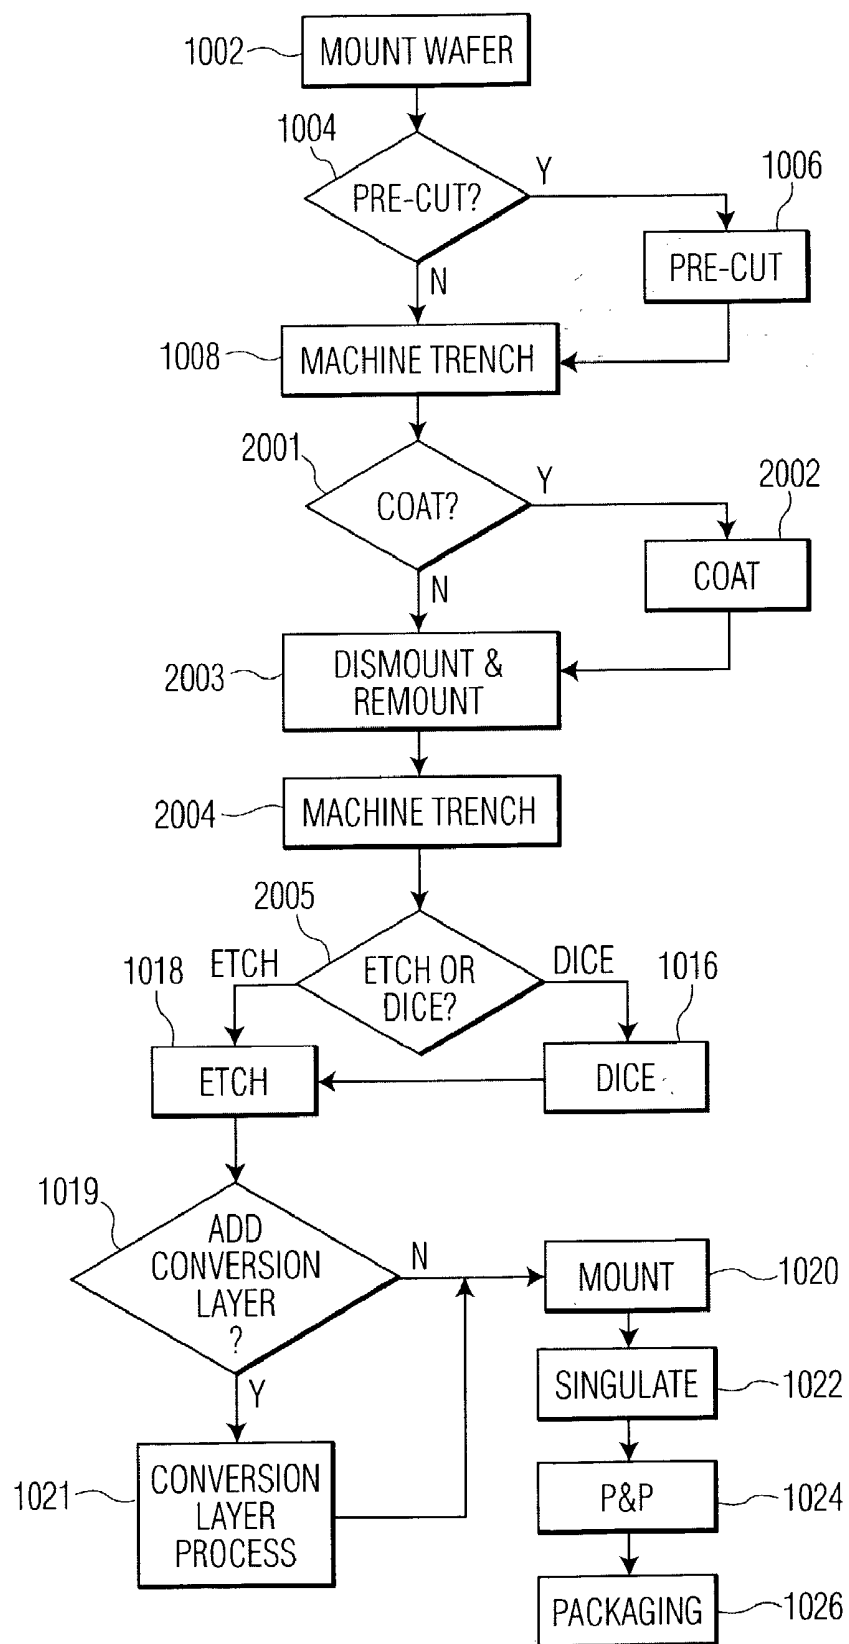


FIG. 1

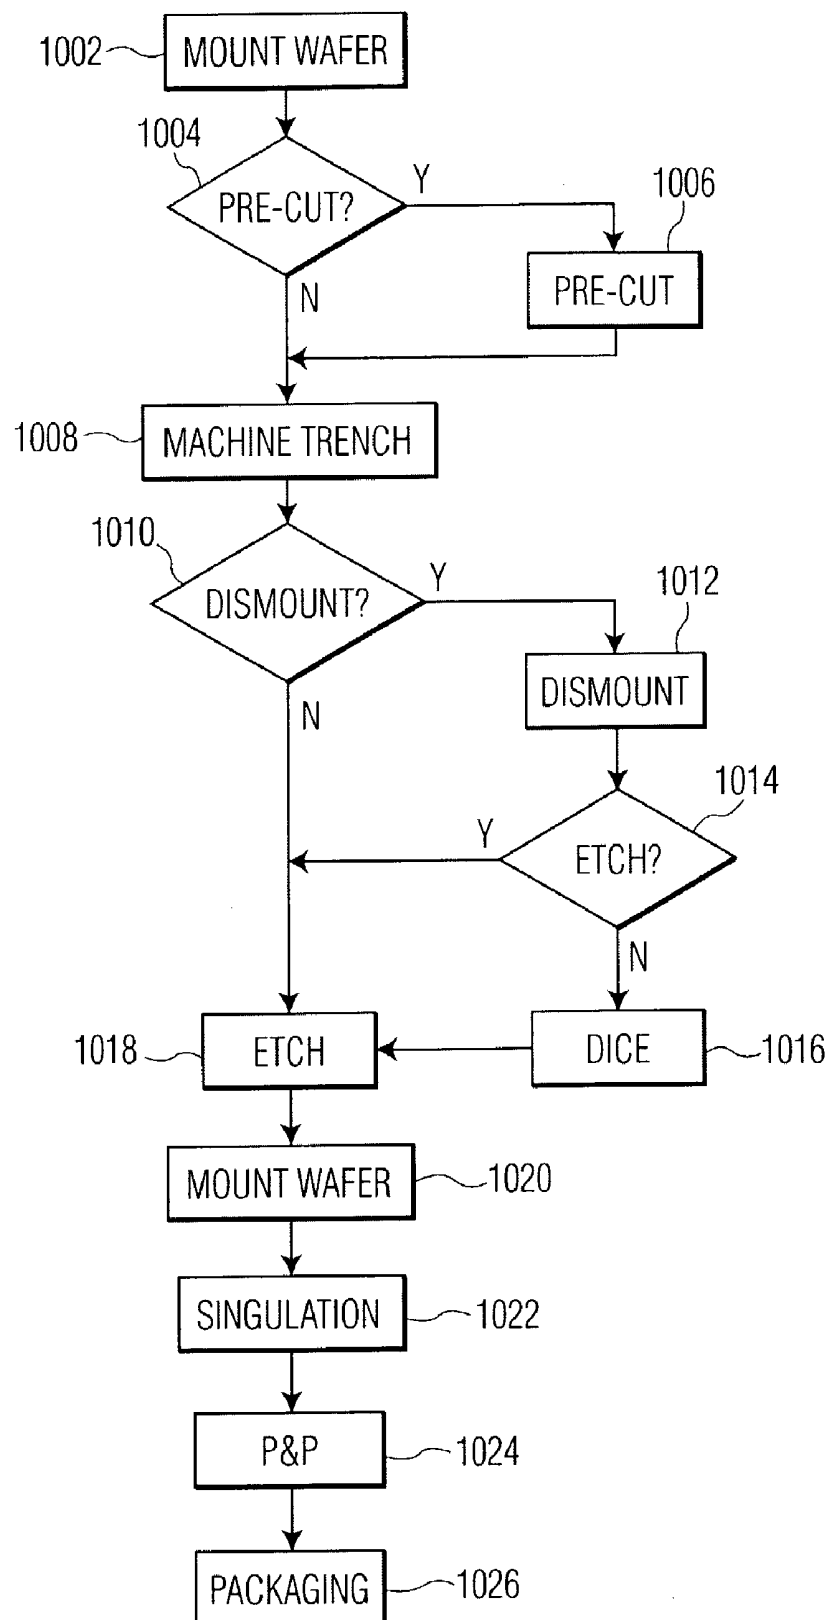


FIG. 2

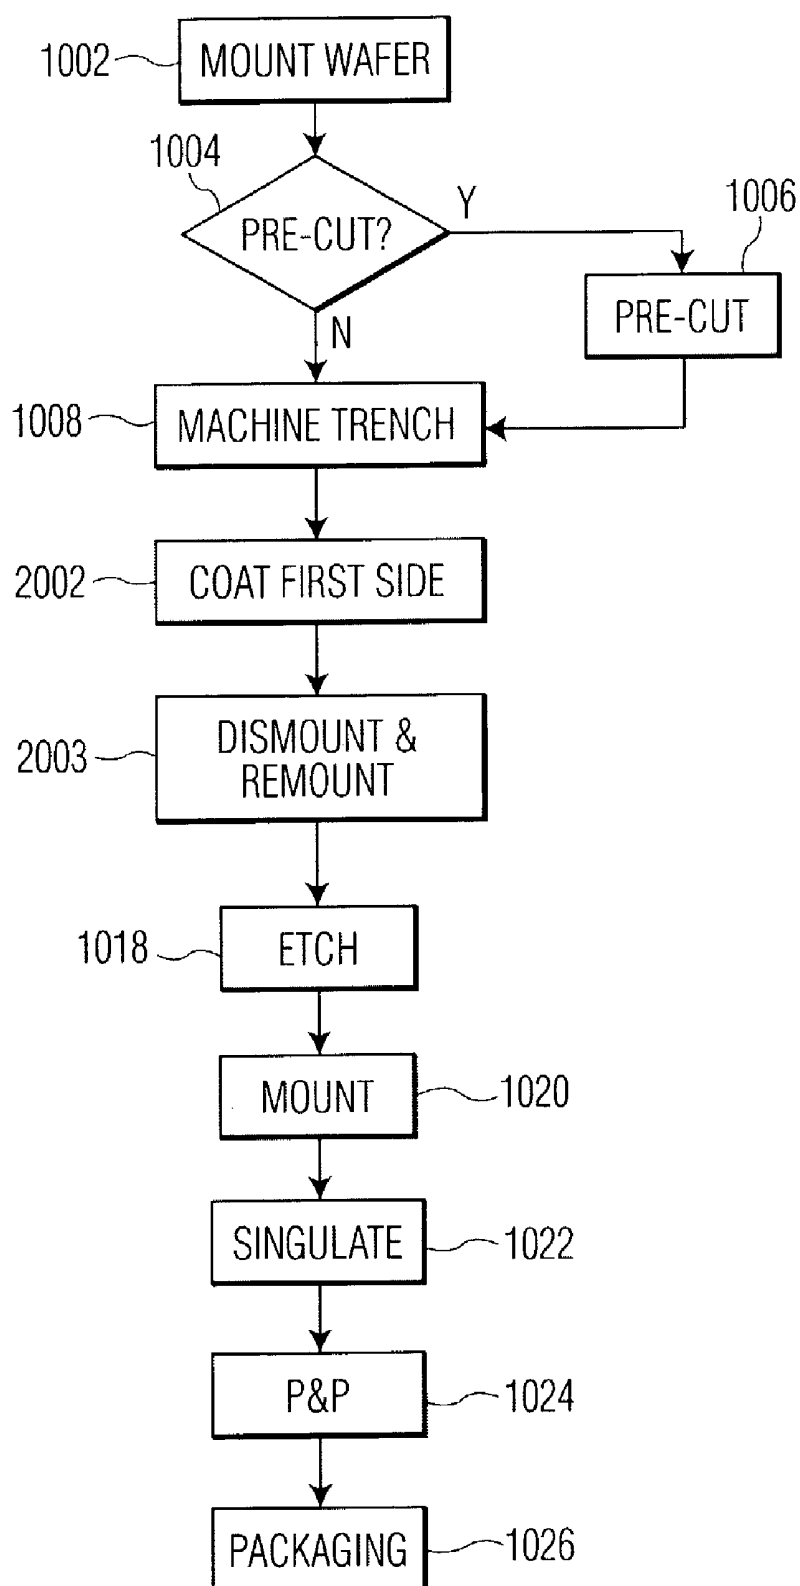


FIG. 3

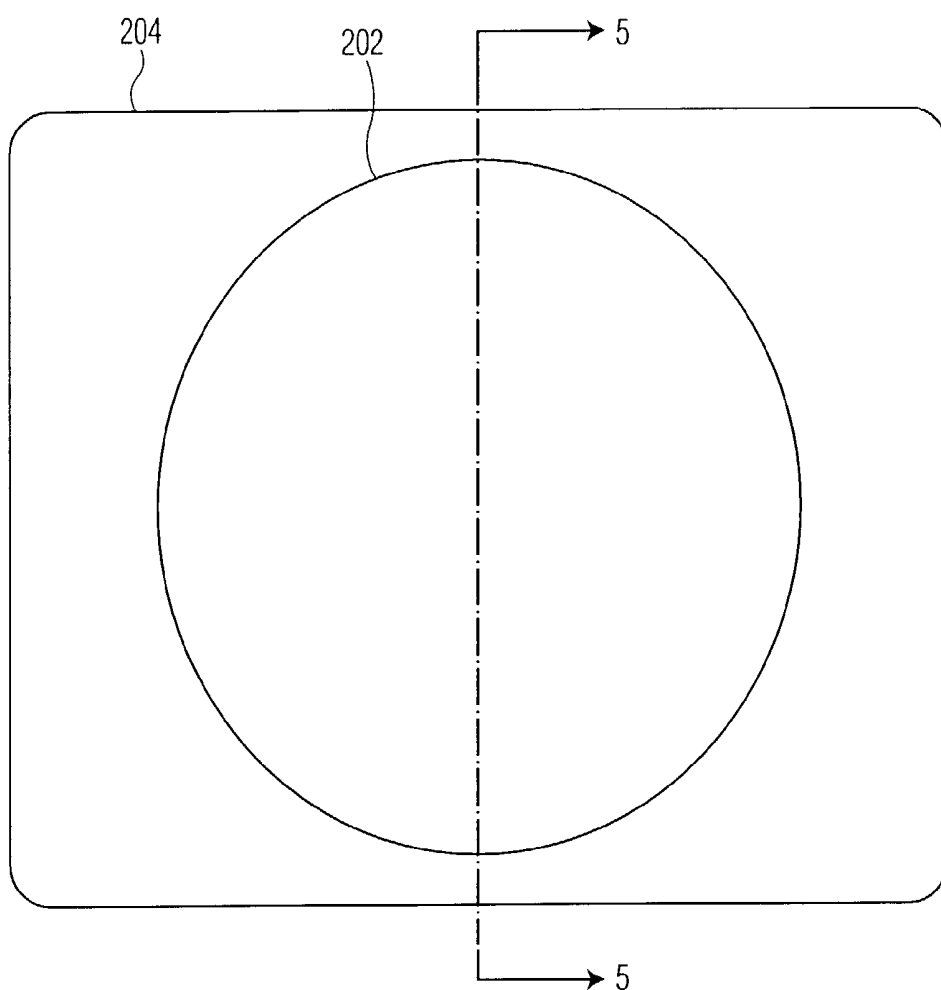


FIG. 4

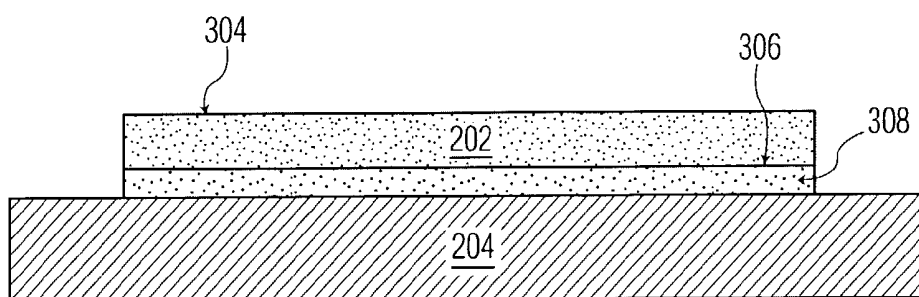


FIG. 5

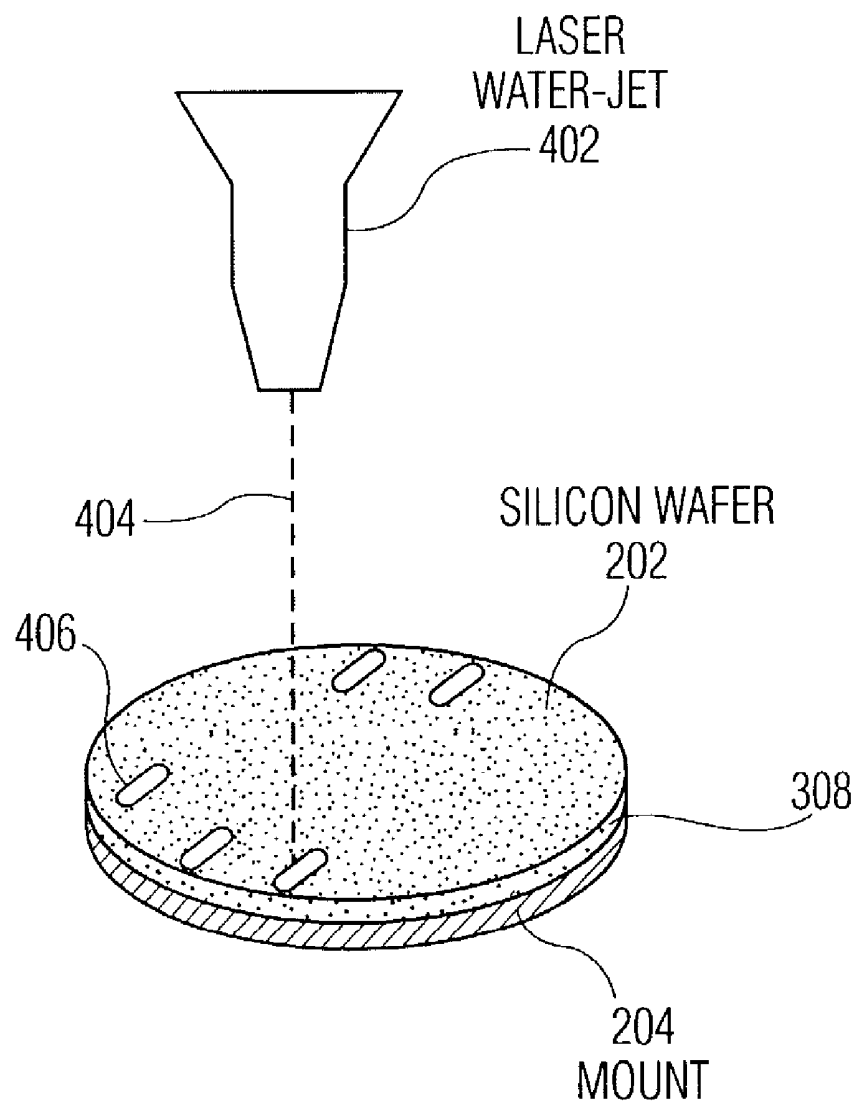


FIG. 6

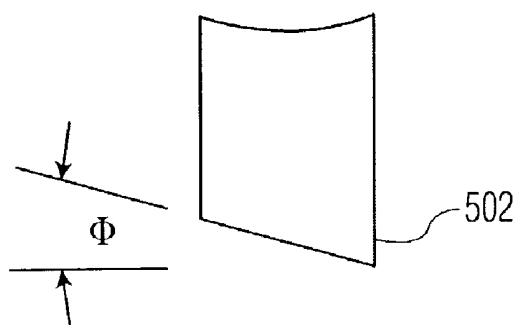


FIG. 7A

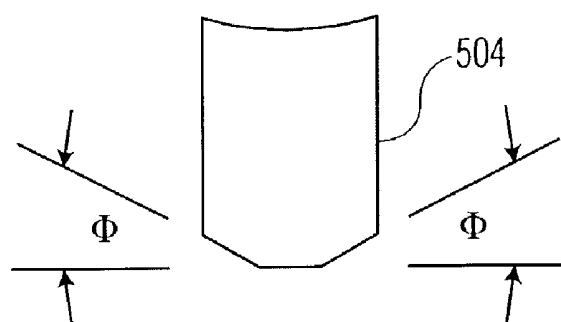


FIG. 7B

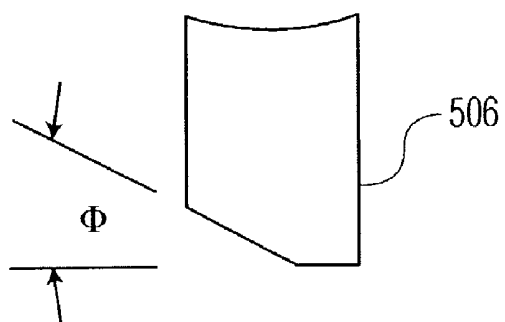


FIG. 7C

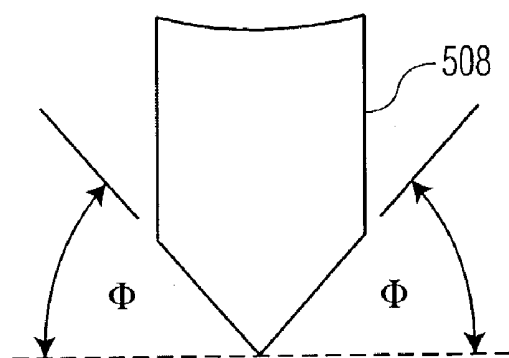


FIG. 7D

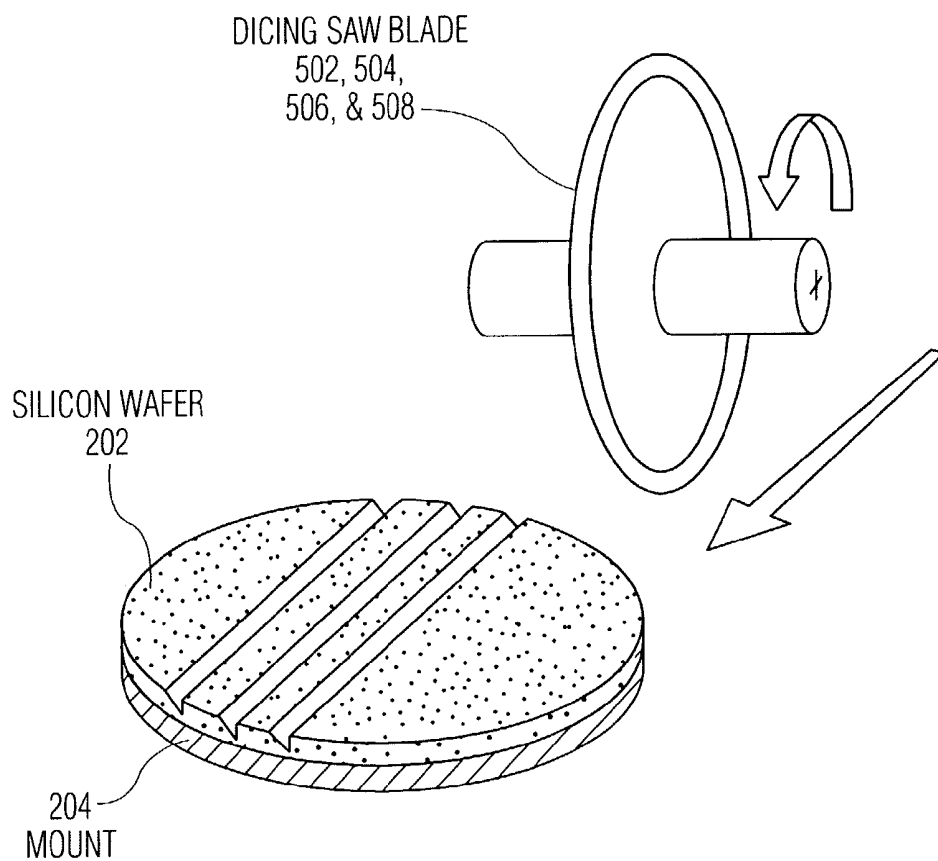


FIG. 8

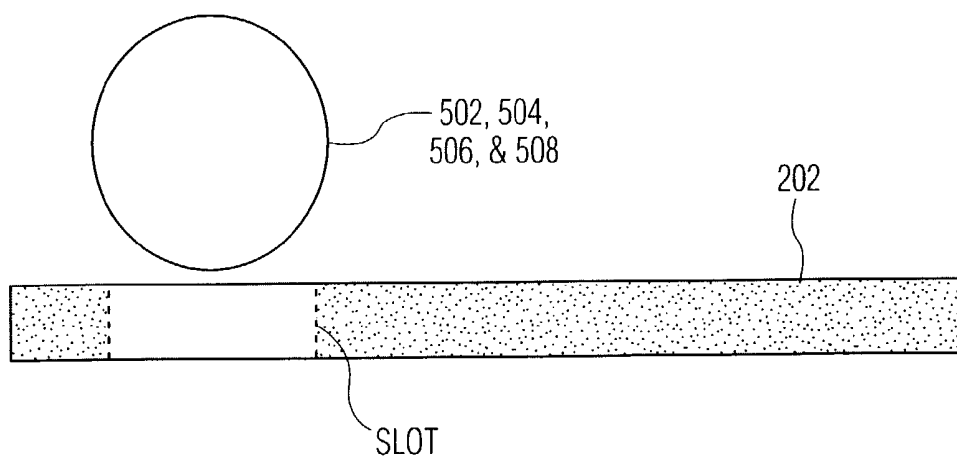


FIG. 8A

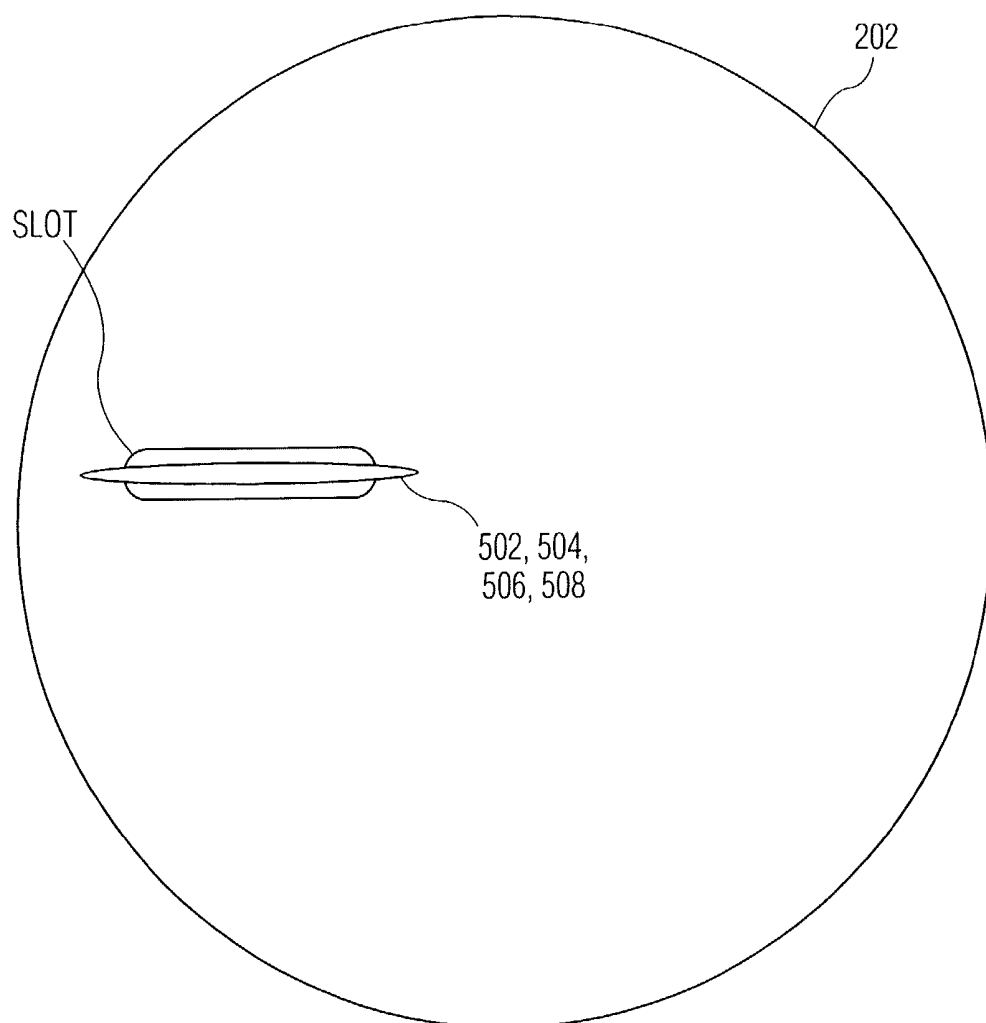


FIG. 8B

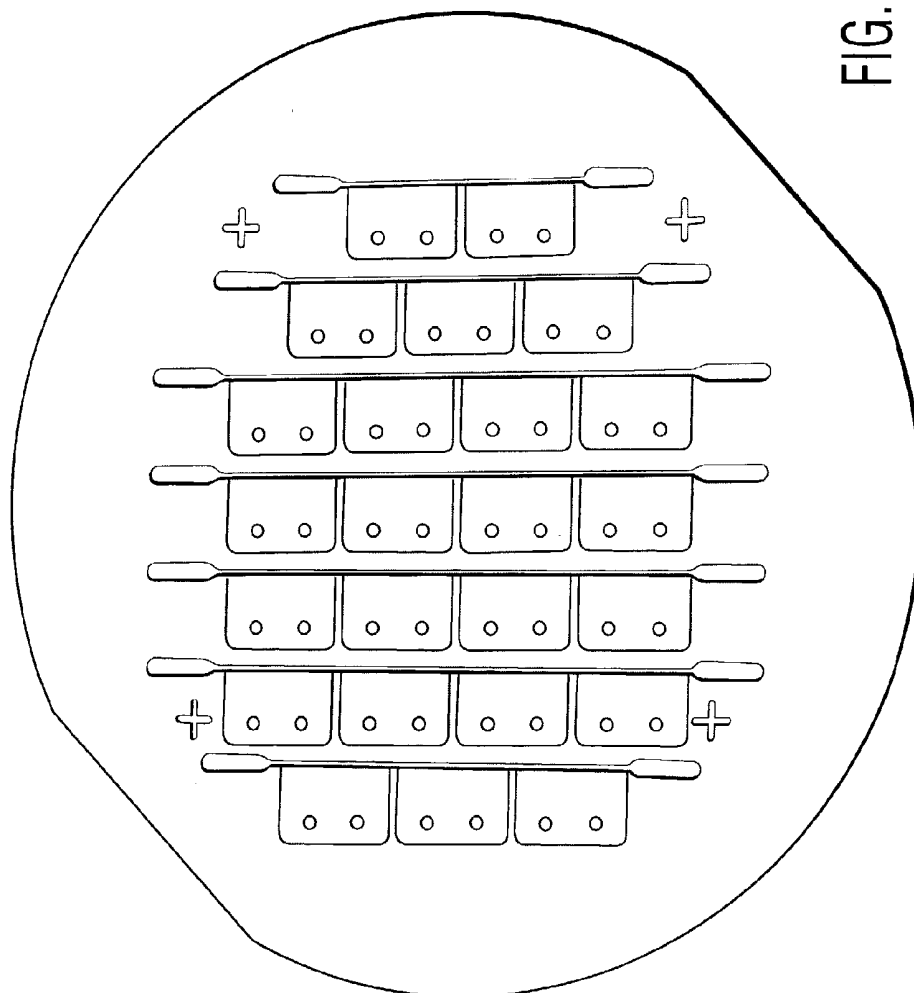


FIG. 8C

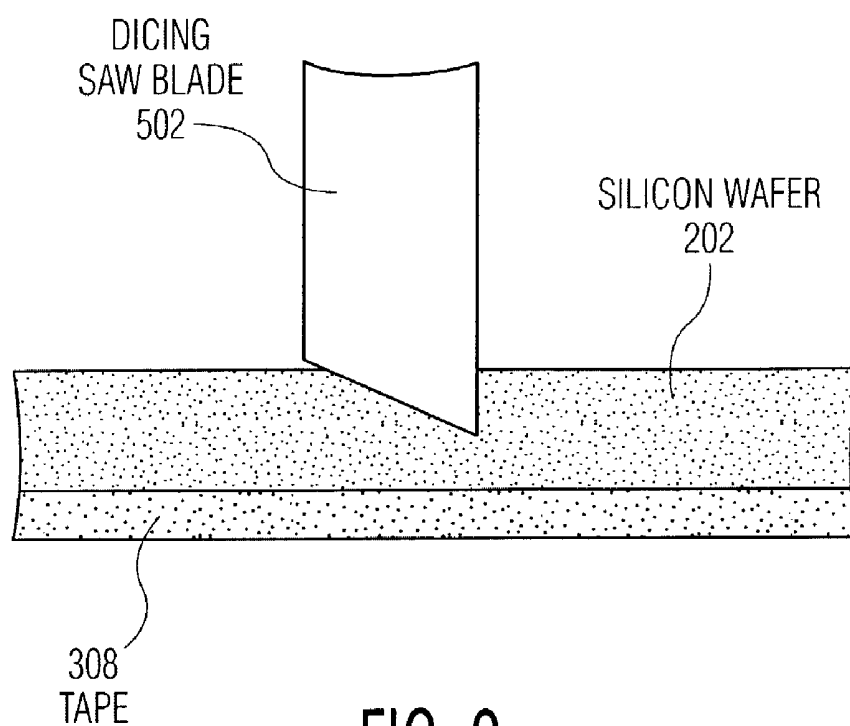


FIG. 9

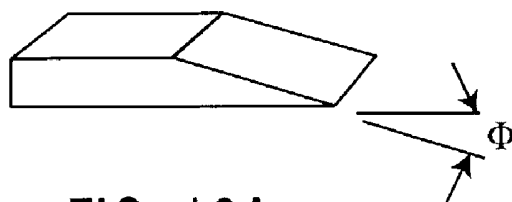


FIG. 10A

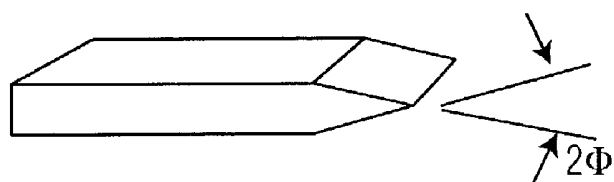


FIG. 10B

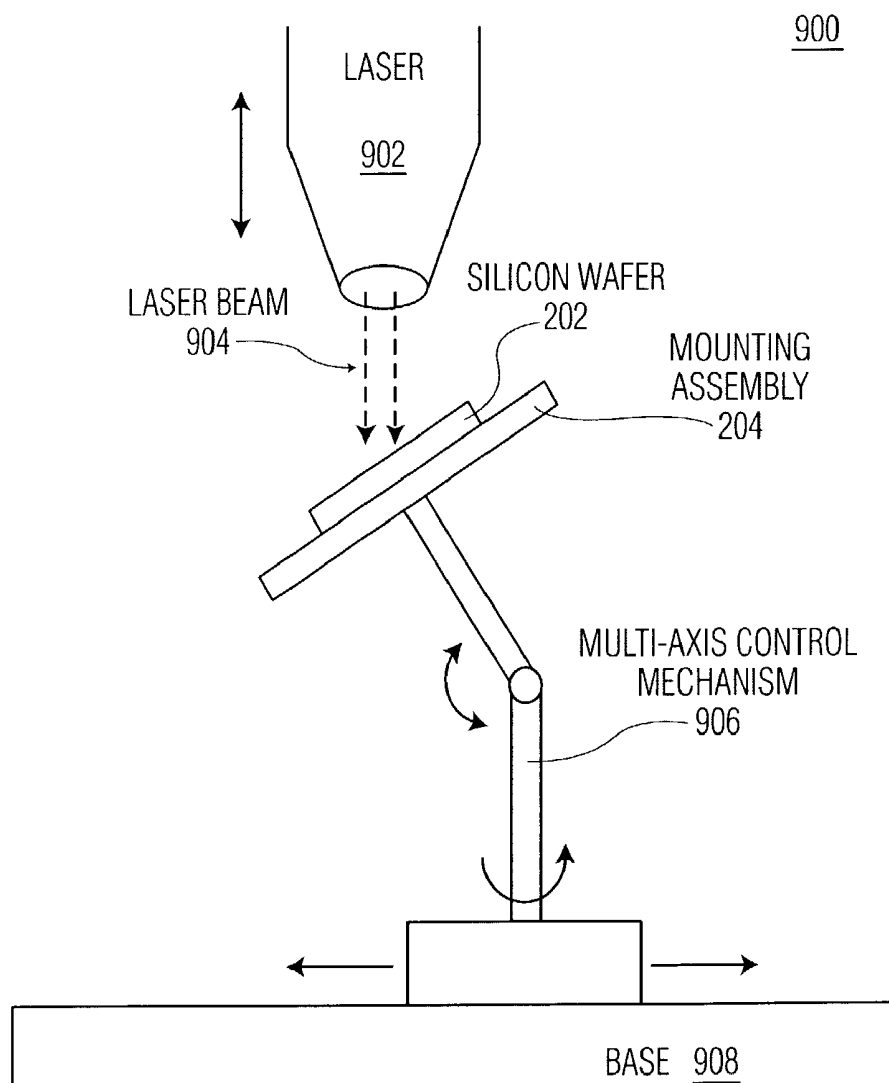


FIG. 11

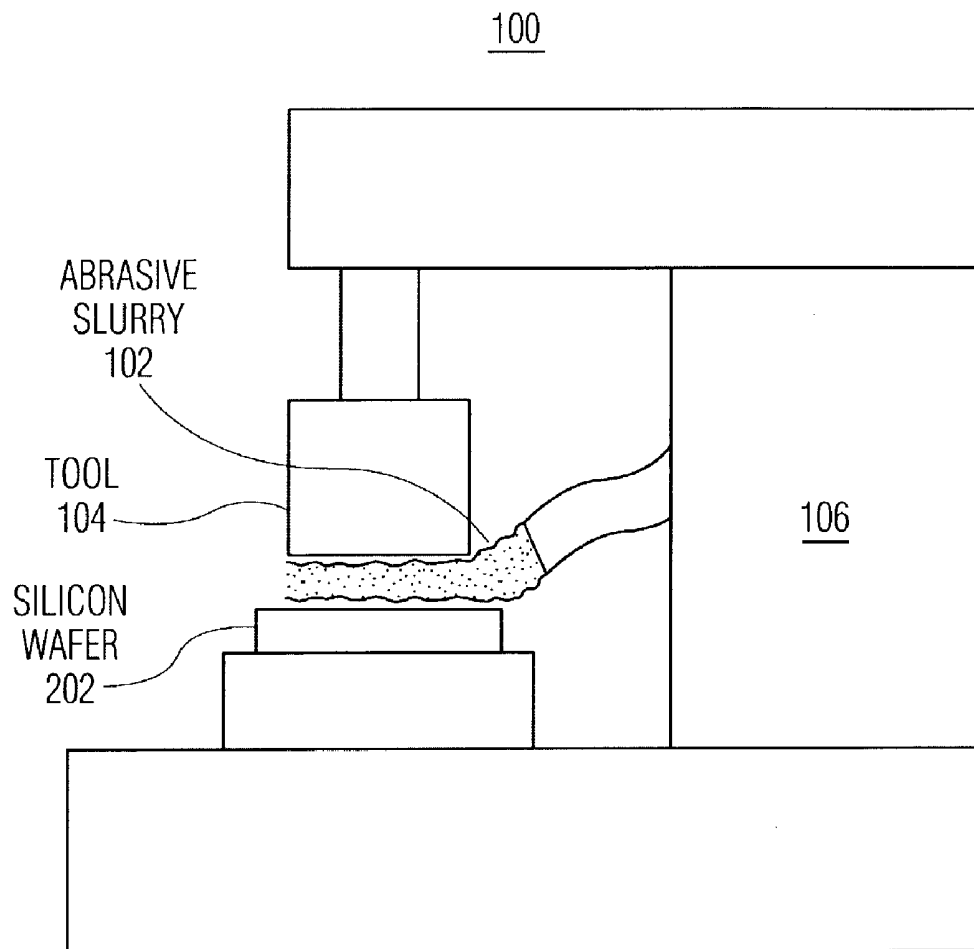


FIG. 12

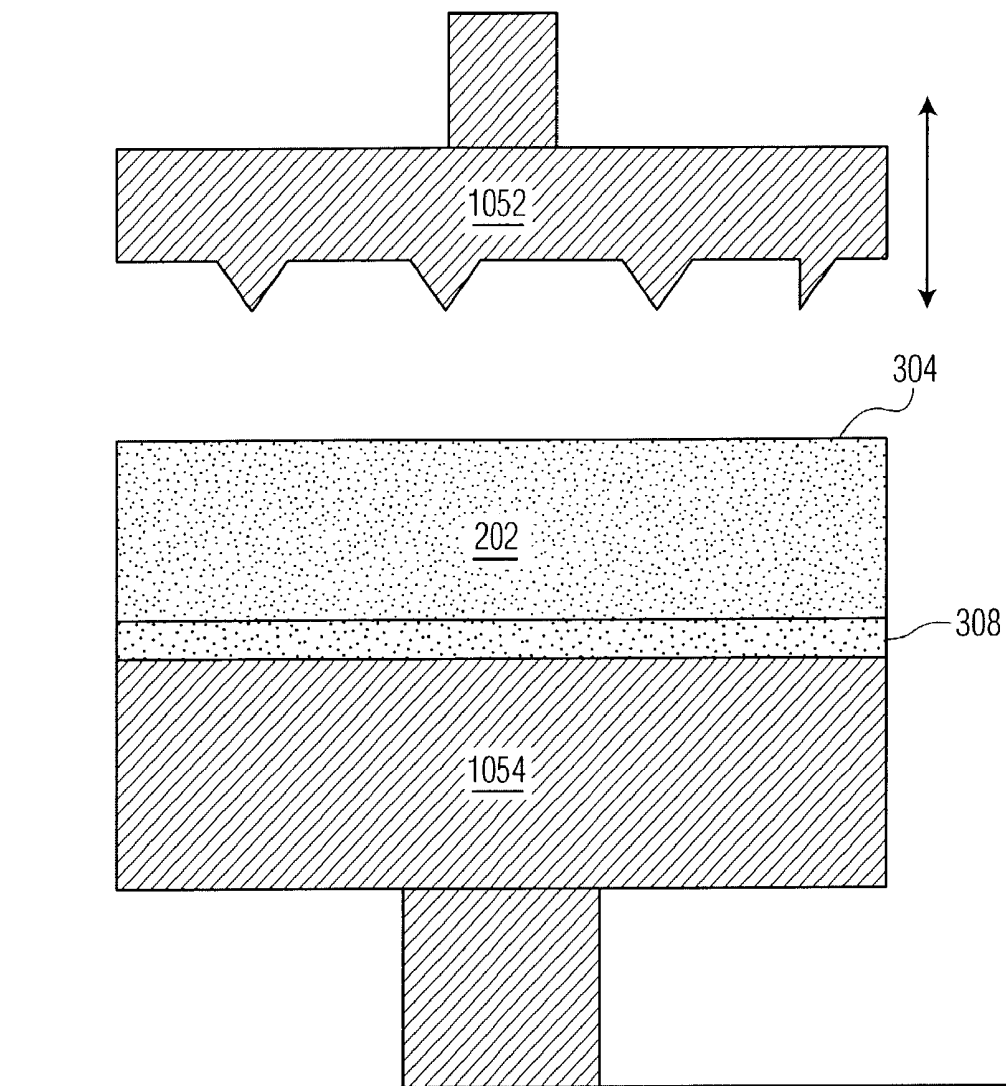


FIG. 13

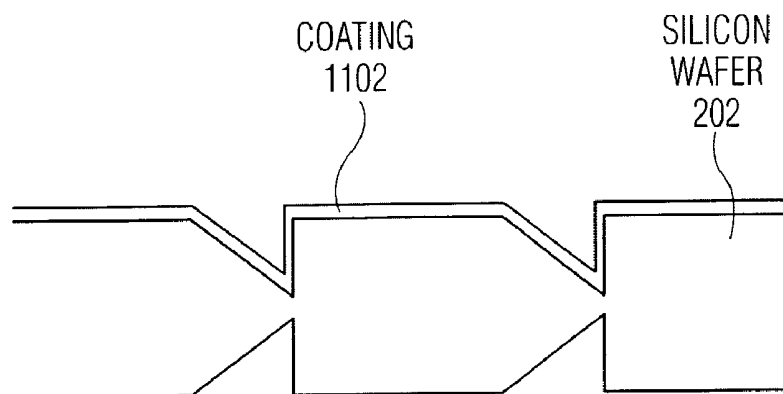


FIG. 14

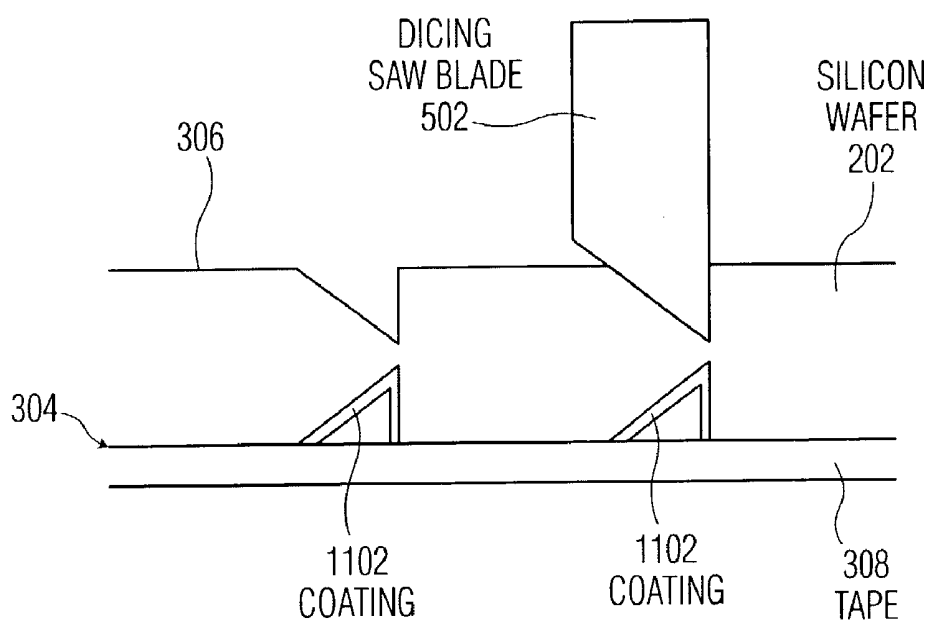


FIG. 15

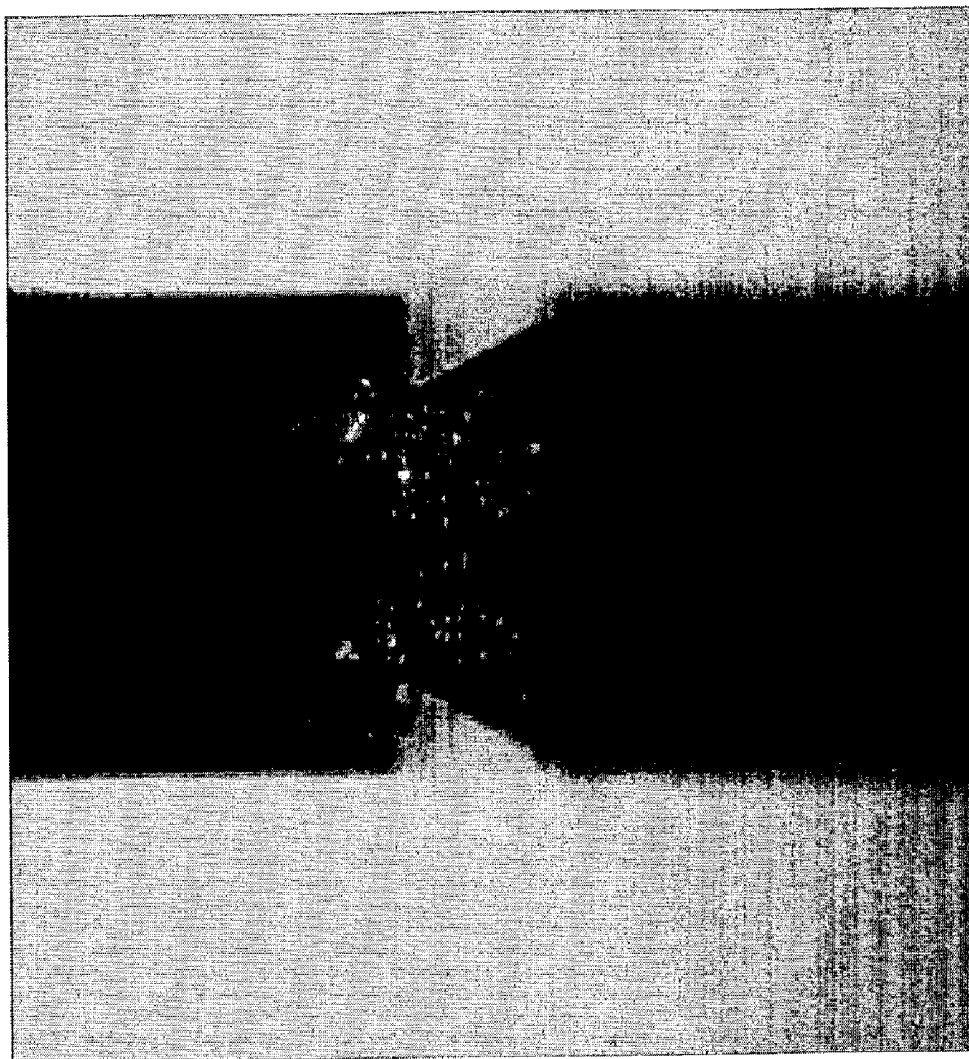


FIG. 16


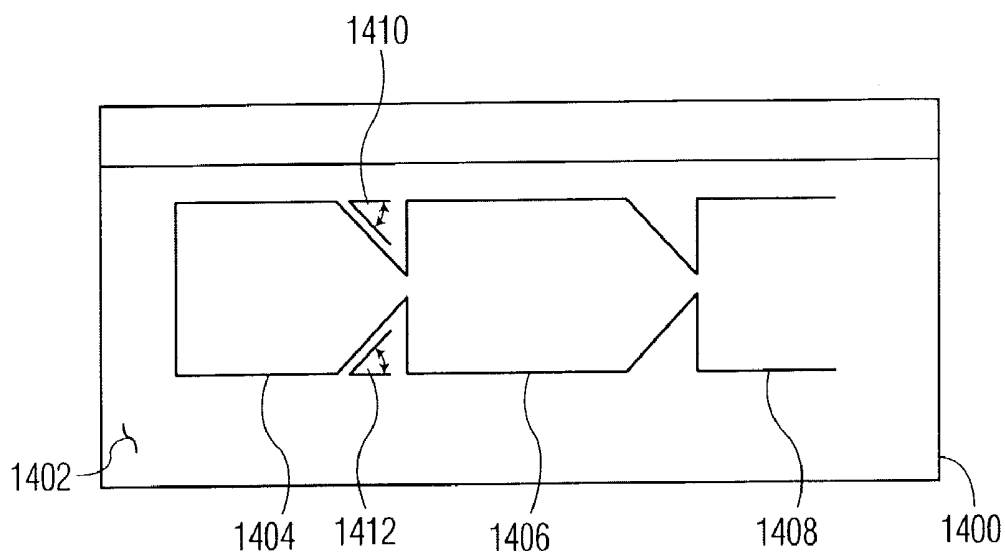


FIG. 17A

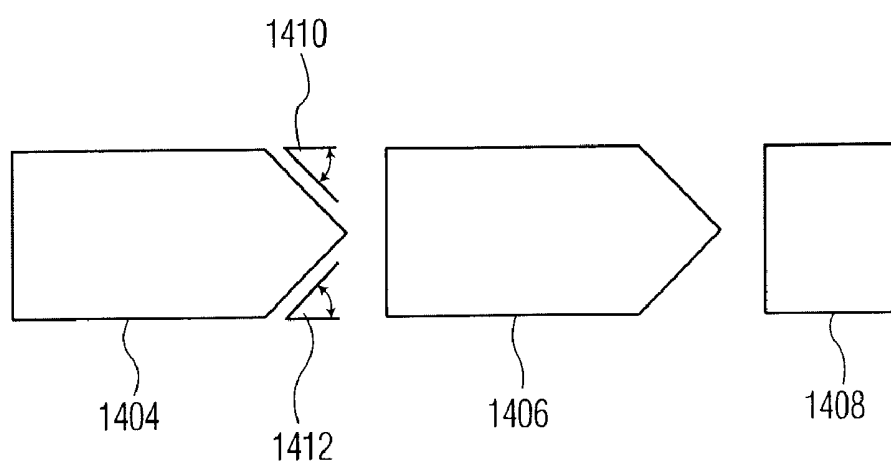


FIG. 17B

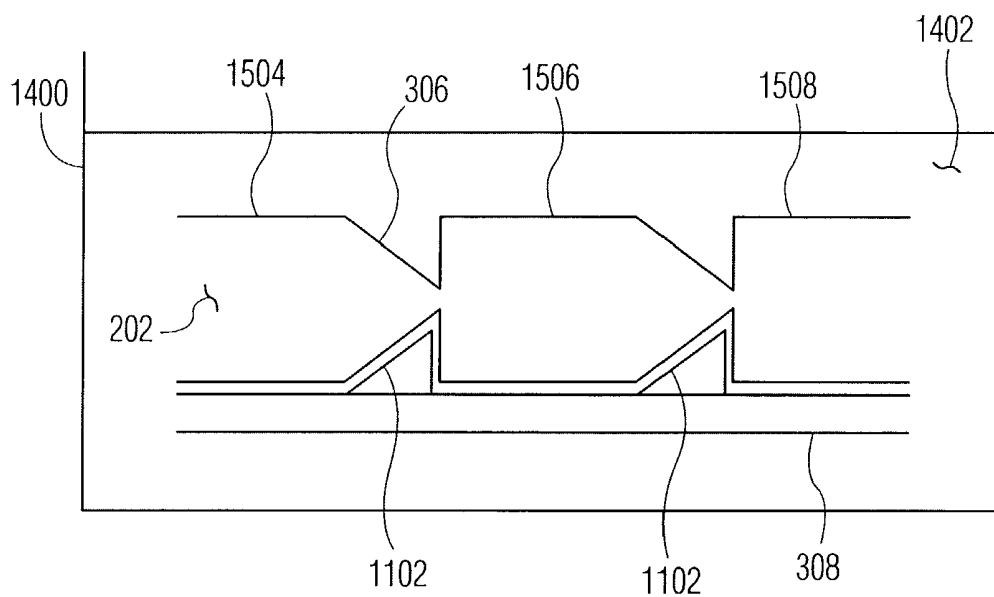


FIG. 18A

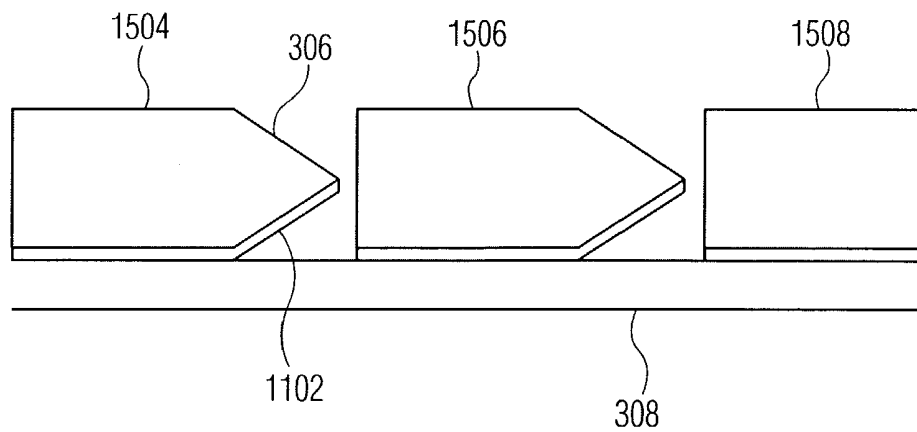


FIG. 18B

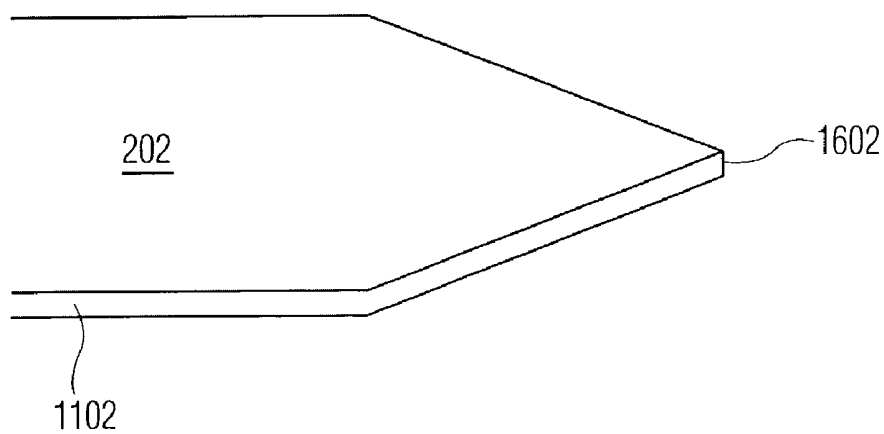


FIG. 19

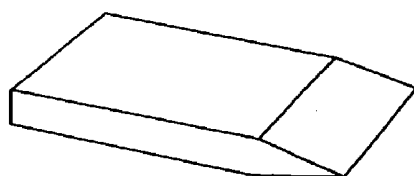


FIG. 20A




FIG. 20B



FIG. 20C



FIG. 20D




FIG. 20E

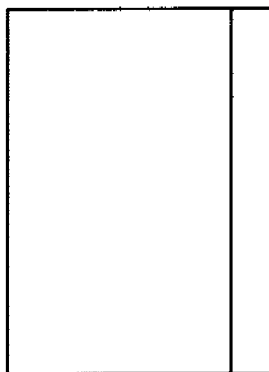
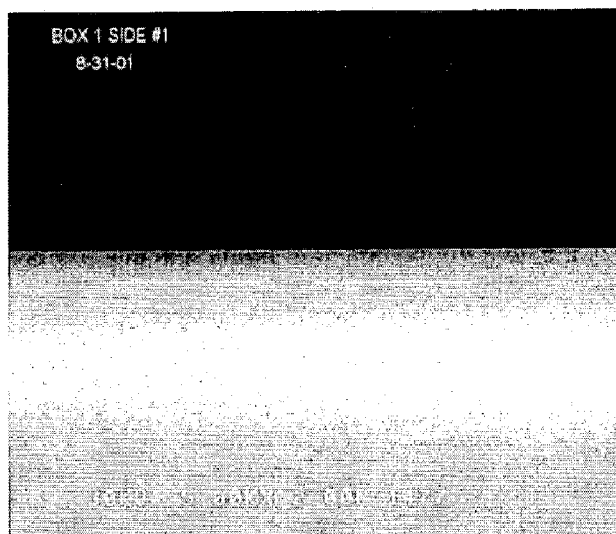


FIG. 20F

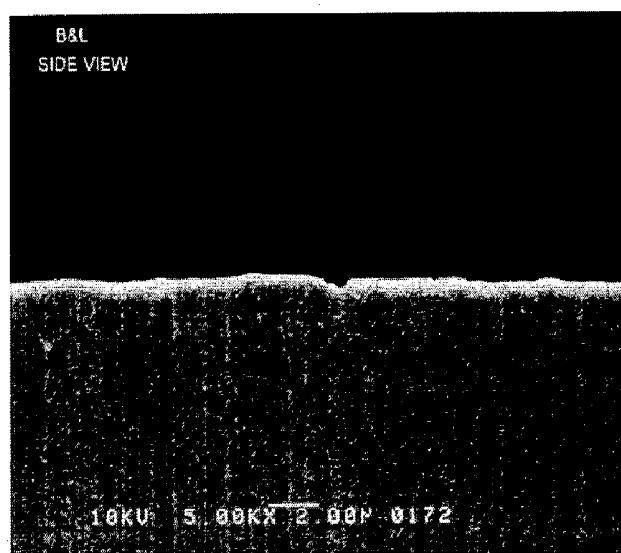


FIG. 20G



5000 X

FIG. 21A



5000 X

FIG. 21B

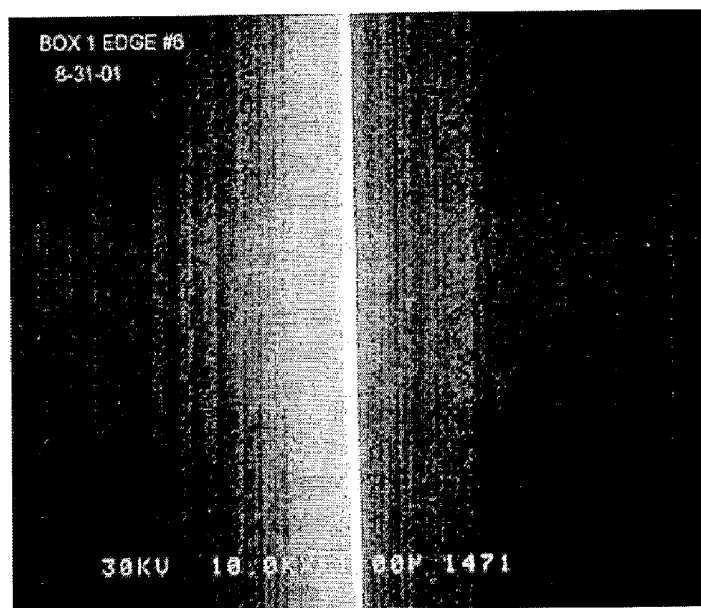


FIG. 22A

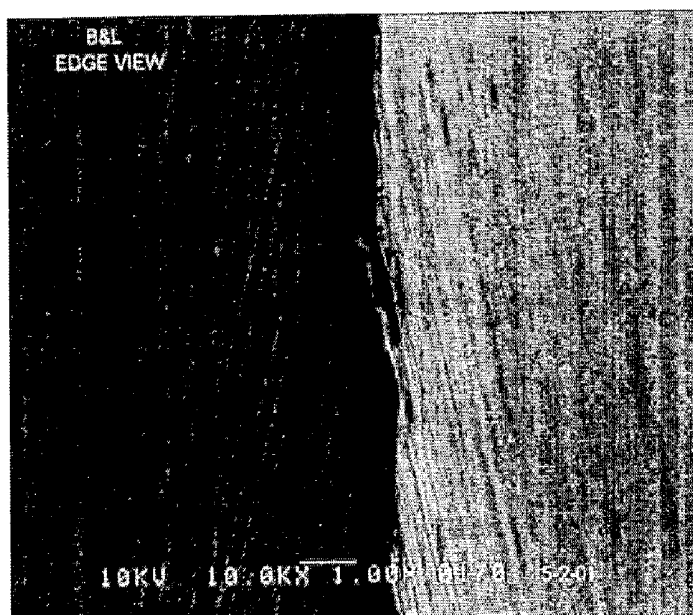


FIG. 22B

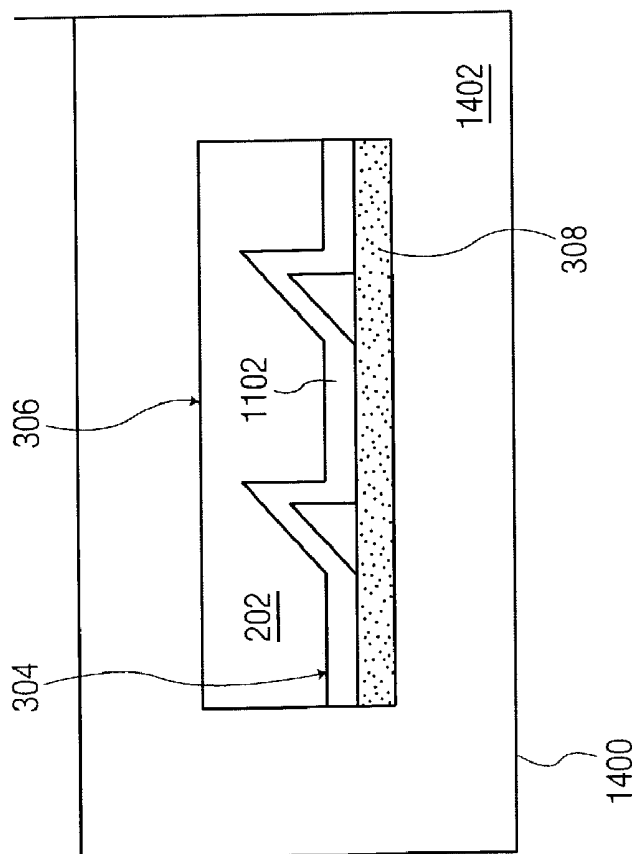


FIG. 23A

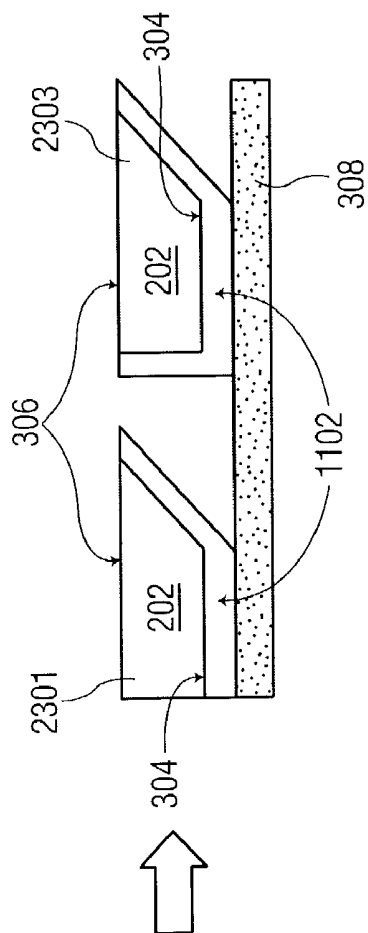


FIG. 23B

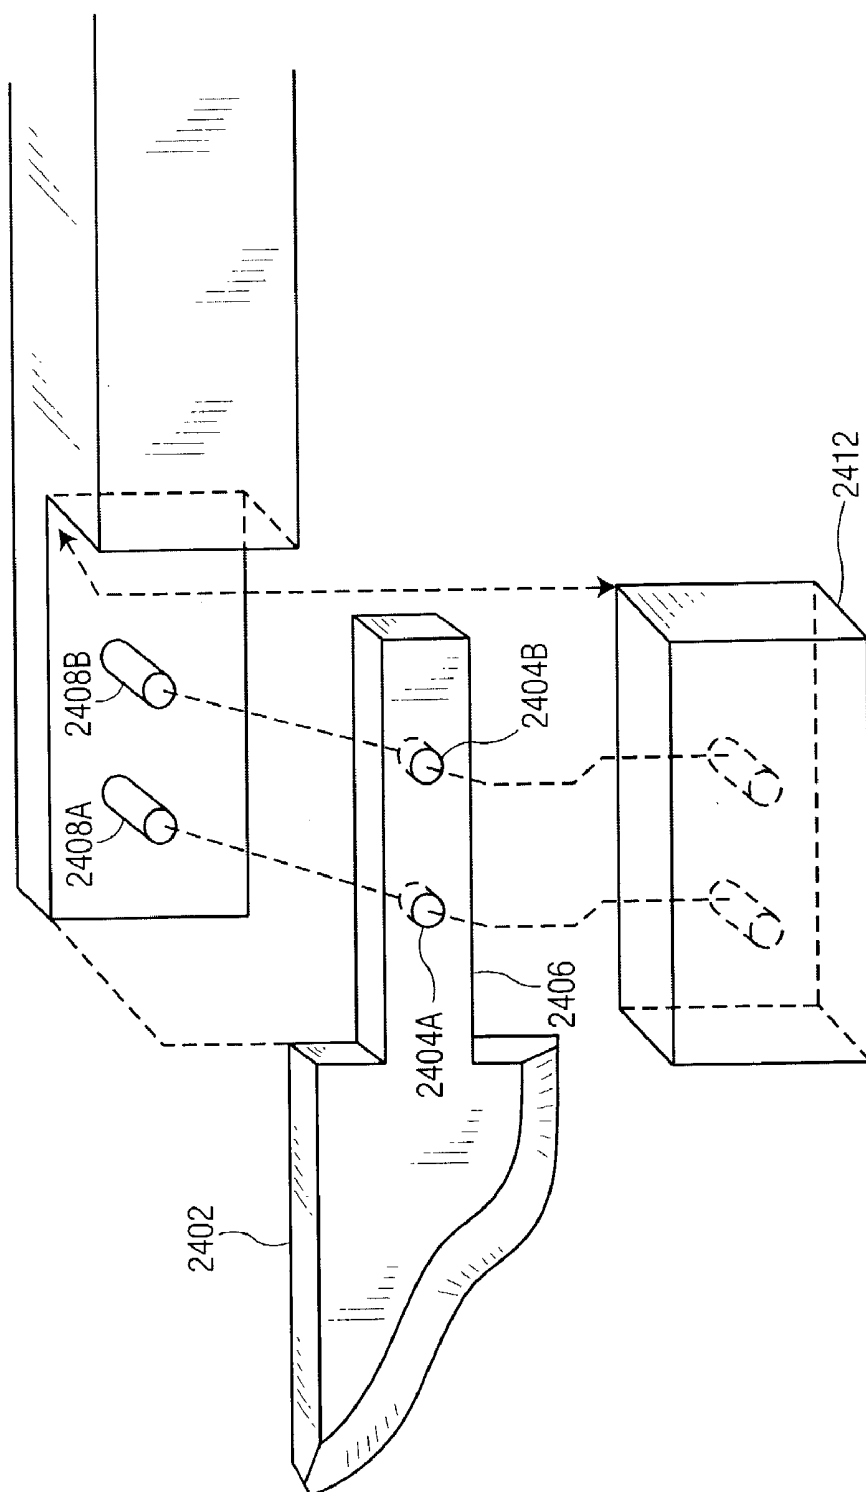


FIG. 24

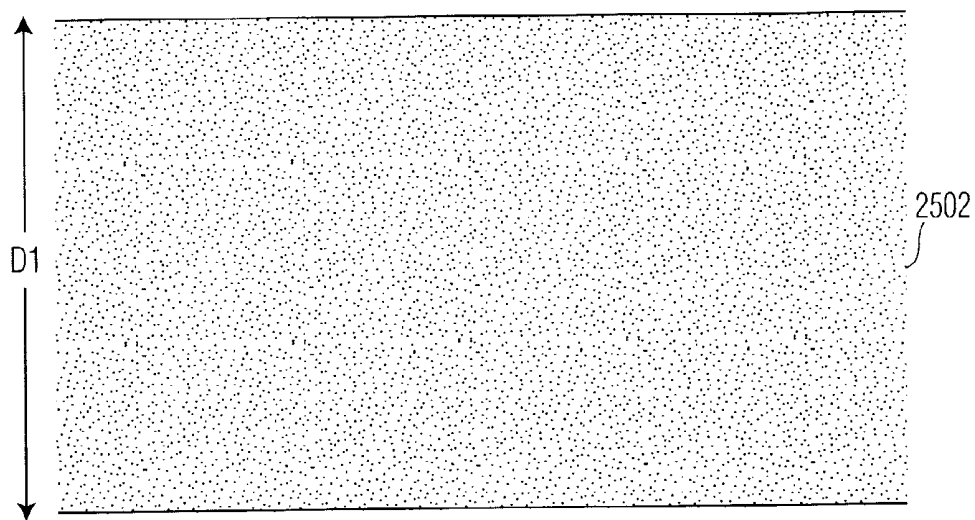


FIG. 25A

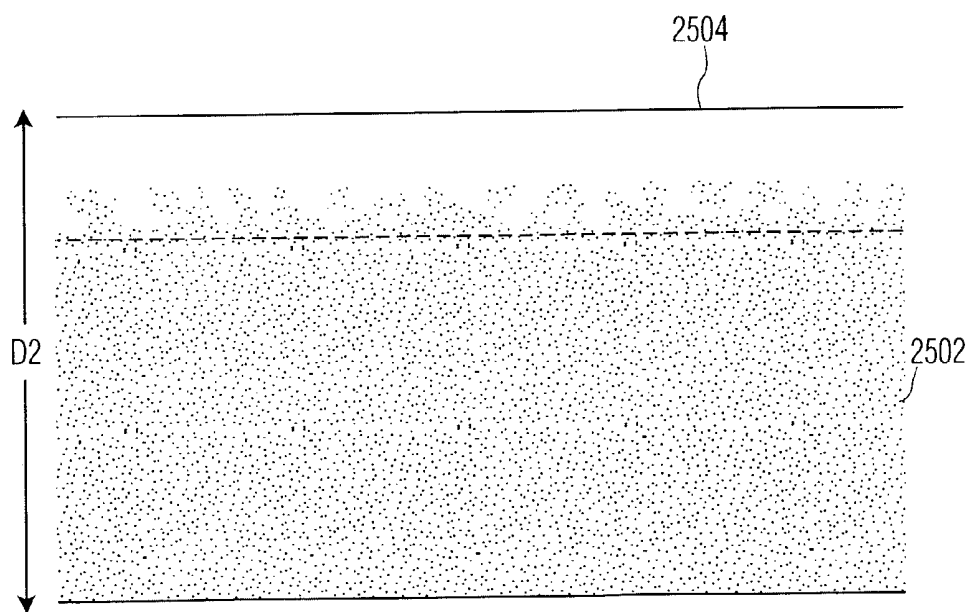


FIG. 25B

SYSTEM AND METHOD FOR THE MANUFACTURE OF SURGICAL BLADES

CROSS REFERENCE TO RELATED APPLICATIONS

[0001] Related subject matter is disclosed in two co-pending U.S. provisional patent applications, Serial No. 60/362,999, filed Mar. 11, 2002, and Serial No. 60/430,332, filed Dec. 3, 2002, the entire contents of which are expressly incorporated herein by reference.

FIELD OF THE INVENTION

[0002] The invention relates to a system and method for the manufacture of surgical instruments. More particularly, the invention relates to a system and method for the manufacture of surgical-quality blades manufactured from silicon and other crystalline materials.

BACKGROUND OF THE INVENTION

[0003] Existing surgical blades are manufactured via several different methodologies, each method having its own peculiar advantages and disadvantages. The most common method of manufacture is to mechanically grind stainless steel. The blade is subsequently honed (through a variety of different methods such as ultrasonic slurring, mechanical abrasion and lapping) or is electrochemically polished to achieve a sharp edge. The advantage of these methods is that they are proven, economical processes to make disposable blades in high volume. The greatest disadvantage of these processes is that the edge quality is variable, in that achieving superior sharpness consistency is still a challenge. This is primarily due to the inherent limitations of the process itself. Blade edge radii can range from 30 nm to 1000 nm.

[0004] A relatively new method of blade manufacture employs coining of the stainless steel in lieu of grinding. The blade is subsequently electrochemically polished to achieve a sharp edge. This process has been found to be more economical than the grinding method. It has also been found to produce blades with better sharpness consistency. The disadvantage of this method is that the sharpness consistency is still less than that achieved by the diamond blade manufacturing process. The use of metal blades in soft tissue surgery is prevalent today due to their disposable cost and their improved quality.

[0005] Diamond blades are the gold standard in sharpness in many surgical markets, especially in the ophthalmic surgery market. Diamond blades are known to be able to cleanly cut soft tissue with minimal tissue resistance. The use of diamond blades is also desired due to their consistent sharpness, cut after cut. Most high-volume surgeons will use diamond blades since the ultimate sharpness and sharpness variability of metal blades is inferior to that of diamond. The manufacturing process used to make diamond blades employs a lapping process to achieve an exquisitely sharp and consistent edge radius. The resultant blade edge radii range from 5 nm to 30 nm. The disadvantage of this process is that it is slow and as a direct result, the cost to manufacture such diamond blades ranges from \$500 to \$5000. Therefore, these blades are sold for reuse applications. This process is currently used on other, less hard materials, such as rubies and sapphires, to achieve the same sharpness at a lesser cost. However, while less expensive than diamonds, ruby and/or

sapphire surgical quality blades still suffer from the disadvantage that the cost of manufacture is relatively high, ranging from \$50 to \$500, and their edges only last through about two hundred cases. Therefore, these blades are sold for reuse and limited reuse applications.

[0006] There have been a few proposals for the manufacture of surgical blades using silicon. However, in one form or another, these processes are limited in their ability to manufacture blades in various configurations and at a disposable cost. Many of the silicon blade patents are based on anisotropic etching of silicon. The anisotropic etching process is one where the etching is highly directional, with different etch rates in different directions. This process can produce a sharp cutting edge. However, due to the nature of the process, it is limited by the blade shapes and included bevel angles that can be attained. Wet bulk anisotropic etching processes, such as those employing potassium hydroxide (KOH), ethylene-diamine/pycatechol (EDP) and trimethyl-2-hydroxyethylammonium hydroxide (TMAH) baths, etch along a particular crystalline plane to achieve a sharp edge. This plane, typically the (111) plane in silicon <100>, is angled 54.7° from the surface plane in the silicon wafers. This creates a blade with an included bevel angle of 54.7°, which has been found to be clinically unacceptable in most surgical applications as too obtuse. This application is even worse when this technique is applied to making double bevel blades, for the included bevel angle is 109.4°. The process is further limited to the blade profiles that it can produce. The etch planes are arranged 90° to each other in the wafer. Therefore, only blades with rectangular profiles can be produced.

[0007] Thus, a need exists to manufacture blades that address the shortcomings of the methods discussed above. This system and method of the present invention can make blades with the sharpness of diamond blades at the disposable cost of the stainless steel methods. In addition, the system and method of the present invention can produce blades in high volume and with tight process control.

SUMMARY OF THE INVENTION

[0008] The above described disadvantages are overcome and a number of advantages are realized by the present invention which relates to a system and method for the manufacturing of surgical blades from a crystalline or polycrystalline material, such as silicon, which provides for the machining of trenches in a crystalline or poly-crystalline wafer, by various means, at any desired bevel angle or blade configuration. The machined crystalline or poly-crystalline wafers are then immersed in an isotropic etching solution which uniformly removes layer after layer of molecules of the wafer material, in order to form a cutting edge of uniform radius, and of sufficient quality for soft tissue surgery applications. The system and method of the invention provides a very inexpensive means for the manufacture of such high quality surgical blades.

[0009] It is therefore an object of the invention to provide a method for manufacturing a surgical blade, comprising the steps of mounting a silicon or other crystalline or polycrystalline wafer on a mounting assembly, machining one or more trenches on a first side of the crystalline or polycrystalline wafer, etching the first side of the crystalline or polycrystalline wafer to form one or more surgical blades, singulating the surgical blades, and assembling the surgical blades.

[0010] It is a further object of the invention to provide a method for manufacturing a surgical blade, comprising the steps of mounting a crystalline or poly-crystalline wafer on a mounting assembly, machining one or more trenches on a first side of the crystalline or poly-crystalline wafer, coating the first side of the crystalline or poly-crystalline wafer with a coating, dismounting the crystalline or poly-crystalline wafer from the mounting assembly, and remounting the first side of the crystalline or poly-crystalline wafer on the mounting assembly, machining a second side of the crystalline or poly-crystalline wafer, etching the second side of the crystalline or poly-crystalline wafer to form one or more surgical blades, singulating the surgical blades, and assembling the surgical blades.

[0011] It is still a further object of the invention to provide a method for manufacturing a surgical blade, comprising the steps of mounting a crystalline or poly-crystalline wafer on a mounting assembly, machining one or more trenches on a first side of the crystalline or poly-crystalline wafer, dismounting the crystalline or poly-crystalline wafer from the mounting assembly, and remounting the first side of the crystalline or poly-crystalline wafer on the mounting assembly, machining a second side of the crystalline or poly-crystalline wafer, etching the second side of the crystalline or poly-crystalline wafer to form one or more surgical blades, converting a layer of the crystalline or poly-crystalline material to form a hardened surface, singulating the surgical blades, and assembling the surgical blades.

BRIEF DESCRIPTION OF THE DRAWINGS

[0012] The novel features and advantages of the present invention will best be understood by reference to the detailed description of the preferred embodiments which follows, when read in conjunction with the accompanying drawings, in which:

[0013] FIG. 1 illustrates a flow diagram of a method for manufacturing a double bevel surgical blade from silicon according to a first embodiment of the present invention;

[0014] FIG. 2 illustrates a flow diagram of a method for manufacturing a single bevel surgical blade from silicon according to a second embodiment of the present invention;

[0015] FIG. 3 illustrates a flow diagram of an alternative method for manufacturing a single bevel surgical blade from silicon according to a third embodiment of the present invention;

[0016] FIG. 4 illustrates a silicon wafer mounted on a mounting assembly, top view;

[0017] FIG. 5 illustrates a silicon wafer mounted on a mounting assembly with tape, side view;

[0018] FIG. 6 illustrates the use of a laser waterjet for pre-cutting a silicon wafer to assist in the machining of trenches in the silicon wafer according to an embodiment of the present invention;

[0019] FIGS. 7A-7D illustrate dicing saw blade configurations used to machine trenches in a silicon wafer according to an embodiment of the present invention;

[0020] FIG. 8 illustrates the operation of a dicing saw blade through a silicon wafer mounted on support backing according to an embodiment of the present invention;

[0021] FIGS. 8A-8C illustrate a use of slots when machining trenches in a silicon wafer with a dicing saw blade according to an embodiment of the invention;

[0022] FIG. 9 illustrates a cross-section view of a dicing saw blade machining a trench in a silicon wafer that is tape mounted according to an embodiment of the present invention;

[0023] FIGS. 10A and 10B illustrate a silicon surgical blade with a single bevel cutting edge and a silicon surgical blade with a double bevel cutting edge respectively, made in accordance with an embodiment of the present invention;

[0024] FIG. 11 illustrates a block diagram of a laser system used to machine trenches in a silicon wafer according to an embodiment of the present invention;

[0025] FIG. 12 illustrates a block diagram of an ultrasonic machining system used to machine trenches in a silicon wafer according to an embodiment of the present invention;

[0026] FIG. 13 illustrates a diagram of a hot-forging system used to form trenches in a silicon wafer according to an embodiment of the present invention;

[0027] FIG. 14 illustrates a silicon wafer with a single machined trench with a coating applied to the machined side according to an embodiment of the present invention;

[0028] FIG. 15 illustrates a cross-section view of a dicing saw blade machining a second trench in a silicon wafer that is tape mounted according to an embodiment of the present invention;

[0029] FIG. 16 illustrates a cross-section image of a silicon wafer that has been machined trenched on both sides according to an embodiment of the present invention;

[0030] FIGS. 17A and 17B illustrate an isotropic etching process performed on a silicon wafer with machined trenches on both sides according to an embodiment of the present invention;

[0031] FIGS. 18A and 18B illustrate an isotropic etching process on a silicon wafer with machined trenches on both sides, and a coating layer on one side according to an embodiment of the present invention;

[0032] FIG. 19 illustrates a resultant cutting edge of a double bevel silicon surgical blade with a coating on one side manufactured according to an embodiment of the present invention;

[0033] FIGS. 20A-20G illustrate various examples of surgical blades that can be manufactured in accordance with the method of the present invention;

[0034] FIGS. 21A and 21B illustrate a side view of the blade edge of a silicon surgical blade manufactured in accordance with an embodiment of the present invention, and a stainless steel surgical blade, at 5,000× magnification, respectively;

[0035] FIGS. 22A and 22B illustrate a top view of the blade edge of a silicon surgical blade manufactured in accordance with an embodiment of the present invention, and a stainless steel blade, at 10,000× magnification, respectively;

[0036] FIGS. 23A and 23B illustrate an isotropic etching process on a silicon wafer with a machined trench on one

side, and a coating layer on an opposite side according to a further embodiment of the present invention;

[0037] FIG. 24 illustrates a post-slot assembly of a handle and a surgical blade manufactured in accordance with an embodiment of the invention; and

[0038] FIGS. 25A and 25B illustrate profile perspectives of a blade edge made of a crystalline material, and a blade edge made of a crystalline material that includes a layer conversion process in accordance with an embodiment of the invention.

DETAILED DESCRIPTION OF THE PREFERRED EMBODIMENTS

[0039] The various features of the preferred embodiments will now be described with reference to the drawing figures, in which like parts are identified with the same reference characters. The following description of the presently contemplated best mode of practicing the invention is not to be taken in a limiting sense, but is provided merely for the purpose of describing the general principles of the invention.

[0040] The system and method of the present invention provides for the manufacture of surgical blades to be used for incising soft tissue. Although the preferred embodiment is shown to be a surgical blade, numerous cutting devices can also be fabricated in accordance with the methods discussed in detail below. Therefore, it will be apparent to one skilled in the art of the invention that although reference is made to "surgical blades" throughout these discussions, numerous other types of cutting devices can be fabricated, including, for example, medical razors, lancets, hypodermic needles, sample collection cannula and other medical sharps.

[0041] The preferred base material that the blades will be manufactured from is crystalline silicon with a preferred crystal orientation. However, other orientations of silicon are suitable, as well as other materials that can be isotropically etched. For example, silicon wafers with orientation $\langle 110 \rangle$ and $\langle 111 \rangle$ can also be used, as well as silicon wafers doped at various resistivity and oxygen content levels. Also, wafers made of other materials can be used, such as silicon nitride and gallium arsenide. Wafer form is the preferred format for the base material. In addition to crystalline materials, poly-crystalline materials can also be used to manufacture surgical blades. Examples of these poly-crystalline materials include polycrystalline silicon. It will be understood that the term "crystalline" as used herein will be used to refer to both crystalline and poly-crystalline materials.

[0042] Therefore, it will be apparent to one skilled in the art of the invention that although reference is made to "silicon wafers" throughout these discussions, any of the aforementioned materials in combination with various orientations can be used in accordance with the various embodiments of the present invention, as well as other suitable materials and orientations that might become available.

[0043] FIG. 1 illustrates a flow diagram of a method for manufacturing a double bevel surgical blade from silicon according to a first embodiment of the present invention. The method of FIGS. 1, 2 and 3 describe generally processes which can be used to manufacture silicon surgical blades according to the present invention. However, the

order of the steps of the method illustrated in FIGS. 1, 2 and 3 can be varied to create silicon surgical blades of different criteria, or to meet different manufacturing environments. As such, the method of FIGS. 1, 2 and 3 are meant to be representative of general embodiments of the method according to the present invention, in that there are many different permutations which include the same steps that can result in a manufactured silicon surgical blade in accordance with the spirit and scope of the present invention.

[0044] The method of FIG. 1 is used to manufacture a double bevel surgical blade, preferably with a crystalline material such as silicon, in accordance with an embodiment of the invention, and begins with step 1002. In step 1002, the silicon wafer is mounted on mounting assembly 204. In FIG. 4, the silicon wafer 202 is shown mounted on a wafer frame/UV tape assembly (mounting assembly) 204. The mounting assembly 204 is a common method to handle silicon wafer material in the semiconductor industry. One skilled in the art can appreciate that mounting the silicon (crystalline) wafer 202 upon a wafer mounting assembly 204 is not necessary for the manufacture of surgical blades according to the preferred embodiments of the invention.

[0045] FIG. 5 illustrates the same silicon wafer 202 mounted on the same mounting assembly 204 but in a side view (left or right; it is symmetrical, though that need not be the case). In FIG. 5, silicon wafer 202 is mounted on tape 308 which is then mounted on mounting assembly 204. Silicon wafer 202 has a first side 304 and a second side 306.

[0046] Referring again to FIG. 1, decision step 1004 follows step 1002. Decision step 1004 determines whether an optional pre-cut is to be made in silicon wafer 202, in step 1006, if so desired. This pre-cut can be performed by a laser waterjet 402, as shown in FIG. 6. In FIG. 6, laser waterjet 402 is shown directing laser beam 404 onto silicon wafer 202, which is mounted on mounting assembly 204. As can be seen in FIG. 6, various pre-cut holes (or through-hole fiducials) 406 can be created in silicon wafer 202 as a result of the impact of the laser beam 404 with silicon wafer 202.

[0047] Silicon wafer 202 is ablated by the laser beam 404 upon silicon wafer 202. The ability of the laser beam 404 to ablate the silicon wafer 202 is related to the laser's wavelength λ . In the preferred embodiment, which uses a silicon wafer, the wavelength that yields the best results is 1064 nano-meters, typically provided by a YAG laser, though other types of lasers can be used as well. If a different crystalline or poly-crystalline material is used, then other wavelengths and laser types will be more appropriate.

[0048] The resultant through-hole fiducials 406 (a plurality of holes can be cut in this manner) can be used as guides for machining trenches (discussed in detail with respect to step 1008 below), especially if a dicing saw blade is to be used to machine the trenches. Through-hole fiducials 406 can also be cut by any laser beam (e.g., an excimer laser or laser waterjet 402) for the same purpose. The pre-cut through-hole fiducials are typically cut in the shape of a plus "+" or a circle. However, the choice of through-hole fiducial shape is directed by the specific manufacturing tools and environment, and thus need not be limited to just the two aforementioned shapes.

[0049] In addition to the use of a laser beam to pre-cut through-hole fiducials, other mechanical machining meth-

ods can also be used. These include, for example, but are not limited to, drilling tools, mechanical grinding tools and an ultra-sonic machining tool **100**. While use of the devices is novel with respect to the preferred embodiments of the invention, the devices and their general use are well known to those skilled in the art.

[0050] Precutting can be performed to silicon wafer **202** prior to machining trenches in order for silicon wafer **202** to maintain its integrity and not fall apart during the etching process. A laser beam (e.g., a laser waterjet **402** or excimer laser) can be used to scroll in elliptical through-hole slots for the dicing blade **502** (discussed in detail in reference to FIGS. 7A-7C) to begin machining trenches in silicon wafer **202** within its perimeter. The mechanical machining devices and methods (discussed above) used to create the through-hole fiducials can also be used to create the through-hole slots as well.

[0051] Referring again to FIG. 1, the next step is step **1008**, which can follow either step **1006** (if through-hole fiducials **406** are cut into silicon wafer **202**), or steps **1002** and **1004**, which is the silicon wafer mounting step ("step" **1004** is not a physical manufacturing step; these decision steps are included to illustrate the total manufacturing process and its variances). In step **1008**, trenches are machined into first side **304** of silicon wafer **202**. There are several methods that can be used to machine the trenches, dependent on manufacturing conditions and the desired design of the finished silicon surgical blade product.

[0052] The methods for machining can employ either a dicing saw blade, laser system, an ultrasonic machining tool or a hot-forging process. Other methods for machining can also be used. Each will be discussed in turn. The trench that is machined by any of these methods provides the angle (bevel angle) of the surgical blade. As the trench machine operates on silicon wafer **202**, silicon material is removed, either in the shape of the dicing saw blade, the pattern formed by the excimer laser, or the pattern formed by an ultrasonic machining tool, in the desired shape of the surgical blade preform. In the case of a dicing saw blade, the silicon surgical blades will have only straight edges; in the latter two methods, the blades can be essentially any shape desired. In the case of a hot-forging process, the silicon wafer is heated to make it malleable, then pressed between two die, each one having a three dimensional form of the desired trenches to be "molded" into the heated, malleable silicon wafer. For purposes of this discussion, "machining" trenches encompasses all methods of manufacturing trenches in a silicon wafer, including those mentioned specifically, whether by a dicing saw blade, excimer laser, ultrasonic machine or a hot-forging process, and equivalent methods not mentioned. These methods of machining the trenches will now be discussed in detail.

[0053] FIGS. 7A-7D illustrate dicing saw blade configurations used to machine trenches in a silicon wafer according to an embodiment of the invention. In FIG. 7A, first dicing saw blade **502** exhibits angle Φ which will essentially be the resulting angle of the surgical blade after the entire manufacturing process has been completed. FIG. 7B illustrates second dicing saw blade **504**, with two angled cutting surfaces, each exhibiting a cutting angle Φ . FIG. 7C illustrates third dicing saw blade **506** which also has cutting angle Φ , but has a slightly different configuration than that

of first dicing saw blade **502**. FIG. 7D illustrates a fourth dicing saw blade **508** with two angled cutting surfaces, similar to FIG. 7B, each exhibiting a cutting angle Φ .

[0054] Although each of the dicing saw blades **502**, **504**, **506** and **508** illustrated in FIGS. 7A-7D have the same cutting angle Φ , it will be apparent to one skilled in the art that the cutting angle can be different for different uses of the silicon based surgical blades. In addition, as will be discussed below, a single silicon surgical blade can have different cutting edges with different angles included therein. Second dicing saw blade **504** can be used to increase the manufacturing capacity for a particular design of a silicon based surgical blade, or, produce silicon surgical blades that have two or three cutting edges. Various examples of blade designs will be discussed in detail in reference to FIGS. 20A-20G. In a preferred embodiment of the invention, the dicing saw blade will be a diamond grit saw blade.

[0055] A special dicing saw blade is used to machine channels in the first side **304** of the silicon wafer **202**. The dicing saw blade composition is specifically chosen to provide the best resultant surface finish while maintaining acceptable wear life. The edge of the dicing saw blade is shaped with a profile that will shape the resultant channel in silicon wafer **202**. This shape will correlate to the resultant blade bevel configuration. For instance, surgical blades typically have included bevel angles that range from 15° to 45° for single bevel blades and half included bevel angles that range from 15° to 45° for double bevel blades. Selection of a dicing saw blade in conjunction with etch conditions provides precise control of bevel angle.

[0056] FIG. 8 illustrates the operation of a dicing saw blade through a silicon wafer mounted on support backing according to an embodiment of the invention. FIG. 8 illustrates the operation of a dicing saw blade machine that is machining trenches in first side **304** of silicon wafer **202**. In this example, any of the dicing saw blades of FIGS. 7A-7D (**502**, **504**, **506** or **508**) can be used to create the silicon based surgical blade edges. It should also be understood that the blade configurations of FIGS. 7A-7D are not the only possible configurations that can be created for dicing saw blades. FIG. 9 illustrates a cross section view of a dicing saw blade machining a trench in a silicon wafer that is tape mounted according to an embodiment of the invention. FIG. 9 illustrates a close up cross section view of the same dicing saw blade assembly shown in FIG. 8 actually penetrating silicon wafer **202**. It can be seen that dicing saw blade **502** does not penetrate all the way through silicon wafer **202**, but, for a single bevel cut, penetrates approximately 50-90% of the thickness of silicon wafer **202**. This applies to any method used for machining (or molding, via hot-forging) a single bevel trench. For a double bevel cut by any dicing saw blade, or, any of the machining methods, approximately 25-49% of the thickness of silicon wafer **202** will be machined away (or molded) on each side of silicon wafer **202**. FIGS. 10A and 10B illustrate a silicon surgical blade with a single bevel cutting edge and a silicon surgical blade with a double bevel cutting edge respectively, made in accordance with an embodiment of the invention.

[0057] As discussed above, slots can also be cut into the silicon wafer **202**, especially if a dicing saw blade will be used to machine the trenches. Slots can be cut into the silicon

wafer **202** in a fashion similar to the through-hole fiducials, i.e., with the laser water-jet or excimer laser, but serve a very different purpose. Recall that the through-hole fiducials are used by the trench machine in order to accurately position the silicon wafer **202** on the trench machine. This is especially useful when making double bevel blades, because the second machining (on the opposite side of the silicon wafer **202**) must be accurately positioned to ensure a properly manufactured double bevel blade. Slots, however, are used for a different purpose. Slots allow the dicing saw blade to begin cutting the silicon wafer **202** away from the edge (as shown in **FIG. 8**), without splintering or breaking the silicon wafer **202**. This is the preferred embodiment, as is shown in **FIG. 8A**. Referring to **FIG. 8**, it is apparent that if slots are not used, and the trenches are machined as shown, the machined silicon wafer **202** will be susceptible to breakage along the machined trenches because the silicon wafer is significantly thinner in those areas, and small stresses can cause it to break. That is, the machined silicon wafer of **FIG. 8** lacks structural rigidity. Compare this to the silicon wafer of **FIG. 8C**. The machined silicon wafer **202** of **FIG. 8C** is much more rigid and leads to improved manufacturing throughput. Fewer silicon wafers **202** machined according to **FIG. 8C** will break than those of **FIG. 8**. As shown in **FIGS. 8A and 8B**, the slot is made wider than the dicing saw blade, and long enough to allow the dicing saw blade to be inserted into it to begin machining at the proper depth. Therefore, the dicing saw blade does not attempt to cut the silicon wafer **202** while it is moving downward, which causes splintering and breakage; the dicing saw blade begins to cut when it is moving in an horizontal manner, as it was designed to do. **FIG. 8C** illustrates a series of slots and machined trenches in a first side of a silicon wafer **202**.

[0058] **FIG. 11** illustrates a block diagram of a laser system used to machine trenches in a silicon wafer according to an embodiment of the invention. The trenches can also be ultrasonically machined as described in reference to **FIG. 12**, discussed in detail below. The advantage of these two methods is that blades can be manufactured with non-linear and complex cutting edge profiles, e.g. crescent blades, spoon blades, and scleratomy blades. **FIG. 11** illustrates a simplified laser machine assembly **900**. The laser machine assembly **900** is comprised of a laser **902**, which emits a laser beam **904**, and a multi-axis control mechanism **906** which rests on base **908**. Of course, the laser machine assembly **900** can also comprise a computer, and possibly a network interface, which have been omitted for clarity.

[0059] When machining trenches with the laser machine assembly **900**, the silicon wafer **202** is mounted on the mounting assembly **204** which also is adaptable to be manipulated by multi-axis control mechanism **906**. Through the use of laser machining assembly **900** and various light beam masking techniques, an array of blade profiles can be machined. The light beam mask is located inside laser **902**, and through careful design, prevents laser **902** from ablating silicon material where it is not intended. For double bevel blades, the opposing side is machined the same way using the pre-cut chamfers **206A**, **206B** or fiducials **406** for alignment.

[0060] Laser **902** is used to accurately and precisely machine trench patterns (also referred to as an "ablation profile" in reference to use of a laser) into either first side **304** or second side **306** of silicon wafer **202** in preparation

of the wet isotropic etching step (which is discussed in detail with reference to **FIG. 1**, step **1018**). Multi-axis control and the use of internal laser light beam masks are used to raster the aforementioned ablation profiles in silicon wafer **202**. As a result, a contoured trench is achieved that has shallow angled slopes that correspond to that which is required for the surgical blade product. Various curvilinear profile patterns can be achieved via this process. There are several types of lasers that can be used in this machining step. For example, an excimer laser or laser waterjet **402** can be used. The wavelength of the excimer laser **902** can range between 157 nm and 248 nm. Other examples include a YAG laser and lasers with a wavelength of 355 nanometers. Of course, one skilled in the art can appreciate that laser beams with certain wavelengths within the range of 150 nm to 11,000 nm can be used to machine trench patterns.

[0061] **FIG. 12** illustrates a block diagram of an ultrasonic machining system used to machine trenches in a silicon wafer according to an embodiment of the present invention. Ultrasonic machining is performed by using a precisely machined ultrasonic tool **104** that is then used to machine, with abrasive slurry **102**, first side **304** or second side **306** of silicon wafer **202**. The machining is done to one side at a time. For double bevel blades, the opposing side is machined the same way using the through-hole fiducials **406** for alignment.

[0062] Ultrasonic machining is used to accurately and precisely machine trench patterns into the silicon wafer **202** surface in preparation for the wet isotropic etching step. Ultrasonic machining is performed by ultrasonically vibrating a mandrel/tool (tool) **104**. Tool **104** does not come in contact with silicon wafer **202**, but is in close proximity to silicon wafer **202** and excites abrasive slurry **102** by operation of ultrasonic waves emitted by tool **104**. The ultrasonic waves emitted by tool **104** force abrasive slurry **102** to erode silicon wafer **202** to the corresponding pattern that is machined on tool **104**.

[0063] Tool **104** is machined, via milling, grinding or electrostatic discharge machining (EDM), to create the trench pattern. The resultant pattern on the machined silicon wafer **202** corresponds to that which was machined on tool **104**. The advantage of using an ultrasonic machining method over an excimer laser is that an entire side of silicon wafer **202** can have numerous blade trench patterns ultrasonically machined at the same time. Thus, the process is fast and relatively inexpensive. Also, like the excimer laser machining process, various curvilinear profile patterns can be achieved via this process.

[0064] **FIG. 13** illustrates a diagram of a hot-forging system used to form trenches in a silicon wafer according to an embodiment of the invention. The trench configurations can also be hot forged into the wafer surface. This process employs heating the wafer to a malleable condition. The wafer surfaces are subsequently pressed between two die that incorporate the negative pattern to that of the resultant trenches.

[0065] Silicon wafer **202** is pre-heated in a heat chamber, or can be heated completely by operation of heated base member **1054**, upon which silicon wafer **202** sits. After sufficient time at elevated temperatures has passed, silicon wafer **202** will become malleable. Then, heated die **1052** is forced down upon silicon wafer **202** with sufficient pressure

to impress the negative image of heated die 1052 into first side 304 of silicon wafer 202. The design of die 1052 can be such that there are numerous trenches of various bevel angles, depths, lengths and profiles, in order to create virtually any blade design imaginable. The diagram illustrated in FIG. 13 is greatly simplified and exaggerated to clearly show the pertinent features of the hot-forging process.

[0066] Having discussed the several methods for machining trenches, attention is again redirected to FIG. 1. Following step 1008, in which the trenches are machined into first side 304 of silicon wafer 202, a decision must be made, in decision step 2001, as to whether to coat the silicon wafer 202. FIG. 14 illustrates a silicon wafer with a single machined trench with a coating applied to the machined side, according to an embodiment of the present invention. If a coating is to be applied, then coating 1102 can be applied to first side 304 of silicon wafer 202 in step 2002 according to one of many techniques known to those skilled in the art of the invention. Coating 1102 is supplied to facilitate etching control and to provide additional strength to the resultant blade edge. Silicon wafer 202 is placed in a deposition chamber where the entire first side 304 of silicon wafer 202—including the flat area and the trenched area—is coated with a thin layer of silicon nitride (Si_3N_4). The resultant coating 1102 thickness can range from 10 nm to 2 microns. The coating 1102 can be comprised of any material that is harder than the silicon (crystalline) wafer 202. Specifically, coating 1102 can also be comprised of titanium nitride (TiN), aluminum titanium nitride (AlTiN), silicon dioxide (SiO_2), silicon carbide (SiC), titanium carbide (TiC), boron nitride (BN) or diamond-like-crystals (DLC). Coatings for double bevel surgical blades will be discussed again in greater detail below, in reference to FIGS. 18A and 18B.

[0067] After coating 1102 has been applied in optional step 2002, the next step is step 2003, dismounting and remounting (step 2003 can also follow step 1008 if no coating was applied). In step 2003, silicon wafer 202 is dismounted from tape 308 utilizing the same standard mounting machine. The machine dismounts silicon wafer 202 by radiating ultra-violet (UV) light onto the UV sensitive tape 308 to reduce its tackiness. Low tack or heat release tape can also be used in lieu of UV sensitive tape 308. After sufficient UV light exposure, silicon wafer 202 can be easily lifted from the tape mounting. Silicon wafer 202 is then remounted, with second side 306 facing up, in preparation for machine trenching of second side 306.

[0068] Step 2004 is then performed on silicon wafer 202. In step 2004, trenches are machined into second side 306 of silicon wafer 202, as was done in step 1006, in order to create double bevel silicon based surgical blades. FIG. 15 illustrates a cross-section view of a dicing saw blade 502 machining a second trench in silicon wafer 202 that is tape mounted, according to an embodiment of the invention. Of course, excimer laser 902, ultrasonic machine tool 100 or the hot-forging process can also be used to machine the second trench in silicon wafer 202. In FIG. 15, dicing saw blade 502 is shown machining a second trench onto second side 306 of silicon wafer 202. Coating 1102 is shown having been optionally applied in step 2002. FIGS. 10A and 10B show the resulting single and double bevel cuts respectively. In FIG. 10A a single cut has been made on the silicon wafer 202 resulting in cutting angle Φ in a single blade assembly.

In FIG. 10B, a second trench has been machined into silicon wafer 202 (by any of the aforementioned trench machining processes) with the same angle as the first trench. The result is a double bevel silicon based surgical blade, with each cutting edge exhibiting a cutting angle of Φ , yielding a double bevel angle of 2Φ . FIG. 16 illustrates a cross-section image of a silicon wafer that has been machined trenched on both sides, according to an embodiment of the invention.

[0069] Following machine trench step 2004, a decision must be made in decision step 2005, as to whether to etch the double machine trenched silicon wafer 202 in step 1018, or dice the double machine trenched silicon wafer 202 in step 1016. Dicing step 1016 can be performed by a dicing saw blade, laser beam (e.g., an excimer laser, or laser waterjet 402). Dicing provides for the resultant strips to be etched (in step 1018) in custom fixtures in lieu of wafer boats (discussed in detail below).

[0070] FIGS. 17A and 17B illustrate an isotropic etching process performed on a silicon wafer with machined trenches on both sides, according to an embodiment of the present invention. In etching step 1018, the machined silicon wafer 202 is dismounted from tape 308. Silicon wafer 202 is then placed in a wafer boat and immersed in an isotropic acid bath 1400. The etchant's 1402 temperature, concentration and agitation are controlled to maximize the uniformity of the etch process. The preferred isotropic etchant 1402 used is comprised of hydrofluoric acid, nitric acid, and acetic acid (HNA). Other combinations and concentrations can be used to achieve the same purpose. For example, water can be exchanged for the acetic acid. Spray etching, isotropic xenon difluoride gas etching, and electrolytic etching, in lieu of immersion etching, can also be used to achieve the same results. Another example of a compound that can be used in gas etching is sulfur hexafluoride, or other similar fluorinated gases.

[0071] The etching process will uniformly etch both sides of silicon wafer 202 and its respective trenches until the opposing trench profiles intersect. Silicon wafer 202 will be immediately removed from etchant 1402 and rinsed once this occurs. The expected cutting edge radius attained by this process ranges from 5 nm to 500 nm.

[0072] Isotropic chemical etching is a process that is used to remove silicon in a uniform manner. In the manufacturing process according to an embodiment of the present invention, the wafer surface profile that was produced with the machining described above is uniformly brought down to intersect with the profile on the opposing side of the wafer (if single bevel blades are desired, the non-machined opposing silicon wafer surface will be intersected). Isotropic etching is used in order to achieve the desired blade sharpness while preserving the blade angle. Attempts to intersect the wafer profiles by machining alone fail because the desired edge geometry is too delicate to withstand the machining mechanical and thermal forces. Each of the acidic components of isotropic etchant (etchant) 1402 has a specific function in isotropic acid bath 1400. First, nitric acid oxidizes the exposed silicon, and secondly, hydrofluoric acid removes the oxidized silicon. Acetic acid acts as a diluent during this process. Precise control of composition, temperature and agitation is necessary to achieve repeatable results.

[0073] In FIG. 17A silicon wafer 202, with no coating 1102, has been placed in isotropic etch bath 1400. Note that

each surgical blade, first surgical blade **1404**, second surgical blade **1406**, and third surgical blade **1408**, are connected to each other. As etchant **1402** works on the silicon, one layer after another of molecules is removed over time, decreasing the width of the silicon (i.e., the surgical blade) until the two angles, **1410** and **1412** (of first surgical blade **1404**), intersect at the point where they are joined to the next surgical blade (second surgical blade **1406**). The result is that several surgical blades (**1404**, **1406** and **1408**) are formed. Note that the same angles have been maintained throughout the isotropic etching process, except that less silicon material remains because it has been dissolved by etchant **1402**.

[0074] FIGS. **18A** and **18B** illustrate an isotropic etching process on a silicon wafer with machined trenches on both sides, and a coating layer on one side, according to another embodiment of the present invention. In FIGS. **18A** and **18B**, tape **308** and coating **1102** have been left on silicon wafer **202** so that the etching process only acts upon second side **306** of silicon wafer **202**. It is not necessary that the wafer be mounted on tape during the etching process; this is only a manufacturing option. Again, isotropic etch material **1402** works upon the exposed silicon wafer **202** solely, removing silicon material (one layer after another), but maintaining the same angle as was machined in step **2004** (because this is second side **306**). As a result, in FIG. **18B**, silicon based surgical blades **1504**, **1506** and **1508** have the same angle as was machined in steps **1008** and **2004**, on first side **304**, because of tape **308** and optional coating **1102**, and on second side **306**, because isotropic etchant **1402** removes uniform layers of silicon molecules along the machined trench surface. First side **304** of silicon wafer **202** has not been etched at all, providing additional strength to the finished silicon based surgical blade.

[0075] Another benefit of using optional step **2002**, applying coating **1102** to first side **304** of silicon wafer **202**, is that the cutting edge (the first machined trench side) is composed of coating **1102** (which is preferably comprised of a layer of silicon nitride) that possesses stronger material properties than the base silicon material. Therefore, the process of applying coating **1102** results in a cutting edge that is stronger and more durable. Coating **1102** also provides a wear-barrier to the blade surface which can be desirable for blades that come in contact with steel in electromechanical reciprocating blade devices. Table I illustrates typical strength-indicating specifications of a silicon based surgical blade manufactured without coating **1102** (silicon) and with coating **1102** (silicon nitride).

TABLE I

Property	Silicon	Silicon Nitride
Young's Modulus (GPa)	160	323
Yield Strength (GPa)	7	14

[0076] Young's Modulus (also known as the modulus of elasticity) is a measurement of a material's inherent stiffness. The higher the modulus, the stiffer the material. Yield strength is the point at which a material, under load, will transition from elastic to plastic deformation. In other words, it is the point at which the material will no longer flex, but will permanently warp or break. After etching (with or

without coating **1102**), the etched silicon wafer **202** is thoroughly rinsed and cleaned to remove all residual etchant **1402** chemicals.

[0077] FIG. **19** illustrates a resultant cutting edge of a double bevel silicon surgical blade with a coating on one side manufactured according to an embodiment of the present invention. The cutting edge **1602** typically has a radius of 5 to 500 nanometers which is similar to that of a diamond surgical blade, but manufactured at much less cost. After the etching process of step **1018** has been performed, silicon based surgical blades can be mounted according to step **1020**, which is the same as mounting steps **1002** and step **2003**.

[0078] Following mounting step **1020**, the silicon based surgical blades (silicon blades) can be singulated in step **1022**, which means that each silicon blade is cut apart through use of a dicing saw blade, laser beam (e.g., laser waterjet **402** or an excimer laser), or other suitable means to separate the silicon blades from each other. As one skilled in the art can appreciate, lasers with certain wavelengths within the range of 150 nm to 11,000 nm can also be used. An example of a laser in this wavelength range is an excimer laser. The uniqueness of the laser waterjet (a YAG laser) is that it can scroll curvilinear, interrupted patterns in the wafer. This provides the manufacturer the flexibility to make virtually an unlimited number of non-cutting edge blade profiles. The laser waterjet uses a stream of water as a waveguide that allows the laser to cut like a band saw. This cannot be achieved with the current state of the art dicing machines, which, as mentioned above, can only dice in continuous, straight-line patterns.

[0079] In step **1024** the singulated surgical silicon blades are picked and placed on blade handle assemblies, according to the particular desires of the customers. Prior to actual "picking and placing" however, the etched silicon wafers **202** (being mounted on either tape and frame or on a tape/wafer frame) are radiated by ultraviolet (UV) light in the wafer mounting machine to reduce tape **308** tackiness. Silicon wafers **202**, still on the "reduced tackiness" tape and frame, or tape/wafer frame, are then loaded into a commercially available die-attach assembly system. Recall from above it was discussed that the order of certain steps can be interchanged according to various manufacturing environments. One such example are the steps of singulation and radiation by UV light: these steps can be interchanged if necessary.

[0080] The die-attach assembly system will remove the individual etched silicon surgical blades from the "reduced tackiness" tape and wafer or tape/wafer frame, and will attach the silicon surgical blades to their respective holders within the desired tolerance. An epoxy or adhesive will be used to mount the two components. Other assembly methods can be used to attach the silicon surgical blade to its respective substrate, including heat staking, ultrasonic staking, ultrasonic welding, laser welding or eutectic bonding. Lastly in step **1026**, the fully assembled silicon surgical blades with handles, are packaged to ensure sterility and safety, and transported for use according to the design of the silicon surgical blade.

[0081] Another assembly method that can be used to mount the surgical blade to its holder involves another use of slots. Slots, as discussed above, can be created by the laser

water-jet or excimer laser, and were used to provide an opening for the dicing saw blade to engage the silicon wafer **202** when machining trenches. An additional use of slots can be to provide a receptacle in the blade for one or more posts in a holder. **FIG. 24** illustrates such an arrangement. In **FIG. 24**, finished surgical blade **2402** has had two slots **2404a**, **2404b** created in its holder interface region **2406**. These interface with posts **2408a**, **2408b** of blade holder **2410**. The slots can be cut into the silicon wafer **202** at any point in the manufacturing process, but preferably can be done prior to singulation of the surgical blades. Prior to being interfaced, an adhesive can be applied to the appropriate areas, assuring a tight hold. Then, cover **2412** can be glued as shown, to provide a finished appearance to the final product. The purpose for implementing the post-slot assembly is that it provides additional resistance to any pulling force that blade **2402** might encounter during a cutting procedure.

[0082] Having described the manufacturing process for a double bevel silicon-based surgical blade, attention is turned to **FIG. 2**, which illustrates a flow diagram of a method for manufacturing a single bevel surgical blade from silicon according to a second embodiment of the present invention. Steps **1002**, **1004**, **1006**, **1008** of **FIG. 1** are the same for the method illustrated in **FIG. 2**, and therefore will not be repeated. However, the method for manufacturing a single bevel surgical blade differs in the next step, step **1010**, from the method for manufacturing a double bevel blade, and therefore, will be discussed in detail.

[0083] Following step **1008** decision step **1010** determines whether the machined silicon wafer **202** will be dismounted from silicon wafer mounting assembly **204**. If the single trench silicon wafers **202** were to be dismounted (in step **1012**), then a further option is to dice the single trench wafers in step **1016**. In optional dismounting step **1012**, the silicon wafer **202** is dismounted from tape **308** utilizing the same standard mounting machine.

[0084] If silicon wafer **202** was dismounted in step **1012**, then optionally the silicon wafer **202** can be diced (i.e., silicon wafer **202** cut apart into strips) in step **1016**. Dicing step **1016** can be performed by a dicing blade, excimer laser **902**, or laser waterjet **402**. Dicing provides for the resultant strips to be etched (in step **1018**) in custom fixtures in lieu of wafer boats (discussed in detail below). Following either the dicing step of **1016**, the dismounting step of **1012**, or the machine trench step of **1008**, the next step in the method for manufacturing a single bevel silicon based surgical blade is step **1018**. Step **1018** is the etching step, which has already been discussed in detail above. Thereafter, steps **1020**, **1022**, **1024** and **1026** follow, all of which have been described in detail above in reference to the manufacture of a double bevel silicon based surgical blade, and therefore do not need to be discussed again.

[0085] **FIG. 3** illustrates a flow diagram of an alternative method for manufacturing a single bevel surgical blade from silicon according to a third embodiment of the present invention. The method illustrated in **FIG. 3** is identical to that illustrated in **FIG. 2**, through steps **1002**, **1004**, **1006**, **1008**. After step **1008** in **FIG. 3**, however, there is coating step **2002**. The coating step **2002** was described above in reference to **FIG. 1**, and need not be discussed in detail again. The result of the coating step is the same as was described previously: the machined side of silicon wafer **202** has a layer **1102** over it.

[0086] Following the coating step **2002**, the silicon wafer **202** is dismounted and remounted in step **2003**. This step is also identical as was previously discussed in reference to **FIG. 1** (step **2003**). The result is that the coated side of silicon wafer **202** is face down on the mounting assembly **204**. Thereafter, steps **1018**, **1020**, **1022**, **1024** and **1026** take place, all of which have been described in detail above. The net result is a single bevel surgical blade, with the first side **304** (machined side) provided with a layer of coating **1102** to improve the strength and durability of the surgical blade. **FIGS. 23A and 23B** illustrate and describe the single bevel coated surgical blade in greater detail.

[0087] **FIGS. 23A and 23B** illustrate an isotropic etching process on a silicon wafer with a machined trench on one side, and a coating layer on an opposite side according to a further embodiment of the present invention. As described above, silicon wafer **202** has coating **1102** applied to first side **304** which is then mounted onto tape **308**, thus coming in close contact with it, as shown in **FIG. 23A**. Silicon wafer **202** is then placed in bath **1400**, which contains etchant **1402**, as discussed in detail above. Etchant **1402** begins to etch the second side **306** ("top side") of silicon wafer **202**, removing one layer after another of silicon molecules. After a period of time, silicon wafer **202** has its thickness reduced by etchant **1402** until second side **306** comes in contact with first side **304** and coating **1102**. The result is a silicon nitride coated single bevel silicon based surgical blade. All of the aforementioned advantages of having a silicon nitride (or coated) blade edge apply equally to this type of blade as shown and discussed in reference to **FIGS. 18A, 18B and 19**.

[0088] **FIGS. 20A-20G** illustrate various examples of silicon based surgical blades that can be manufactured in accordance with the method of the present invention. Various blade designs can be manufactured utilizing this process. Blades with single bevels, symmetric and asymmetric double bevels, and curvilinear cutting edges can be produced. For single bevels, the machining is only performed on one side of the wafer. Various blade profiles can be made, such as single edge chisel (**FIG. 20A**), three edge chisel (**FIG. 20B**), slit, two edges sharp (**FIG. 20C**), slit, four edges sharp (**FIG. 20D**), stab, one edge sharp (**FIG. 20E**), keratome, one edge sharp (**FIG. 20F**) and crescent, curvilinear sharp edge (**FIG. 20G**). The profile angles, widths, lengths, thicknesses, and bevel angles can be varied with this process. This process can be combined with traditional photolithography to produce more variations and features.

[0089] **FIGS. 21A and 21B** illustrate a side view of a silicon surgical blade manufactured in accordance with an embodiment of the invention, and a stainless steel surgical blade, at 5,000× magnification, respectively. Note the difference between **FIGS. 21A and 21B**. **FIG. 21A** is much smoother and more uniform. **FIGS. 22A and 22B** illustrate top views of the blade edge of a silicon surgical blade manufactured in accordance with an embodiment of the invention and a stainless steel blade, at 10,000× magnification, respectively. Again, the difference between **FIG. 22A** and **FIG. 22B** is that the former, the result of the method according to an embodiment of the invention, is much smoother and more uniform than the stainless steel blade of **FIG. 22B**.

[0090] **FIGS. 25A and 25B** illustrate profile perspectives of a blade edge made of a crystalline material, and a blade

edge made of a crystalline material that includes a layer conversion process in accordance with an embodiment of the invention. In another embodiment of the invention, it is possible to chemically convert the surface of the substrate material to a new material **2504** after etching the silicon wafer. This step can also be known as a "thermal oxidation, nitride conversion" or "silicon carbide conversion of the silicon surface" step. Other compounds can be created depending on which elements are allowed to interact with the substrate/blade material. The benefit of converting the surface of the blade to a compound of the substrate material is that the new material/surface can be selected such that a harder cutting edge is created. But unlike a coating, the cutting edge of the blade maintains the geometry and sharpness of the post etch step. Note that in **FIGS. 25A and 25B**, the depth of the silicon blade has not changed because of the conversion process; "D1" (the depth of the silicon-only blade) is equal to "D2" (the depth of the silicon blade with a conversion layer **2504**).

[0091] Referring to **FIG. 1**, after step **1018** a decision is made to convert the surface (decision step **1019**). If a conversion layer is to be added ("Yes" path from decision step **1019**), a conversion layer is added in step **1021**. The method then proceeds to step **1020**. If no conversion layer is to be added ("No" path from decision step **1019**), the method proceeds to step **1020**. The conversion process requires diffusion or high temperature furnaces. The substrate is heated under vacuum or in an inert environment to a temperature in excess of 500° C. Selected gasses are metered into the furnace in controlled concentrations and as a result of the high temperature they diffuse into the silicon. As they diffuse into the silicon they react with the silicon to form a new compound. Since the new material is created by diffusion and chemical reaction with the substrate rather than applying a coating, the original geometry (sharpness) of the silicon blade is preserved. An additional benefit of the conversion process is that the optical index of refraction of the converted layer is different than that of the substrate so the blade appears to be colored. The color depends both on the composition of the converted material and its thickness.

[0092] A single crystal substrate material that has been converted at the surface also exhibits superior fracture and wear resistance than a non converted blade. By changing the surface to a harder material the tendency of the substrate to form crack initiation sites and cleave along crystalline planes is reduced.

[0093] A further example of a manufacturing step that can be performed with some interchangeability is the matte-finish step. Often, especially when manufactured in the preferred embodiment of surgical blades, the silicon surface of the blade will be highly reflective. This can be distracting to the surgeon if the blade is being used under a microscope with a source of illumination. Therefore, the surface of the blade can be provided with a matte finish that diffuses incident light (from a high-intensity lamp used during surgical procedure, for example), making it appear dull, as opposed to shiny. The matte finish is created by radiating the blade surface with a suitable laser, to ablate regions in the blade surface according to specific patterns and densities. The ablated regions are made in the shape of a circle because that is generally the shape of the emitted laser beam, though that need not be the case. The dimension of the circular ablated regions ranges from 25-50 microns in diameter, and

again is dependent upon the manufacturer and type of laser used. The depth of the circular ablated regions ranges from 10-25 microns.

[0094] The "density" of circular ablated regions refers to the total percentage surface area covered by the circular ablated regions. An "ablated region density" of about 5% dulls the blade noticeably, from its normally smooth, mirror-like appearance. However, co-locating all the ablated regions does not affect the mirror-like effect of the balance of the blade. Therefore, the circular ablated regions are applied throughout the surface area of the blade, but in a random fashion. In practice, a graphic file can be generated that randomly locates the depressions, but achieves the desired effect of a specific ablated region density and randomness to the pattern. This graphic file can be created manually, or automatically by a program in a computer. An additional feature that can be implemented is the inscription of serial numbers, manufacturer logos, or the surgeon's or hospital's name on the blade itself.

[0095] Typically, a gantry laser can be used to create the matte finish on the blades, or a galvo-head laser machine. The former is slow, but extremely accurate, and the latter is fast, but not as accurate as the gantry. Since the overall accuracy is not vital, and speed of manufacturing directly affects cost, the galvo-head laser machine is the preferred tool. It is capable of moving thousands of millimeters per second, providing an overall ablated region etch time of about five seconds for a typical surgical blade.

[0096] The present invention has been described with reference to certain exemplary embodiments thereof. However, it will be readily apparent to those skilled in the art that it is possible to embody the invention in specific forms other than those of the exemplary embodiments described above. This may be done without departing from the spirit and scope of the invention. The exemplary embodiment is merely illustrative and should not be considered restrictive in any way. The scope of the invention is defined by the appended claims and their equivalents, rather than by the preceding description.

What is claimed is:

1. A method for manufacturing a cutting device from a crystalline material, comprising:

machining at least one blade profile in the wafer of crystalline material on its first side;

etching the wafer of crystalline material to form at least one surgical blade; and

singulating the etched crystalline material surgical blades.

2. The method according to claim 1, wherein the machining step comprises:

machining at least one blade profile in the wafer of crystalline material with a dicing saw blade.

3. The method according to claim 1, wherein the machining step comprises:

machining at least one blade profile in the wafer of crystalline material with a laser beam.

4. The method according to claim 3, wherein the laser beam is produced by an excimer laser or a laser waterjet.

5. The method according to claim 1, wherein the machining step comprises:

machining at least one blade profile in the wafer of crystalline material with an ultrasonic machine.

6. The method according to claim 1, wherein the machining step comprises:

machining at least one blade profile in the wafer of crystalline material with a hot forging process.

7. The method according to claim 1, wherein the etching step comprises:

placing the wafer of crystalline material with at least one blade profile on a wafer boat;

immersing the wafer boat and wafer of crystalline material with at least one blade profile in an isotropic acid bath;

etching the crystalline material in a uniform manner such that the crystalline material is removed in a uniform manner on any exposed surface, whereby a sharp surgical blade edge is etched in the shape of the at least one blade profile.

8. The method according to claim 7, wherein the isotropic acid bath comprises:

a mixture of hydrofluoric acid, nitric acid and acetic acid.

9. The method according to claim 7, wherein the isotropic acid bath comprises:

a mixture of hydrofluoric acid, nitric acid and water.

10. The method according to claim 1, wherein the etching step comprises:

placing the wafer of crystalline material with at least one blade profile in a wafer boat;

spraying a spray etchant at the wafer boat and wafer of crystalline material with at least one blade profile;

etching the crystalline material in a uniform manner with the spray etchant such that the crystalline material is removed in a uniform manner on any exposed surface, whereby a sharp surgical blade edge is etched in the shape of the at least one blade profile.

11. The method according to claim 1, wherein the etching step comprises:

placing the wafer of crystalline material with at least one blade profile on a wafer boat;

immersing the wafer boat and wafer of crystalline material with at least one blade profile in an isotropic xenon difluoride, sulfur hexafluoride or similar fluorinated gas environment;

etching the crystalline material in a uniform manner with the isotropic xenon difluoride, sulfur hexafluoride or similar fluorinated gas such that the crystalline material is removed in a uniform manner on any exposed surface, whereby a sharp surgical blade edge is etched in the shape of the at least one blade profile.

12. The method according to claim 1, wherein the etching step comprises:

placing the wafer of crystalline material with at least one blade profile in a wafer boat;

immersing the wafer boat and wafer of crystalline material with at least one blade profile in an electrolytic bath;

etching the crystalline material in a uniform manner with the electrolytic bath such that the crystalline material is removed in a uniform manner on any exposed surface, whereby a sharp surgical blade edge is etched in the shape of the at least one blade profile.

13. The method according to claim 1, wherein the singulating step comprises:

dicing the machined wafer of crystalline material with a dicing blade.

14. The method according to claim 1, wherein the singulating step comprises:

dicing the machined wafer of crystalline material with a laser beam.

15. The method according to claim 1, wherein the laser beam is produced by an excimer laser or a laser waterjet.

16. The method according to claim 1, further comprising:

dicing the machined wafer of crystalline material profiles after machining the at least one blade profile in the form of single bevel surgical blade and prior to the step of etching.

17. The method according to claim 16, wherein the dicing step comprises:

dicing the machined wafer of crystalline material with a dicing blade.

18. The method according to claim 16, wherein the dicing step comprises:

dicing the machined wafer of crystalline material with a laser beam.

19. The method according to claim 18, wherein the laser beam is produced by an excimer laser or a laser waterjet.

20. The method for manufacturing a surgical blade from a crystalline material according to claim 1, further comprising:

machining at least one second blade profile in the wafer of crystalline material on a second side of the wafer of crystalline material prior to the step of etching.

21. The method according to claim 20, further comprising:

coating the first side of the machined wafer of crystalline material.

22. The method according to claim 21, wherein the coating step comprises:

coating the first side of the machined wafer of crystalline material with a layer of material selected from the group consisting of silicon nitride, titanium nitride, aluminum titanium nitride, silicon dioxide, silicon carbide, titanium carbide, boron nitride, and diamond-like-crystals.

23. The method according to claim 20, further comprising:

dicing the machined wafer of crystalline material into separated machined double beveled blade profiles after machining the at least one second blade profile in the second side and prior to the step of etching.

24. The method according to claim 23, wherein the dicing step comprises:

dicing the machined wafer of crystalline material with a dicing blade.

25. The method according to claim 23, wherein the dicing step comprises:

dicing the machined wafer of crystalline material with a laser beam.

26. The method according to claim 25, wherein the laser beam is produced by an excimer laser or a laser waterjet.

27. The method according to claim 1, further comprising:

coating the first side of the wafer of crystalline material after the step of machining the wafer of crystalline material; and

mounting the wafer of crystalline material on its first side prior to the step of etching.

28. The method according to claim 27, wherein the coating step comprises:

coating the first side of the formed wafer of crystalline material with a layer of material selected from the group consisting of silicon nitride, titanium nitride, aluminum titanium nitride, silicon dioxide, silicon carbide, titanium carbide, boron nitride, and diamond-like-crystals.

29. The method according to claim 1, wherein the crystalline material comprises silicon.

30. A method for manufacturing a cutting device from a crystalline material, comprising:

mounting a wafer of crystalline material on a mounting assembly;

pre-cutting the mounted wafer of crystalline material, such that a plurality of through hole fiducials are cut to assist in the machining step;

machining at least one blade profile in the wafer of crystalline material on its first side;

etching the wafer of crystalline material to form at least one surgical blade;

singulating the etched crystalline material surgical blades; and

radiating the singulated etched crystalline material surgical blades with ultra- violet light, to separate them from the mounting assembly, in preparation for packaging for sale.

31. The method according to claim 30 wherein the pre-cutting step comprises:

pre-cutting through hole fiducials in the mounted wafer of crystalline material with a laser beam.

32. The method according to claim 31 wherein the laser beam is produced by an excimer laser or a laser waterjet.

33. The method according to claim 30 wherein the pre-cutting step comprises:

pre-cutting through hole fiducials in the mounted wafer of crystalline material using a mechanical machining device.

34. The method according to claim 33 wherein the mechanical machining device comprises a drilling tool, ultrasonic machining tool or a mechanical grinding device.

35. The method according to claim 30 wherein the crystalline material comprises silicon.

36. A method for manufacturing a cutting device from a crystalline material, comprising:

mounting a wafer of crystalline material on a mounting assembly;

pre-cutting the mounted wafer of crystalline material, such that a plurality slots are cut to assist in the machining step;

machining at least one blade profile in the wafer of crystalline material on its first side;

etching the wafer of crystalline material to form at least one surgical blade;

singulating the etched crystalline material surgical blades; and

radiating the singulated etched crystalline material surgical blades with ultra- violet light, to separate them from the mounting assembly, in preparation for packaging for sale.

37. The method according to claim 36 further comprising:

pre-cutting slots in the mounted wafer of crystalline material with a laser beam a distance away from the edge of the crystalline material; and

machining the at least one blade profile with a dicing saw blade that engages the crystalline wafer at the pre-cut slot.

38. The method according to claim 37, wherein the laser beam is produced by an excimer laser or a laser waterjet.

39. The method according to claim 36 further comprising:

pre-cutting slots in the mounted wafer of crystalline material with a mechanical machining device a distance away from the edge of the crystalline material; and

machining the at least one blade profile with a dicing saw blade that engages crystalline wafer at the pre-cut slot.

40. The method according to claim 39, wherein the mechanical machining device comprises a drilling tool, ultrasonic machining tool or a mechanical grinding device.

41. The method according to claim 36 wherein the crystalline material comprises silicon.

* * * * *

专利名称(译)	用于制造手术刀片的系统和方法		
公开(公告)号	US20030199165A1	公开(公告)日	2003-10-23
申请号	US10/383573	申请日	2003-03-10
[标]申请(专利权)人(译)	贝克顿·迪金森公司		
申请(专利权)人(译)	碧迪公司		
当前申请(专利权)人(译)	海狸VISITEC国际 (美国) , INC.		
[标]发明人	KEENAN JOSEPH FRANCIS DASKAL VADIM MARK HUGHES JAMES JOSEPH		
发明人	KEENAN, JOSEPH FRANCIS DASKAL, VADIM MARK HUGHES, JAMES JOSEPH		
IPC分类号	A61B17/3211 A61B17/00 A61B17/32 B21K11/00 B21K11/02 B23K26/38 B23K26/40 B28D5/02 C03C25/00 C23C30/00 C23F1/12 C23F1/24 H01L21/302 H01L21/461		
CPC分类号	A61B17/32 B28D5/022 A61B2017/00526 A61B17/3211		
优先权	60/430332 2002-12-03 US 60/362999 2002-03-11 US		
其他公开文献	US7105103		
外部链接	Espacenet USPTO		

摘要(译)

公开了一种由晶体或多晶材料制造手术刀片的方法，所述晶体或多晶材料优选为晶片形式。该方法包括通过安装晶体或多晶晶片并将沟槽加工到晶片中来制备晶体或多晶晶片。用于加工形成斜面刀片表面的沟槽的方法包括金刚石锯片，激光系统，超声波机器和热锻压力机。然后将晶片置于蚀刻剂溶液中，该溶液以均匀的方式各向同性地蚀刻晶片，使得均匀地除去晶体或多晶材料层，产生单或双斜面刀片。几乎任何角度都可以加工到晶片中，并在蚀刻后保留。叶片边缘的最终半径为5-500nm，与钻石边缘刀片的口径相同，但成本仅为其一小部分。

