



(19) **United States**

(12) **Patent Application Publication**
MIYAKE et al.

(10) **Pub. No.: US 2019/0237676 A1**
(43) **Pub. Date: Aug. 1, 2019**

(54) **ORGANIC ELECTROLUMINESCENCE
DEVICE AND MONOAMINE COMPOUND
FOR ORGANIC ELECTROLUMINESCENCE
DEVICE**

C07C 211/61 (2006.01)
C07D 409/12 (2006.01)

(52) **U.S. CI.**
CPC *H01L 51/0061* (2013.01); *C07D 333/76*
(2013.01); *C09K 11/06* (2013.01); *H01L*
51/5056 (2013.01); *C07D 307/91* (2013.01);
C07C 211/61 (2013.01); *C07D 409/12*
(2013.01); *H01L 51/006* (2013.01)

(71) Applicant: **SAMSUNG DISPLAY CO., LTD.**,
Yongin-si (KR)

(72) Inventors: **Hideo MIYAKE**, Yokohama (JP);
Masatsugu UENO, Yokohama (JP);
Xiulan JIN, Yokohama (JP); **Ichinori**
TAKADA, Yokohama (JP); **Takuya**
UNO, Yokohama (JP); **Hiroaki ITOI**,
Yokohama (JP)

(57) **ABSTRACT**

An organic electroluminescence device includes a first electrode, a hole transport region on the first electrode, an emission layer on the hole transport region, an electron transport region on the emission layer, and a second electrode on the electron transport region. The hole transport region includes a monoamine compound represented by the following Formula 1:

(21) Appl. No.: **16/254,777**


(22) Filed: **Jan. 23, 2019**

(30) **Foreign Application Priority Data**

Jan. 26, 2018 (KR) 10-2018-0009993
Nov. 20, 2018 (KR) 10-2018-0143745

Publication Classification

(51) **Int. Cl.**
H01L 51/00 (2006.01)
C07D 333/76 (2006.01)
C09K 11/06 (2006.01)
C07D 307/91 (2006.01)



[Formula 1]

10

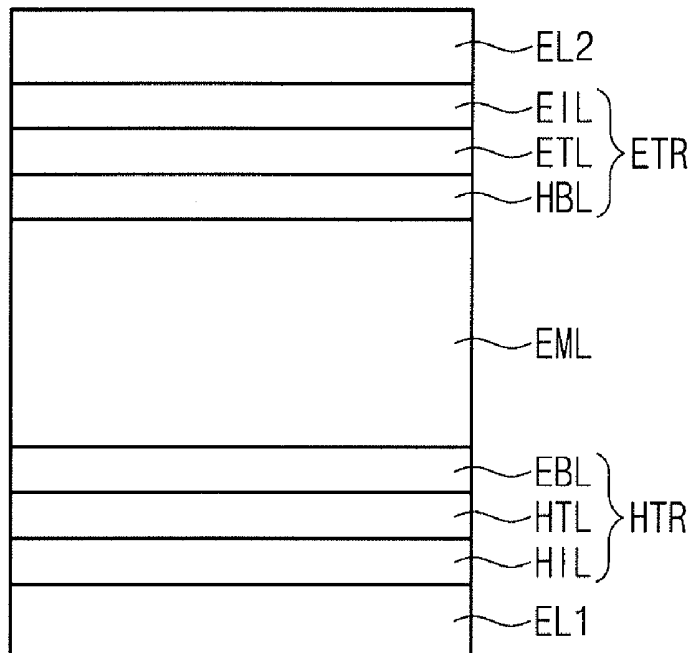


FIG. 1

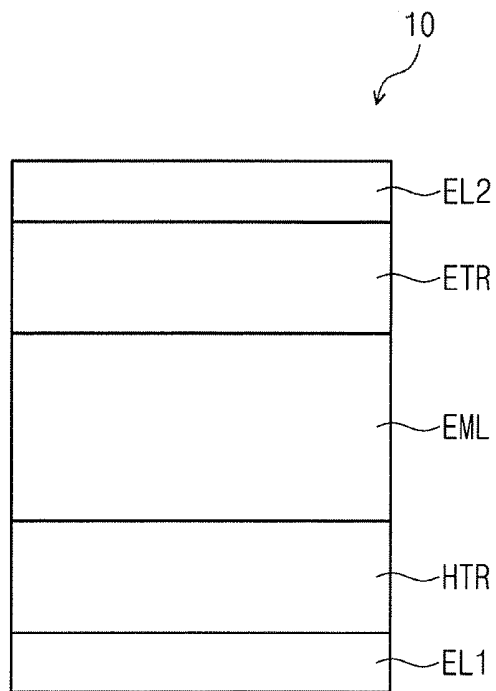


FIG. 2


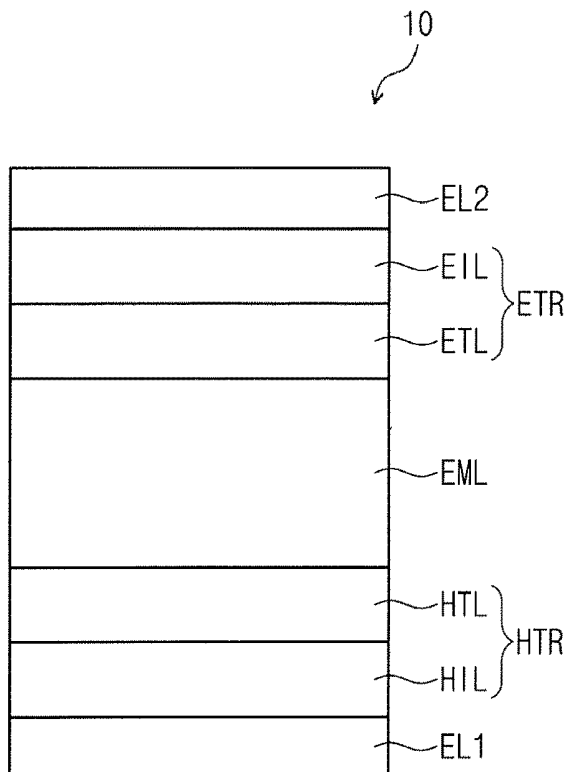


FIG. 3

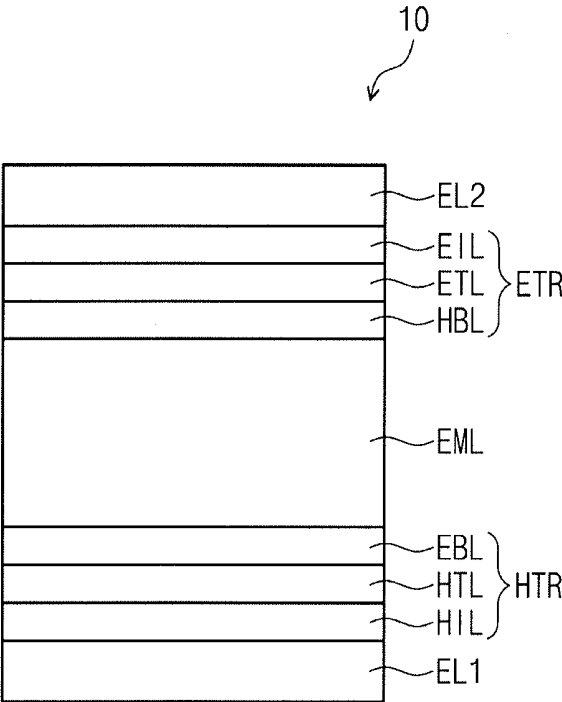

**ORGANIC ELECTROLUMINESCENCE
DEVICE AND MONOAMINE COMPOUND
FOR ORGANIC ELECTROLUMINESCENCE
DEVICE**

CROSS-REFERENCE TO RELATED
APPLICATION

[0001] Korean Patent Application No. 10-2018-0009993, filed on Jan. 26, 2018, and Korean Patent Application No. 10-2018-0143745, filed on Nov. 20, 2018, in the Korean Intellectual Property Office, and entitled: "Organic Electroluminescence Device and Monoamine Compound for Organic Electroluminescence Device," is incorporated by reference herein in its entirety.

BACKGROUND

1. Field


[0002] Embodiments relate to an organic electroluminescence device and a monoamine compound for an organic electroluminescence device.

2. Description of the Related Art

[0003] Development on an organic electroluminescence display as an image display is being actively conducted. An organic electroluminescence display is different from a liquid crystal display and is so called a self-luminescent display that accomplishes display by recombining holes and electrons injected from a first electrode and a second electrode in an emission layer and emitting light from a luminescent material which includes an organic compound in the emission layer.


SUMMARY

[0004] Embodiments are directed to an organic electroluminescence device including a first electrode, a hole transport region on the first electrode, an emission layer on the hole transport region, an electron transport region on the emission layer and a second electrode on the electron transport region, in which the hole transport region includes a monoamine compound represented by the following Formula 1.



[0005] In Formula 1, X is S, O or CRR', R and R' may each independently be a substituted or unsubstituted alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted aryl group having 6 to 20 ring carbon atoms, or a substituted or unsubstituted heteroaryl group having 2 to 10 ring carbon atoms, and are separate or form a ring by combining adjacent groups with each other, L₁ and L₂ may each independently be a direct linkage, a substituted or unsubstituted arylene group having 6 to 12 ring carbon atoms, or a

substituted or unsubstituted heteroarylene group having 2 to 12 ring carbon atoms, n and m may each independently be an integer of 0 to 2, R₄ may be a hydrogen atom, a substituted or unsubstituted alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 ring carbon atoms, or a substituted or unsubstituted heteroaryl group having 2 to 30 ring carbon atoms, q may be an integer of 0 to 7, Ar₁ may be a substituted or unsubstituted aryl group having 6 to 12 ring carbon atoms, or a substituted or unsubstituted heteroaryl group having 2 to 12 ring carbon atoms, in a case where X is CRR' then Ar₁ may not include a heteroaryl group, and FR may be represented by the following Formula 2.




[0006] In an embodiment, the hole transport region may have a plurality of layers, and a layer of the plurality of layers contacting with the emission layer may include the monoamine compound according to an example embodiment.

[0007] In an embodiment, the hole transport region may include a hole injection layer on the first electrode, a hole transport layer on the hole injection layer, and an electron blocking layer on the hole transport layer, and the electron blocking layer may include the monoamine compound according to an example embodiment.

[0008] In an embodiment, the electron transport region may include a hole blocking layer on the emission layer, an electron transport layer on the hole blocking layer, and an electron injection layer on the electron transport layer.

[0009] In Formula 2, R₁ may be a hydrogen atom, a deuterium atom, or a halogen atom, and a may be an integer of 0 to 6.

[0010] In an embodiment, FR may be represented by the following Formula 2-1.



[0011] In Formula 2-1, b may be an integer of 0 to 5, and R₁ is the same as defined above.

[0012] In an embodiment, n may be 1, and L₁ may be a substituted or unsubstituted arylene group having 6 to 12 ring carbon atoms.

[0013] In an embodiment, L₁ may be a substituted or unsubstituted phenylene group.

[0014] In an embodiment, FR may be substituted at a para position to the nitrogen atom.

[0015] In an embodiment, m may be 1, L_2 may be a substituted or unsubstituted arylene group having 6 to 12 ring carbon atoms, and Ar_1 may be a substituted or unsubstituted aryl group having 6 to 12 ring carbon atoms.

[0016] In an embodiment, L_2 may be a substituted or unsubstituted phenylene group, and Ar_1 may be a substituted or unsubstituted phenyl group, a substituted or unsubstituted biphenyl group, or a substituted or unsubstituted naphthyl group.

[0017] In an embodiment, m may be 0, and Ar_1 may be a substituted or unsubstituted heteroaryl group having 5 to 12 ring carbon atoms.

[0018] In an embodiment, Ar_1 may be a substituted or unsubstituted dibenzofuran group, or a substituted or unsubstituted dibenzothiophene group.

[0019] Embodiments are also directed to a monoamine compound represented by the above Formula 1.

BRIEF DESCRIPTION OF THE DRAWINGS

[0020] Features will become apparent to those of skill in the art by describing in detail example embodiments with reference to the attached drawings in which:

[0021] FIG. 1 illustrates a schematic cross-sectional view of an organic electroluminescence device according to an example embodiment;

[0022] FIG. 2 illustrates a schematic cross-sectional view of an organic electroluminescence device according to an example embodiment; and

[0023] FIG. 3 illustrates a schematic cross-sectional view of an organic electroluminescence device according to an example embodiment.

DETAILED DESCRIPTION

[0024] Example embodiments will now be described more fully hereinafter with reference to the accompanying drawings; however, they may be embodied in different forms and should not be construed as limited to the embodiments set forth herein. Rather, these embodiments are provided so that this disclosure will be thorough and complete, and will fully convey example implementations to those skilled in the art. In the drawing figures, the dimensions of layers and regions may be exaggerated for clarity of illustration. Like reference numerals refer to like elements throughout.

[0025] It will be understood that, although the terms first, second, etc. may be used herein to describe various elements, these elements should not be limited by these terms. These terms are only used to distinguish one element from another element. For example, a first element discussed below could be termed a second element, and similarly, a second element could be termed a first element. As used herein, the singular forms are intended to include the plural forms as well, unless the context clearly indicates otherwise.

[0026] It will be further understood that the terms “comprise” or “have,” when used in this specification, specify the presence of stated features, numerals, steps, operations, elements, parts, or a combination thereof, but do not preclude the presence or addition of one or more other features, numerals, steps, operations, elements, parts, or a combination thereof. It will also be understood that when a layer, a film, a region, a plate, etc. is referred to as being “on” another part, it can be “directly on” the other part, or intervening layers may also be present. On the other hand, when a layer, a film, a region, a plate, etc. is referred to as

being “under” another part, it can be “directly under” the other part, or intervening layers may also be present.

[0027] First, an organic electroluminescence device according to an example embodiment will be explained referring to FIGS. 1 to 3.

[0028] FIG. 1 is a schematic cross-sectional view illustrating an organic electroluminescence device according to an example embodiment. FIG. 2 is a schematic cross-sectional view illustrating an organic electroluminescence device according to an example embodiment. FIG. 3 is a schematic cross-sectional view illustrating an organic electroluminescence device according to an example embodiment.

[0029] Referring to FIGS. 1 to 3, an organic electroluminescence device 10 according to an example embodiment includes a first electrode EL1, a hole transport region HTR, an emission layer EML, an electron transport region ETR, and a second electrode EL2.

[0030] The hole transport region HTR includes the monoamine compound according to an example embodiment. Hereinafter, the monoamine compound according to an example embodiment will be specifically explained, and then each layer of the organic electroluminescence device 10 will be explained.

[0031] In the present disclosure,



means a position to be connected.

[0032] In the present disclosure, “substituted or unsubstituted” may mean unsubstituted or substituted with at least one substituent selected from the group of deuterium, halogen, cyano, nitro, silyl, boron, phosphine, alkyl, alkenyl, aryl, and heterocyclic group. In addition, each substituent described above may be substituted or unsubstituted. For example, biphenyl may be interpreted as aryl, or phenyl substituted with phenyl.

[0033] In the present disclosure, the term to “form a ring by combining adjacent groups with each other” may mean forming a substituted or unsubstituted hydrocarbon ring, or a substituted or unsubstituted heterocycle by combining adjacent groups with each other. The hydrocarbon ring includes an aliphatic hydrocarbon ring and an aromatic hydrocarbon ring. The heterocycle includes an aliphatic heterocycle and an aromatic heterocycle. The hydrocarbon ring and heterocycle may be a monocycle or a polycycle. In addition, the ring formed by combining adjacent groups may be connected with another ring to form a Spiro structure.


[0034] In the present disclosure, the term “an adjacent group” may mean a substituent at an atom which is directly connected with another atom at which a corresponding substituent is substituted, another substituent at an atom at which a corresponding substituent is substituted, or a substituent stereoscopically disposed at the nearest position to a corresponding substituent. For example, two methyl groups in 1,2-dimethylbenzene may be interpreted as “adjacent groups”, and two ethyl groups in 1,1-diethylcyclopentane may be interpreted as “adjacent groups”.

[0035] In the present disclosure, examples of a halogen atom are a fluorine atom, a chlorine atom, a bromine atom, and an iodine atom.

[0036] In the present disclosure, the alkyl group may have a linear, branched or cyclic form. The carbon number of the alkyl group may be 1 to 30, 1 to 20, 1 to 10, or 1 to 4. Examples of the alkyl group may include methyl, ethyl, n-propyl, isopropyl, n-butyl, s-butyl, t-butyl, i-butyl, 2-ethylbutyl, 3,3-dimethyl butyl, n-pentyl, i-pentyl, neopentyl, t-pentyl, cyclopentyl, 1-methylpentyl, 3-methylpentyl, 2-ethylpentyl, 4-methyl-2-pentyl, n-hexyl, 1-methylhexyl, 2-ethylhexyl, 2-butylhexyl, cyclohexyl, 4-methylcyclohexyl, 4-t-butylcyclohexyl, n-heptyl, 1-methylheptyl, 2,2-dimethylheptyl, 2-ethylheptyl, 2-butylheptyl, n-octyl, t-octyl, 2-ethyloctyl, 2-butyloctyl, 2-hexyloctyl, 3,7-dimethyloctyl, cyclooctyl, n-nonyl, n-decyl, adamantyl, 2-ethyldecyl, 2-butyldecyl, 2-hexyldecyl, 2-octyldecyl, n-undecyl, n-dodecyl, 2-ethyldecyl, 2-butyldecyl, 2-hexyldecyl, 2-octyldecyl, n-tridecyl, n-tetradecyl, n-pentadecyl, n-hexadecyl, 2-ethylhexadecyl, 2-butylhexadecyl, 2-hexylhexadecyl, 2-octylhexadecyl, n-heptadecyl, n-octadecyl, n-nonadecyl, n-eicosyl, 2-ethyl eicosyl, 2-butyl eicosyl, 2-hexyl eicosyl, 2-octyl eicosyl, n-heneicosyl, n-docosyl, n-tricosyl, n-tetracosyl, n-pentacosyl, n-hexacosyl, n-heptacosyl, n-octacosyl, n-nonacosyl, n-triacontyl, etc.

[0037] In the present disclosure, the aryl group means any functional group or substituent derived from an aromatic hydrocarbon ring. The aryl group may be monocyclic aryl or polycyclic aryl. The carbon number of the aryl group for forming a ring may be 6 to 30, 6 to 20, or 6 to 12. Examples of the aryl group may include phenyl, naphthyl, fluorenyl, anthracenyl, phenanthryl, biphenyl, terphenyl, quaterphenyl, quinqphenyl, sexiphenyl, biphenylene, triphenylene, pyrenyl, benzofluoranthenyl, chrysenyl, etc.

[0038] In the present disclosure, the fluorenyl group may be substituted, and two substituents may be combined with each other to form a Spiro structure. Examples of the substituted fluorenyl group may include the following groups:

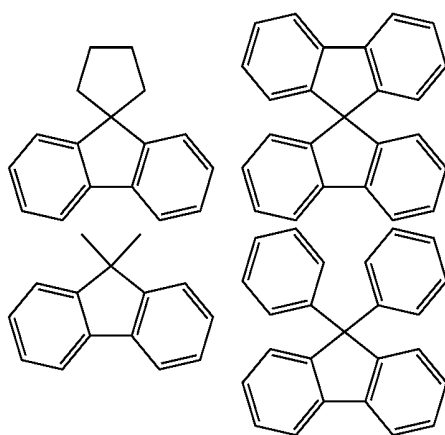

[0039] In the present disclosure, the heteroaryl group may be heteroaryl including at least one of O, N, P, Si, or S as a heteroatom. When the heteroaryl group includes two heteroatoms, the two heteroatoms may be the same or different from each other. The carbon number of the heteroaryl group for forming a ring may be 2 to 30, or 5 to 12. The heteroaryl group may be monocyclic heteroaryl or polycyclic het-

eroaryl. Polycyclic heteroaryl may have bicyclic or tricyclic structure, for example. Examples of the heteroaryl group may include thiophene, furan, pyrrole, imidazole, thiazole, oxazole, oxadiazole, triazole, pyridine, bipyridine, pyrimidine, triazine, triazole, acridyl, pyridazine, pyrazinyl, quinoline, quinazoline, quinoxaline, phenoxazine, phthalazine, pyrido pyrimidine, pyrido pyrazine, pyrazino pyrazine, isoquinoline, indole, carbazole, N-aryl carbazole, N-heteroaryl carbazole, N-alkyl carbazole, benzoxazole, benzoimidazole, benzothiazole, benzocarbazole, benzothiophene, dibenzothiophene, thienothiophene, benzofuran, phenanthroline, thiazole, isoxazole, oxadiazole, thiadiazole, phenothiazine, dibenzosilole, dibenzofuran, etc.

[0040] In the present disclosure, the silyl group may include alkyl silyl and aryl silyl. Examples of the silyl group may include trimethylsilyl, triethylsilyl, t-butyl dimethylsilyl, vinyl dimethylsilyl, propyl dimethylsilyl, triphenylsilyl, diphenylsilyl, phenylsilyl, etc.


[0041] In the present disclosure, the boron group may include alkyl boron and aryl boron. Examples of the boron group may include trimethyl boron, triethyl boron, t-butyl dimethyl boron, triphenyl boron, diphenyl boron, phenyl boron, etc.

[0042] In the present disclosure, the alkenyl group may be linear or branched. The carbon number is not specifically limited, and may be 2 to 30, 2 to 20, or 2 to 10. Examples of the alkenyl group may include vinyl, 1-butenyl, 1-pentenyl, 1,3-butadienyl aryl, styrenyl, styrylvinyl, etc.

[0043] The above explanation on the aryl group may be applied to the arylene group, except that the arylene group is divalent.

[0044] The above explanation on the heteroaryl group may be applied to the heteroarylene group, except that the heteroarylene group is divalent.

[0045] A monoamine compound according to an example embodiment is represented by the following Formula 1.



[0046] According to the present example embodiment, in Formula 1, X may be S, O or CRR', R and R' may each independently be a substituted or unsubstituted alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted aryl group having 6 to 20 ring carbon atoms, or a substituted or unsubstituted heteroaryl group having 2 to 10 ring carbon atoms, and are separate or form a ring by combining adjacent groups with each other, L₁ and L₂ may each independently be a direct linkage, a substituted or unsubstituted arylene group having 6 to 12 ring carbon atoms, or a substituted or unsubstituted heteroarylene group having 2 to 12 ring carbon atoms, n and m may each independently be an integer of 0 to 2, R_A may be a hydrogen atom, a substituted or unsubstituted alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 ring carbon atoms, or a substituted or


unsubstituted heteroaryl group having 2 to 30 ring carbon atoms, q may be an integer of 0 to 7, Ar_1 may be a substituted or unsubstituted aryl group having 6 to 12 ring carbon atoms, or a substituted or unsubstituted heteroaryl group having 2 to 12 ring carbon atoms, and in case X is CRR' , Ar_1 may not include a heteroaryl group.

[0047] When Ar_1 is referred to as not including a heteroaryl group, it may include both the case where Ar_1 is not a heteroaryl group and the case where Ar_1 is not substituted with a heteroaryl group.

[0048] In Formula 1, when n is 2, two L_1 's may be the same or different from each other, and when m is 2, two L_2 's may be the same or different from each other.

[0049] In Formula 1, when q is an integer of 2 or more, a plurality of R_A may be the same or different from each other, and when q is 1, R_A may not be a hydrogen atom.

[0050] According to the present example embodiment, in Formula 1, FR is a naphthylene group substituted with one phenyl group. Although FR may be additionally substituted, the additional substituents do not include a phenyl group. In an example embodiment, FR is represented by the following Formula 2.




[Formula 2]

[0051] In Formula 2, R_1 is a hydrogen atom, a deuterium atom, or a halogen atom, and a is an integer of 0 to 6. When a is an integer of 2 or more, a plurality of R_1 may be the same or different from each other. In an example embodiment, when a is 1, R_1 may not be a hydrogen atom.

[0052] The compound of Formula 1, where FR is represented by Formula 2, may be advantageously applied to an organic electroluminescence device to improve efficiency of the device.


[0053] In an example embodiment, FR may be represented by the following Formula 2-1.



[Formula 2-1]

[0054] In Formula 2-1, b is an integer of 0 to 5, and R_1 is the same as defined above.

[0055] FR may be represented by any one of the following formulae, for example.

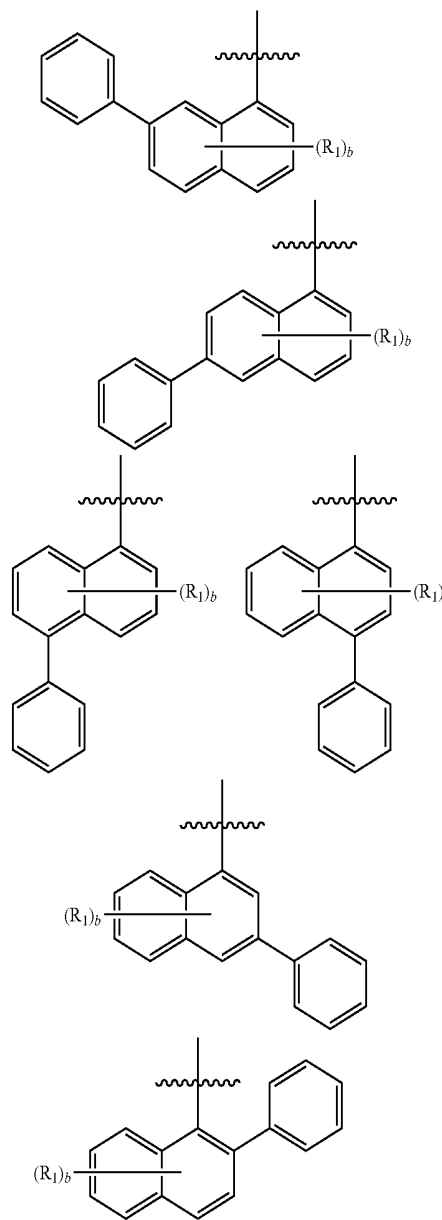

[0056] In Formula 2-1, R_1 may be, for example, a hydrogen atom or a deuterium atom.


[0057] In Formula 2, a may be 0. In another example embodiment, a may be 1, and R_1 may be a fluorine atom. In another example embodiment, a may be an integer of 2 or more, and a plurality of R_1 may be each independently a deuterium atom.

[0058] In Formula 1, n may be 1, and L_1 may be a substituted or unsubstituted arylene group having 6 to 12 ring carbon atoms. For example, L_1 may be a substituted or unsubstituted phenylene group.

[0059] In Formula 1, when L_1 is a substituted or unsubstituted phenylene group, FR may be substituted at a para position of the phenylene relative to the nitrogen atom of the monoamine compound as shown, for example, in the following Formula 1-1.

[0060] In an example embodiment, Formula 1 may be represented by the following Formula 1-1.

[Formula 1-1]

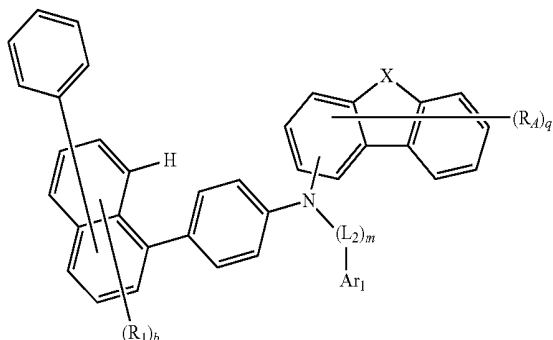

[0061] In Formula 1-1, X, L₂, Ar₁, R_A, R₁, q, m, and b are the same as defined above.

[0062] In Formula 1, Ar₁ may be a substituted or unsubstituted phenyl group, a substituted or unsubstituted biphenyl group, or a substituted or unsubstituted naphthyl group.

[0063] In Formula 1, when Ar₁ is a substituted or unsubstituted aryl group having 6 to 12 ring carbon atoms, m may be 1, and L₂ may be a substituted or unsubstituted arylene group having 6 to 12 ring carbon atoms. For example, Ar₁ may be a substituted or unsubstituted phenyl group, a substituted or unsubstituted biphenyl group, or a substituted or unsubstituted naphthyl group, and L₂ may be a substituted or unsubstituted phenylene group.

[0064] In Formula 1, when Ar₁ is a substituted or unsubstituted heteroaryl group having 5 to 12 ring carbon atoms, m may be 0. Thus, when Ar₁ is a heteroaryl group, Ar₁ may be directly connected to the nitrogen atom in Formula 1. For example, m may be 0, and Ar₁ may be a substituted or unsubstituted dibenzofuran group, or a substituted or unsubstituted dibenzothiophene group.


[0065] In Formula 1, q may be 0. For example, q may be 1, and R_A may be a substituted or unsubstituted aryl group having 6 to 15 ring carbon atoms. In another example, q may be 1, and R_A may be a substituted or unsubstituted phenyl group.

[0066] In Formula 1, when X is CRR', R and R' may be each independently a substituted or unsubstituted phenyl group, or a substituted or unsubstituted alkyl group having 1 to 5 carbon atoms. For example, R and R' may be each independently a substituted or unsubstituted phenyl group, or a substituted or unsubstituted methyl group. Furthermore, R and R' may be the same as each other.


[0067] The monoamine compound represented by Formula 1 according to an example embodiment may be any one selected from the group of compounds represented in the following Compound Group 1.

[Compound Group 1]


[0068]

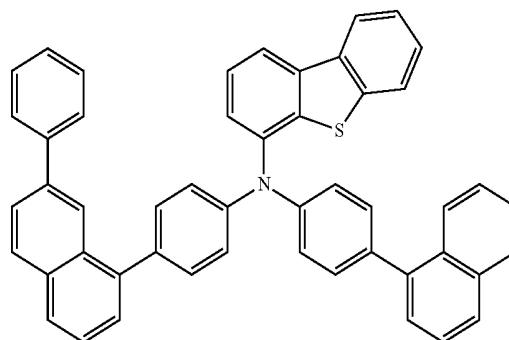


1

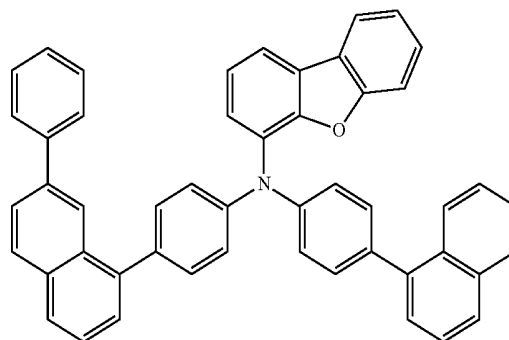

2

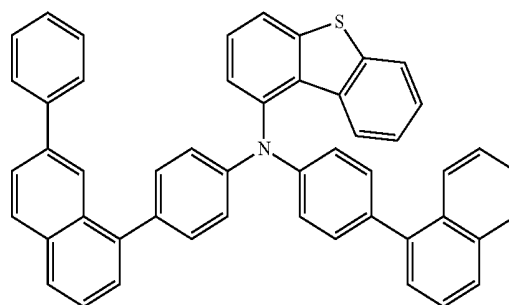


3

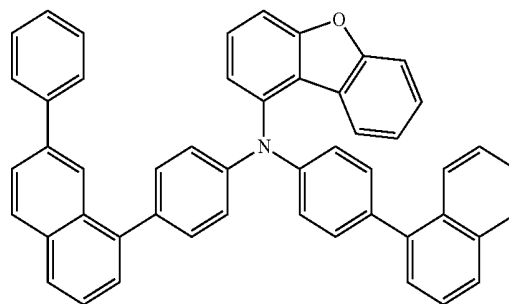


4


-continued

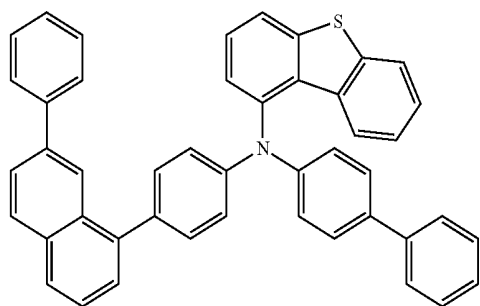


5

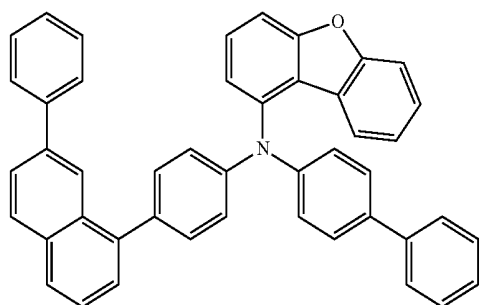

6

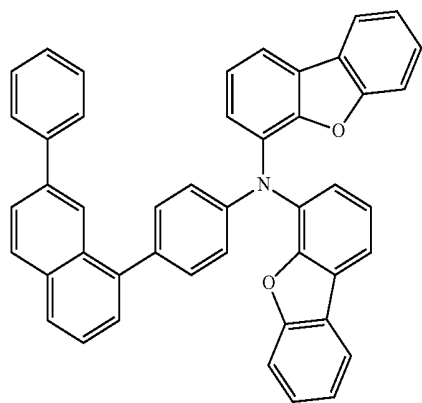


7

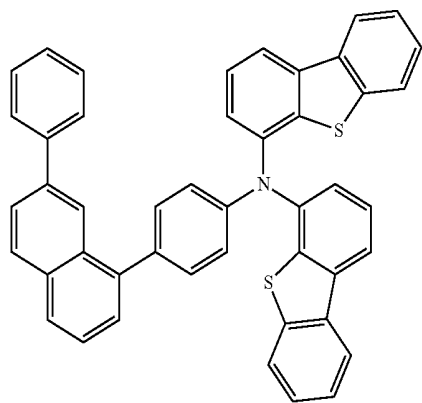


8


-continued

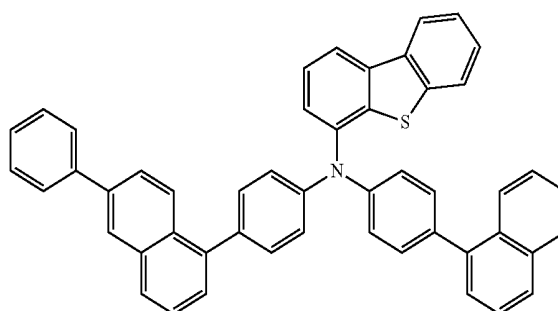


9

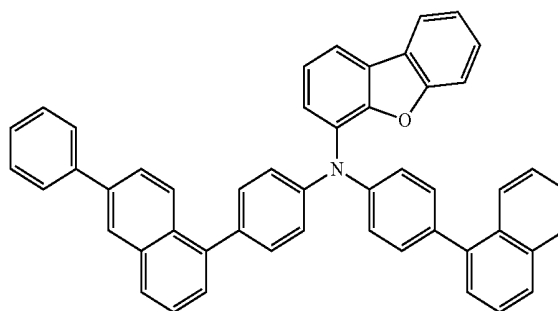


10

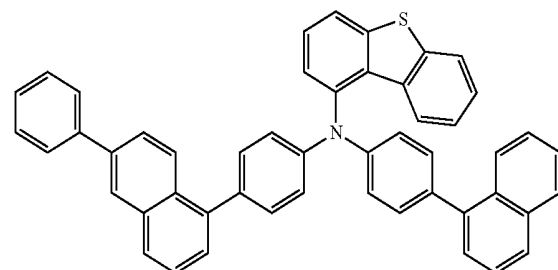

11

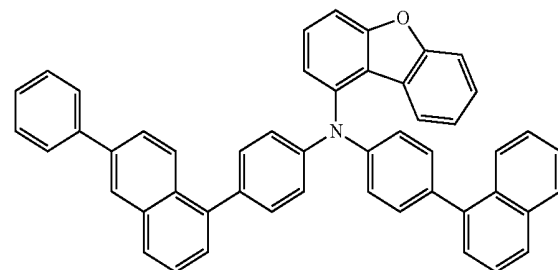


12

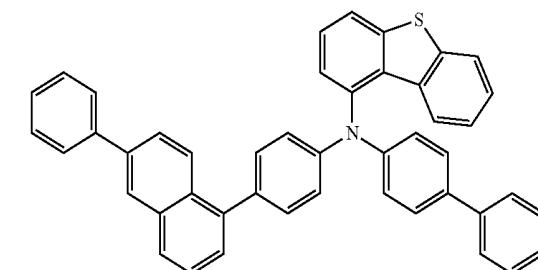


13

-continued


14

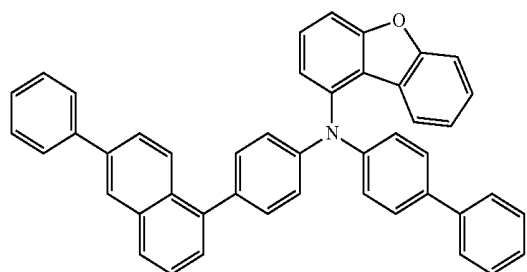


15

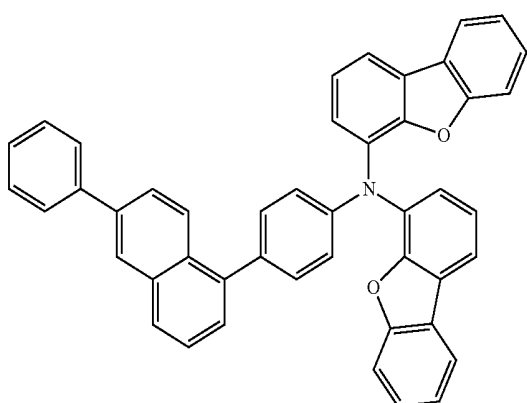

16

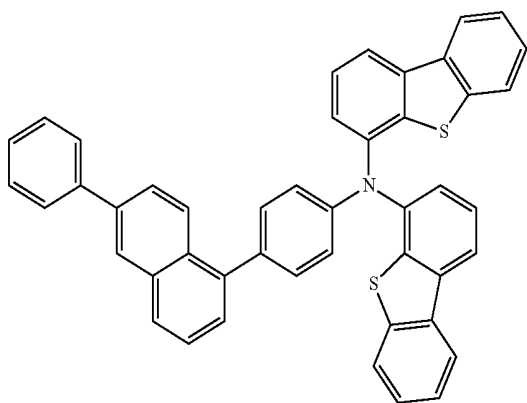


17

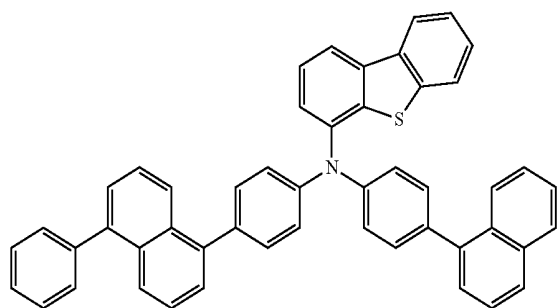


-continued


18

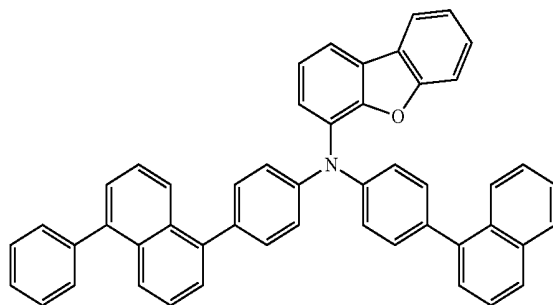


19

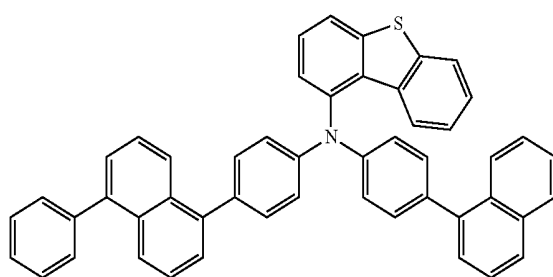


20

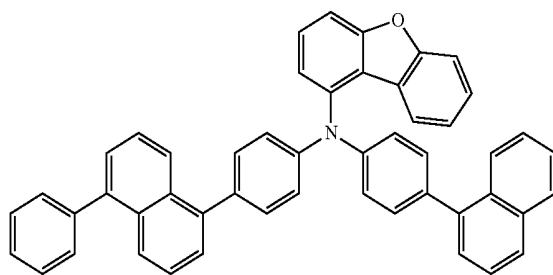

21

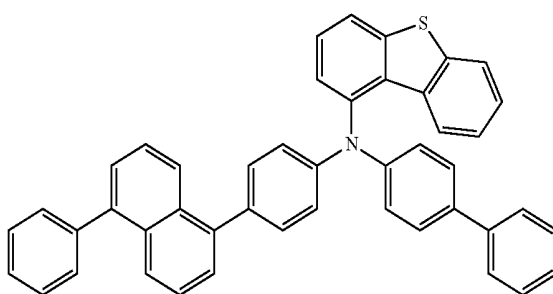


22

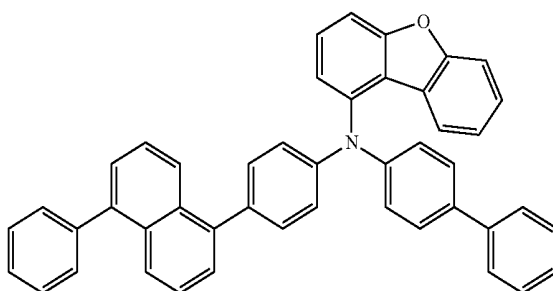


-continued

23

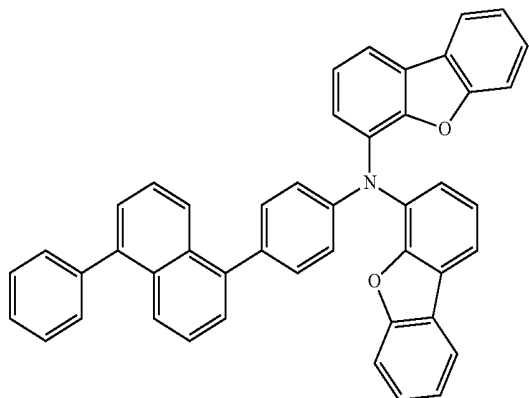


-continued


27

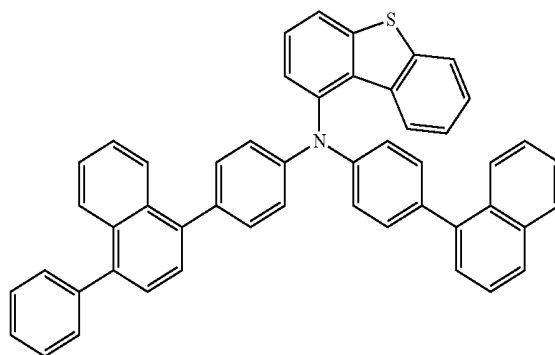


24

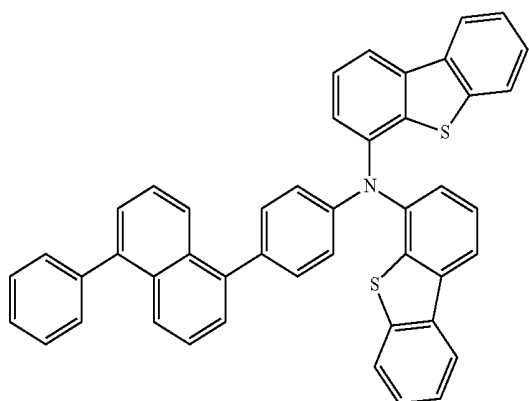


28

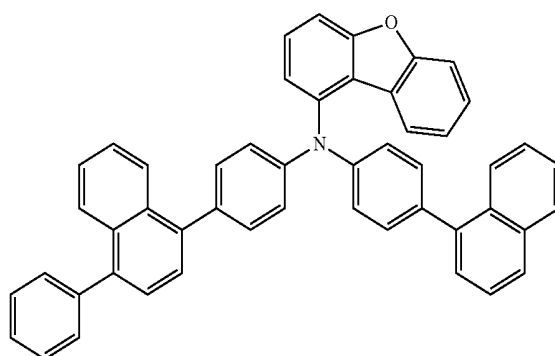


25

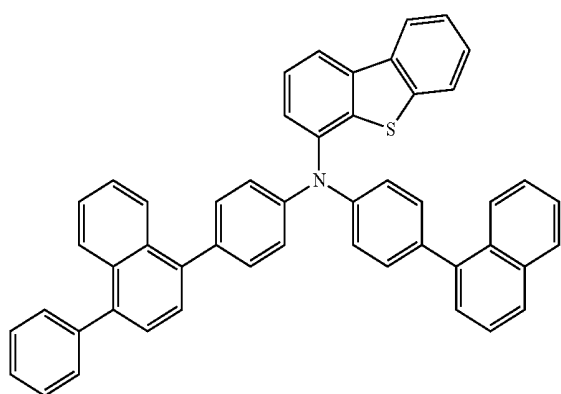


29

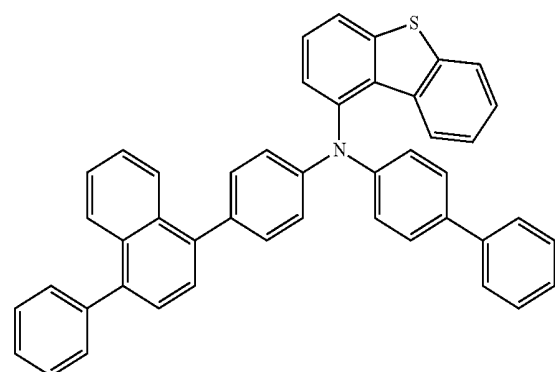





26

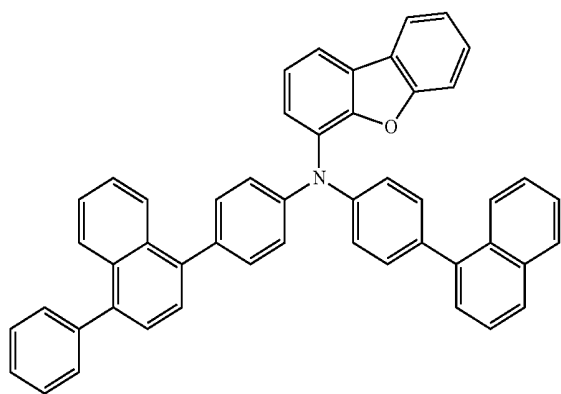





30

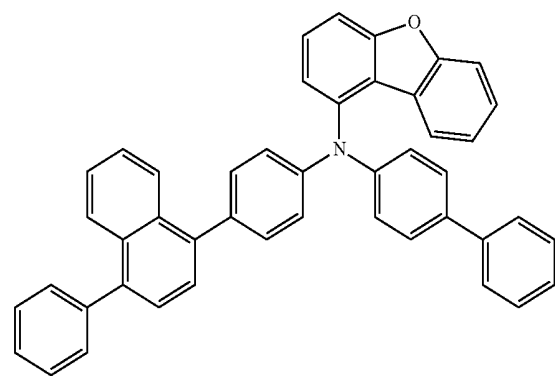


-continued

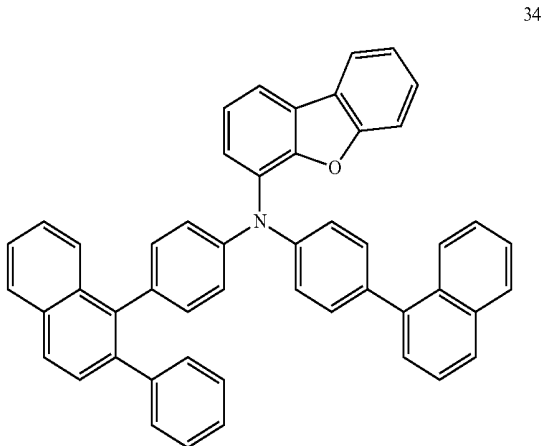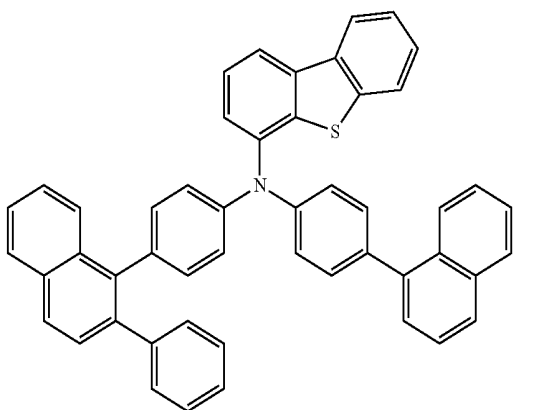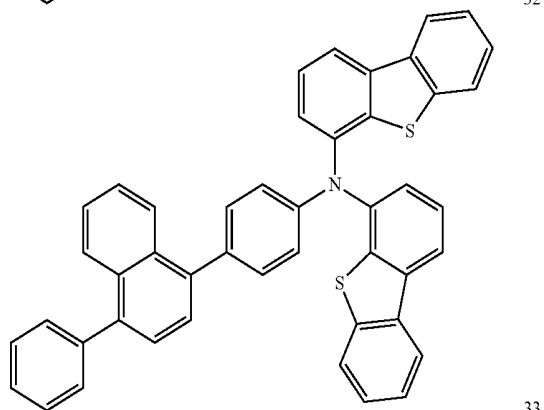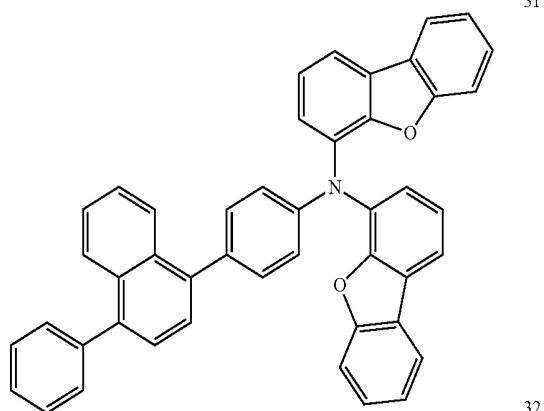


-continued

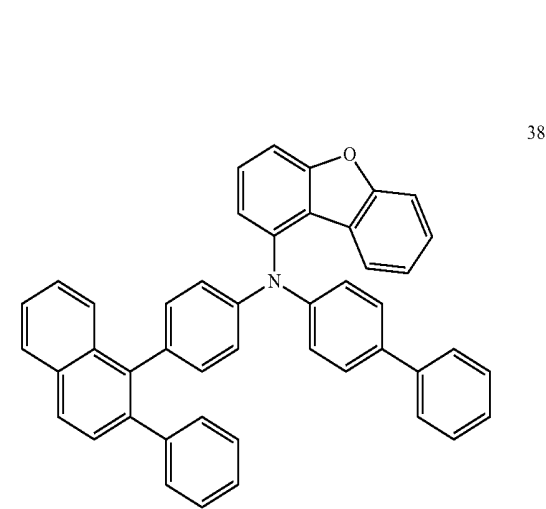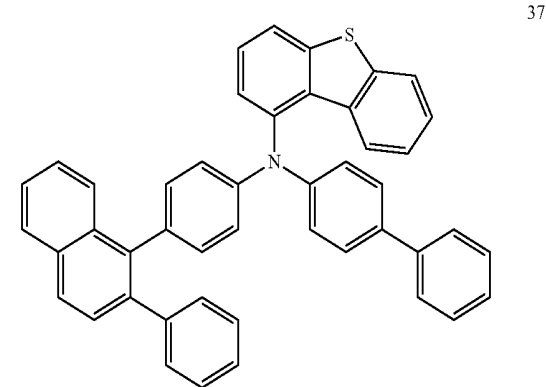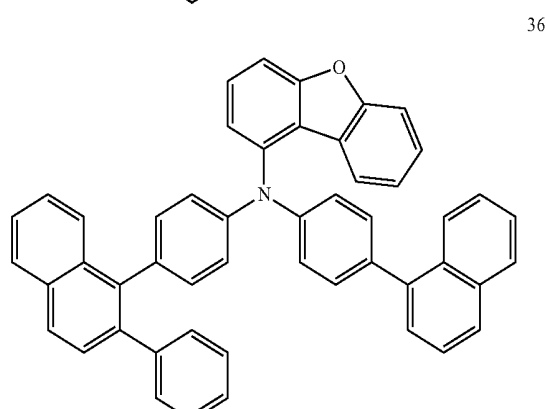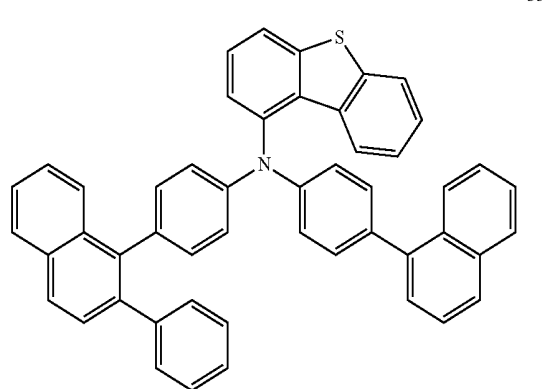


-continued

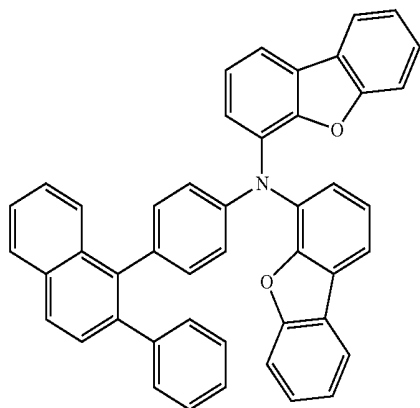


-continued

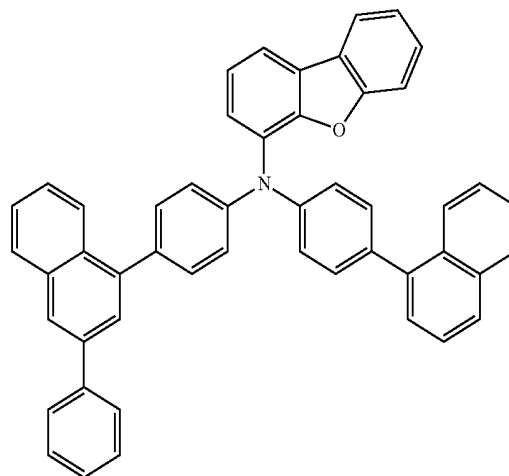


40

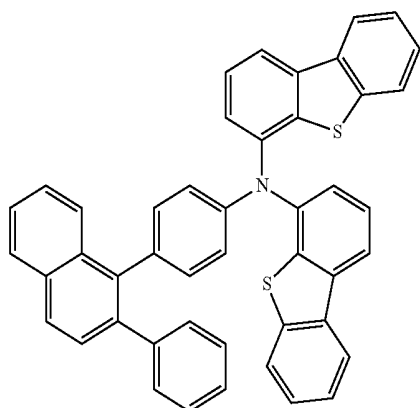


43

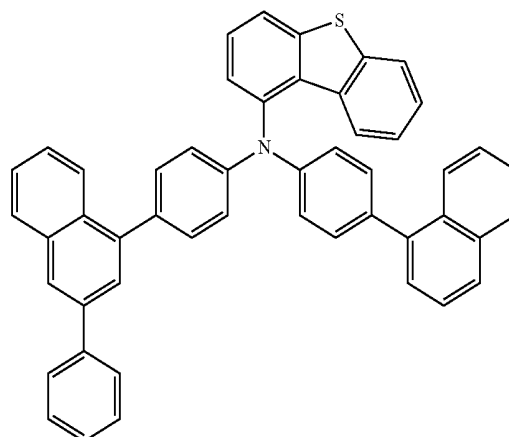


41

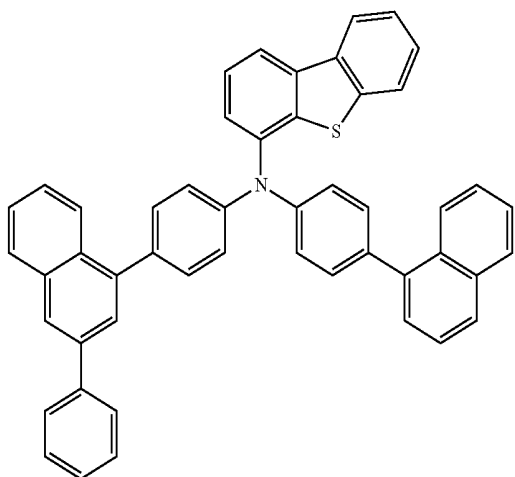


44

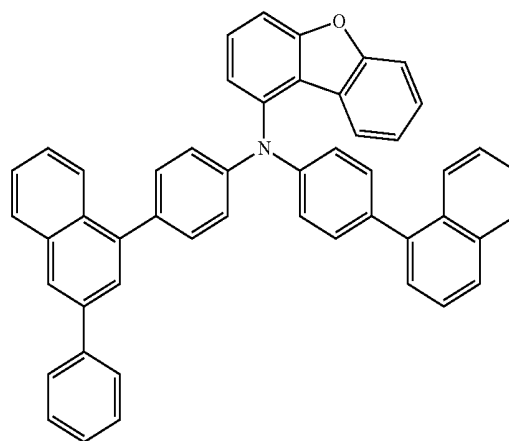


-continued

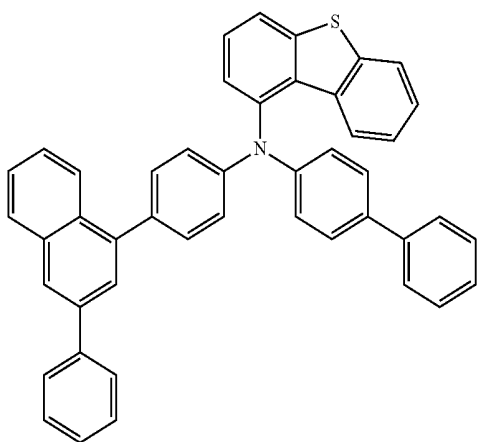


-continued

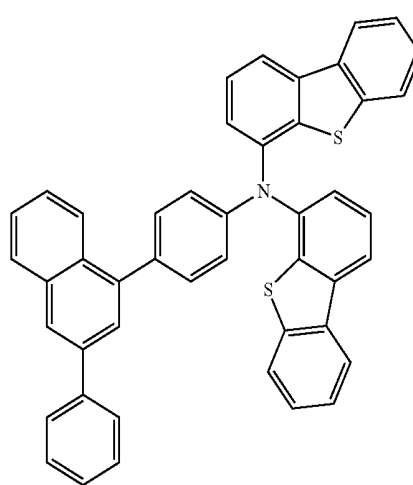


46

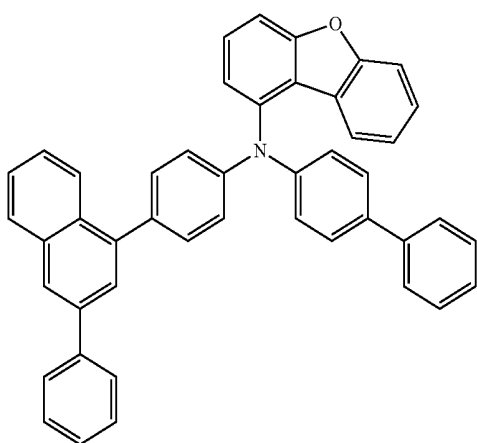


49

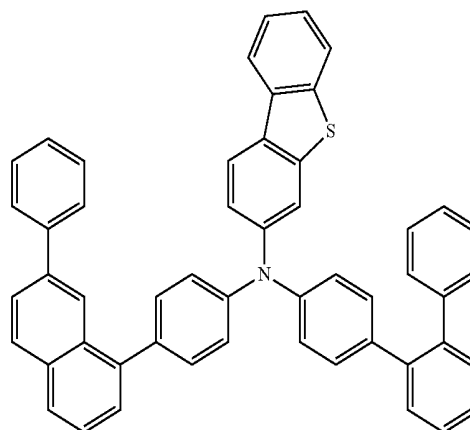

47

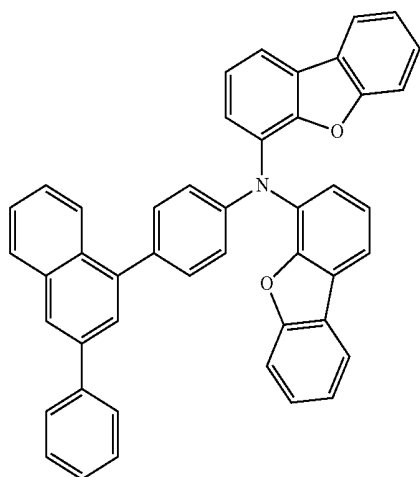


50

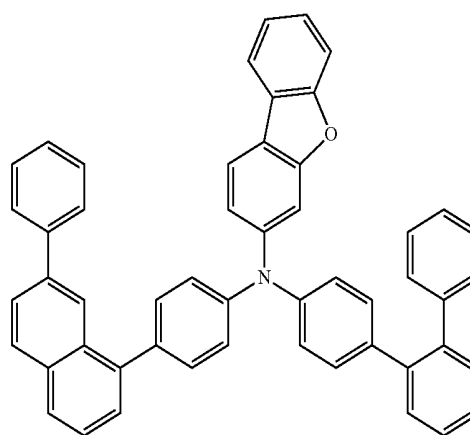


-continued

51

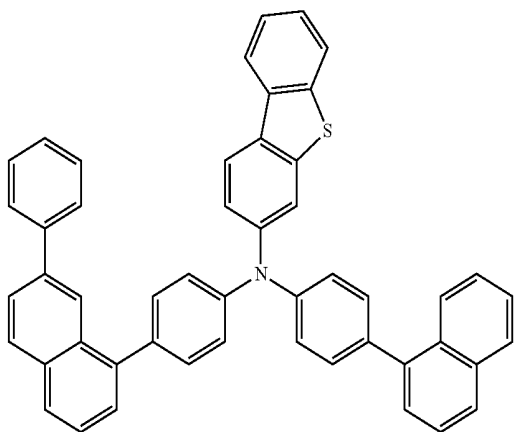



-continued

54

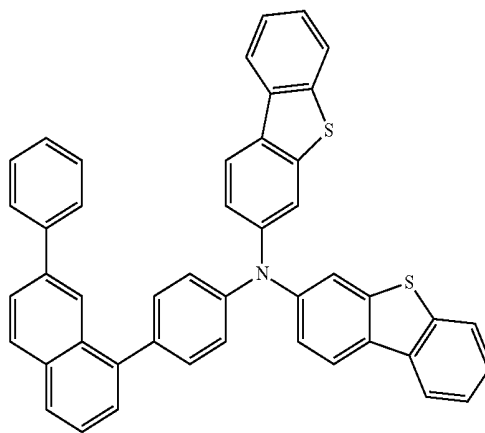



55

52

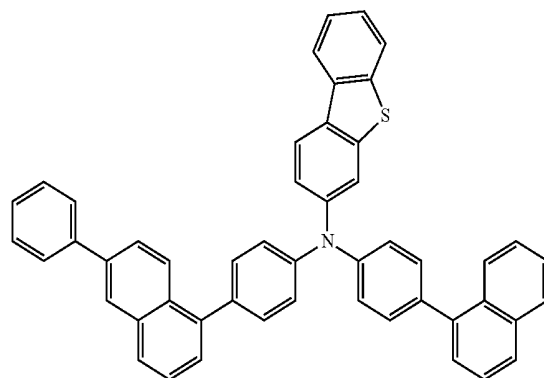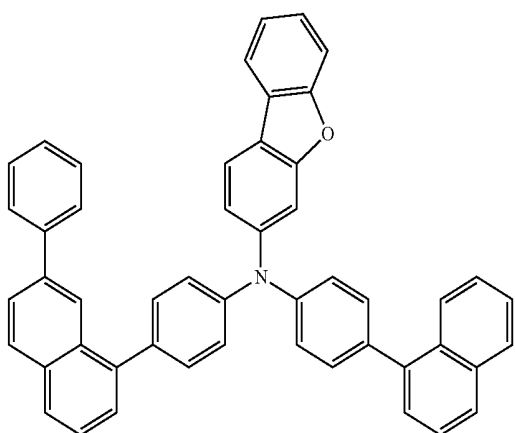


56

53

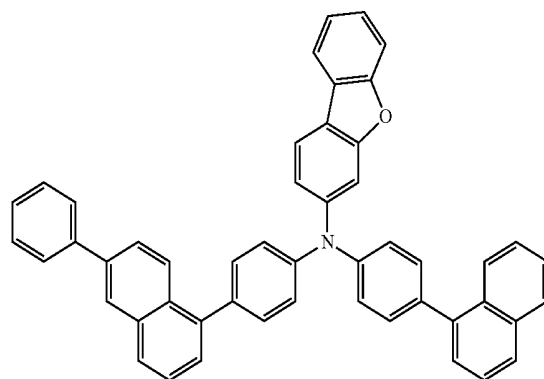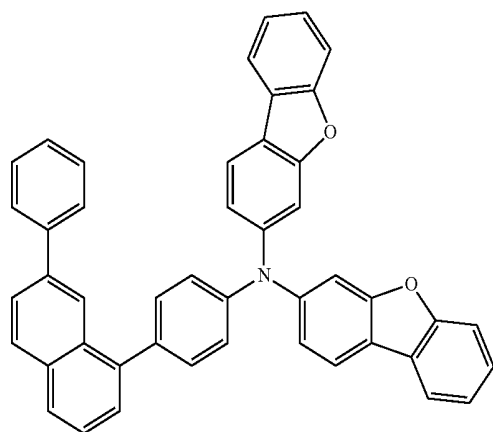


57

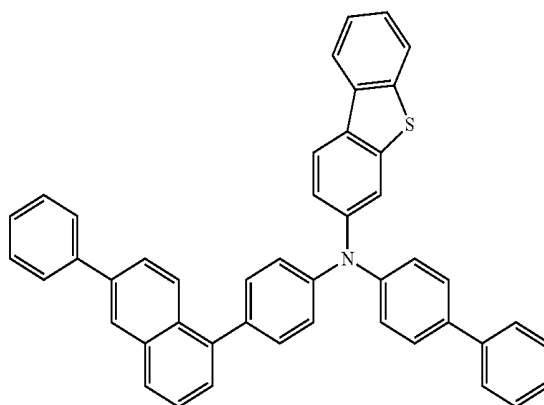

-continued


58

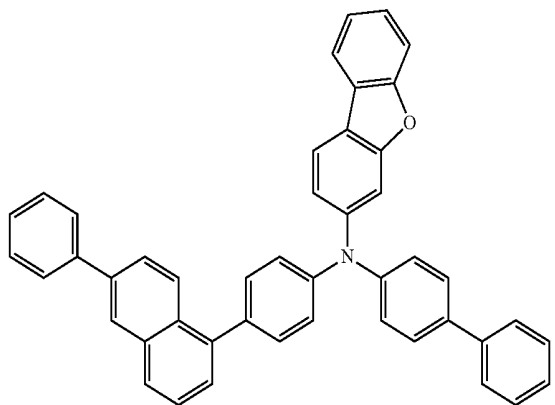


59

-continued


62

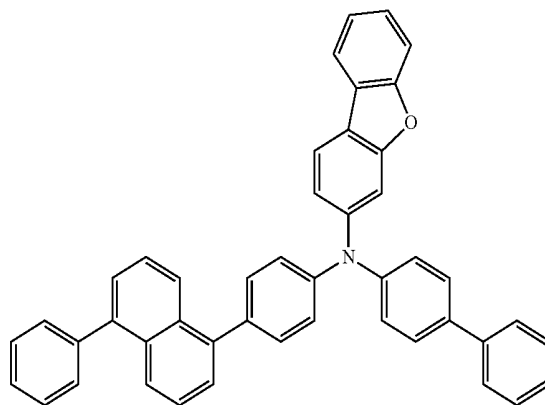


63

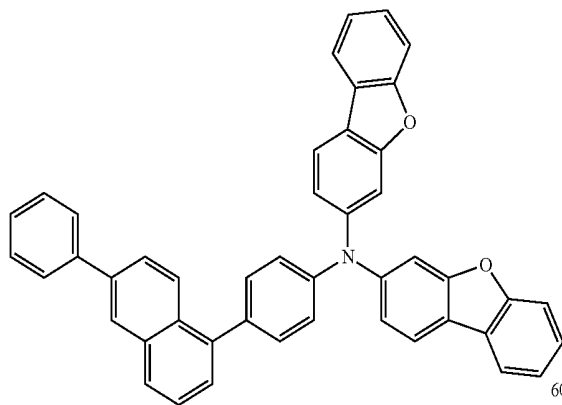


60

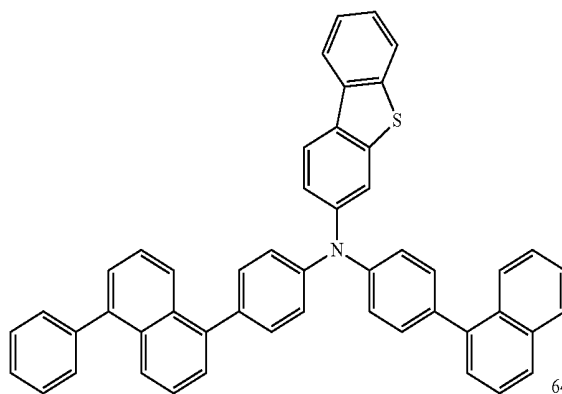



64

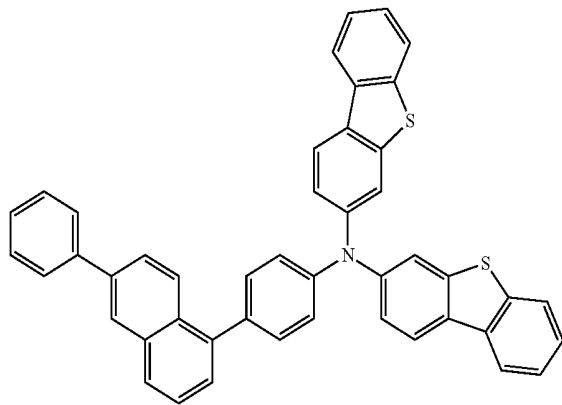

61

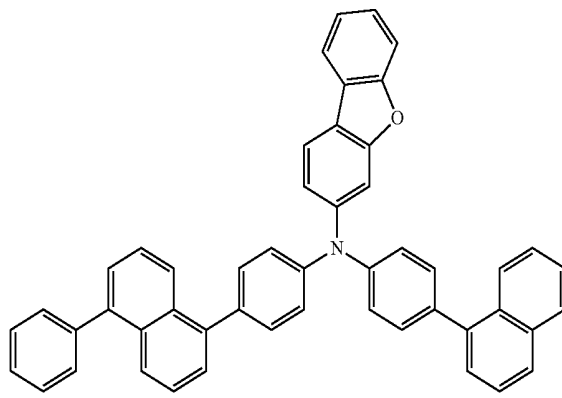


65

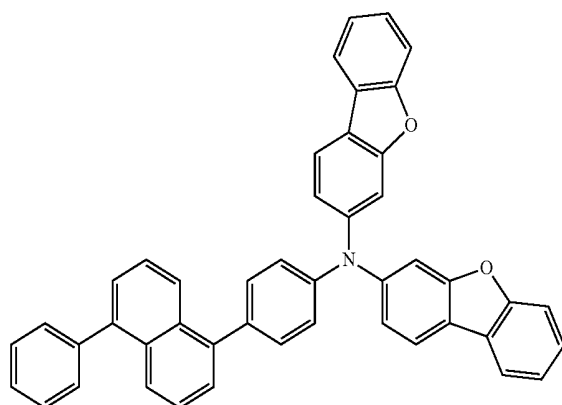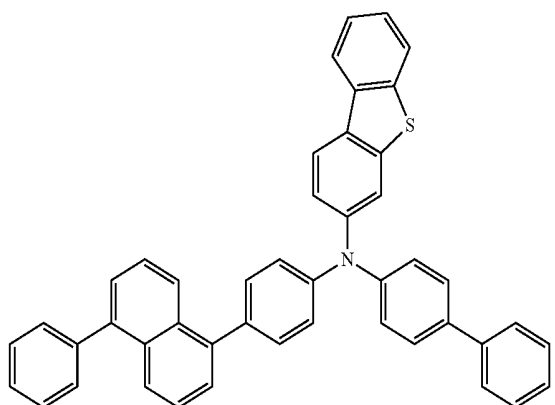


-continued

66

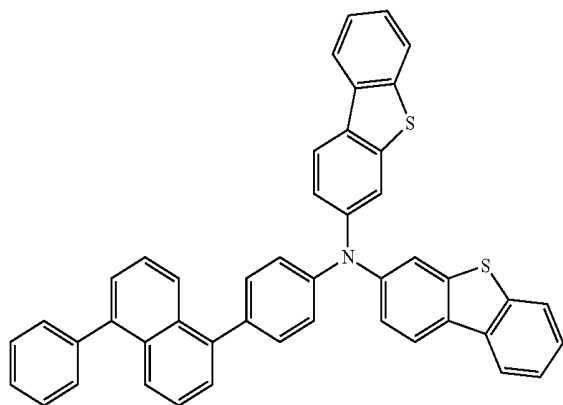



-continued

69

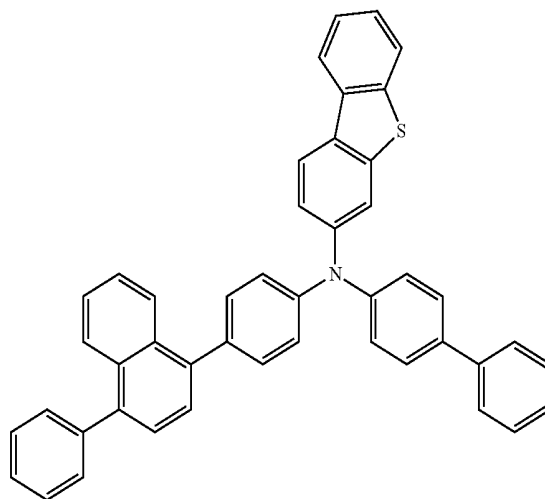


70


67

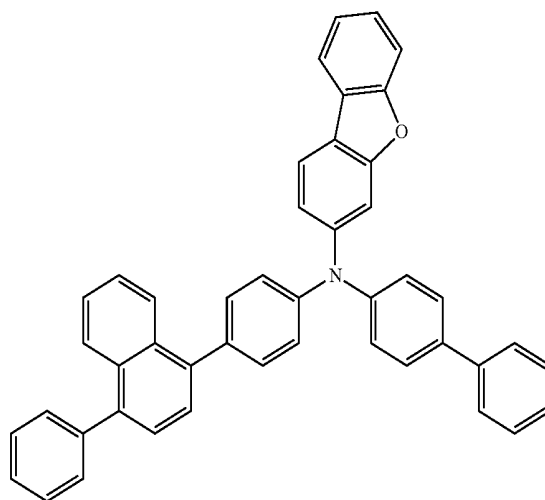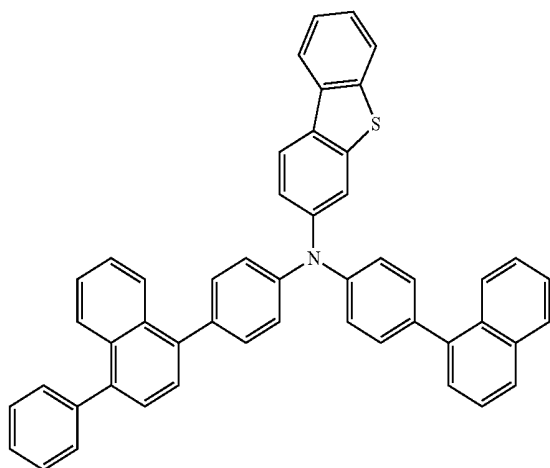

68

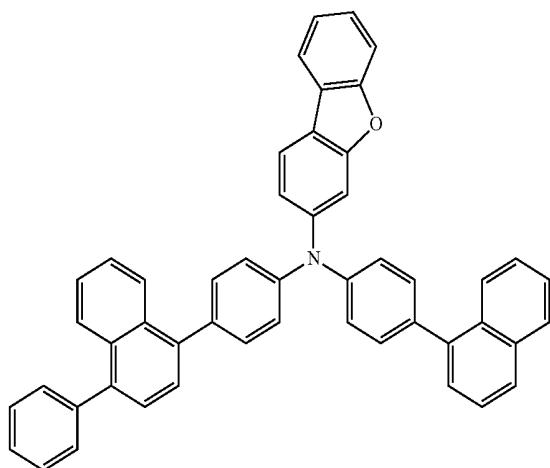


71

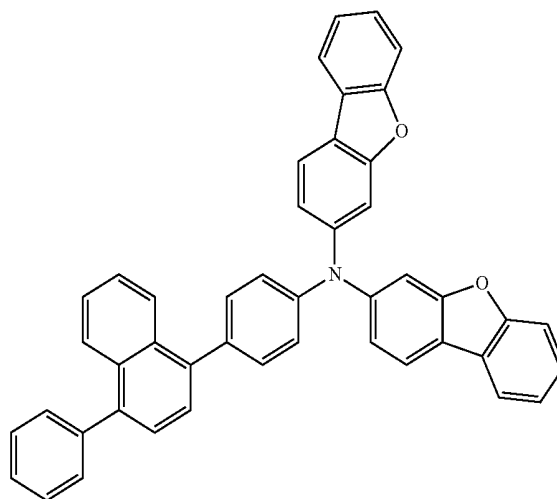


-continued


72

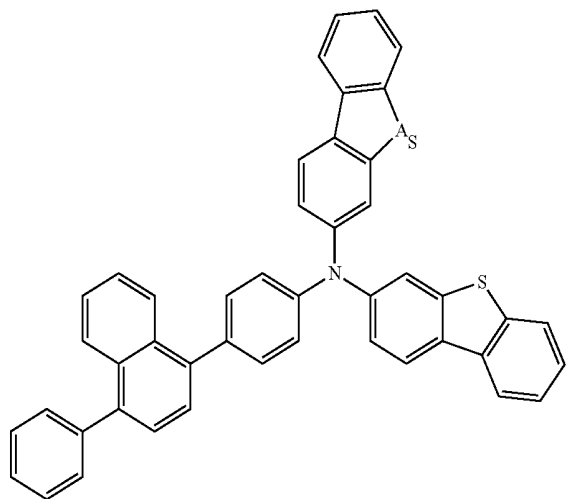

73

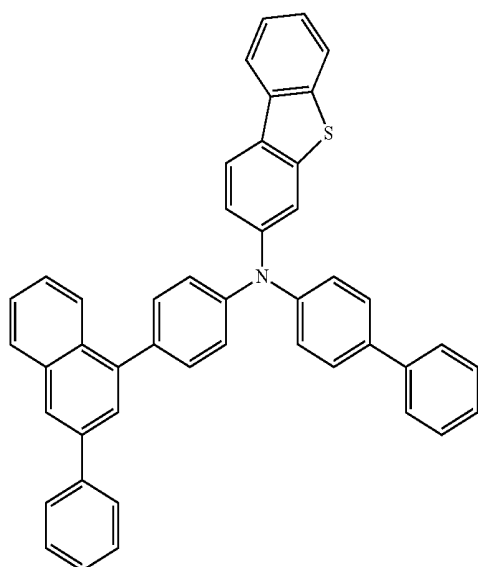


74

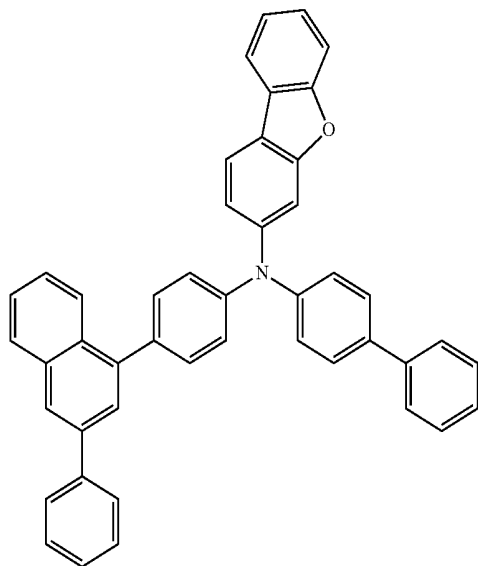


-continued


75

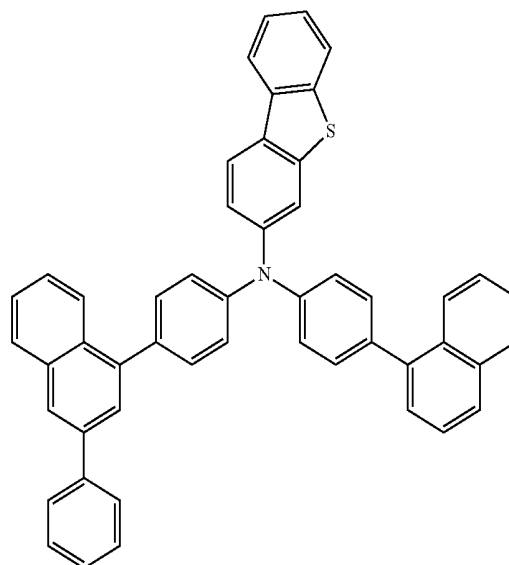

76

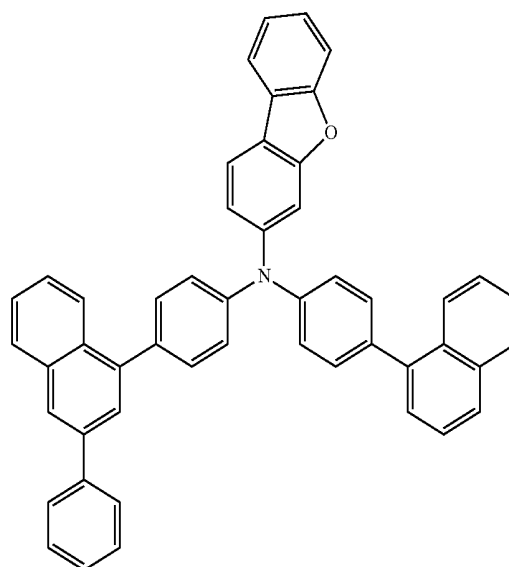


77

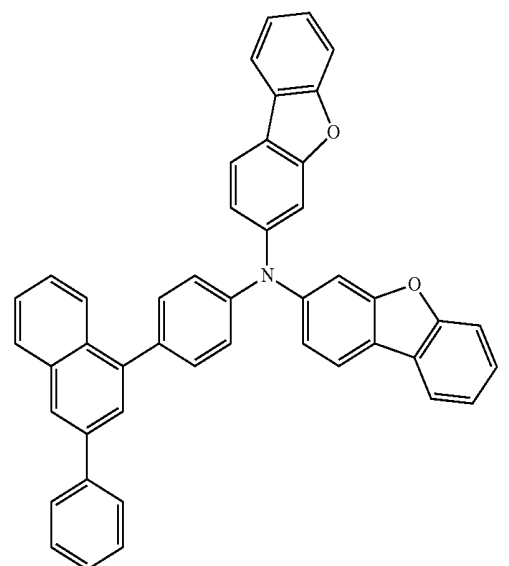


-continued

78

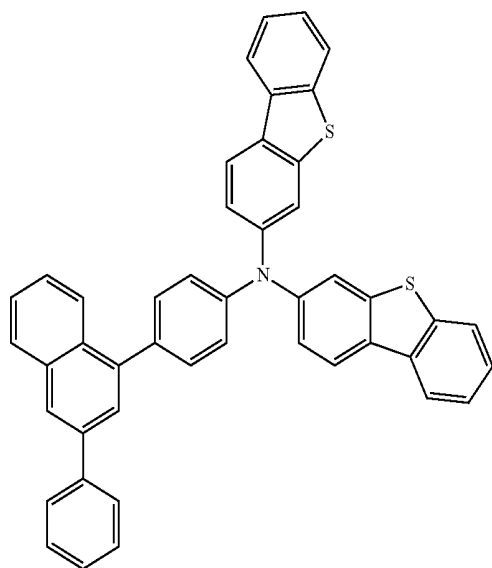


-continued


81

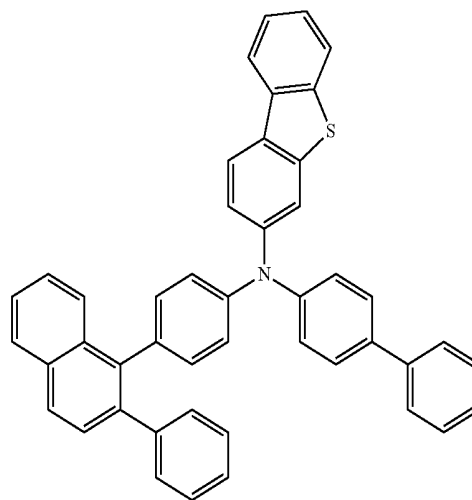


79

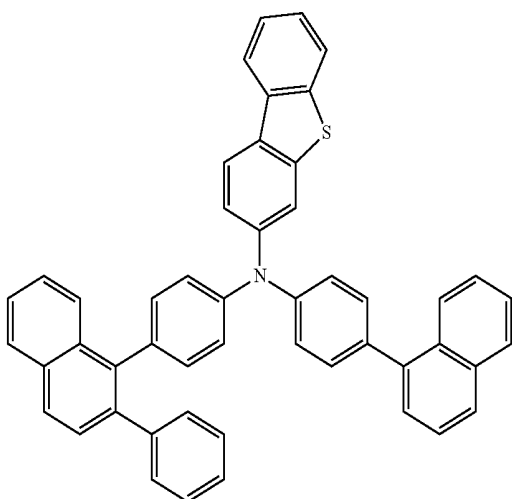


82

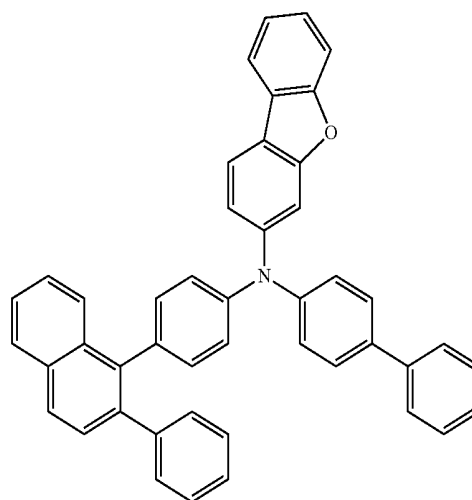


80

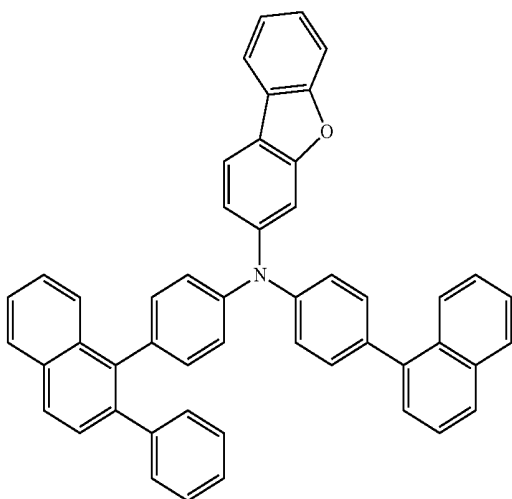

83

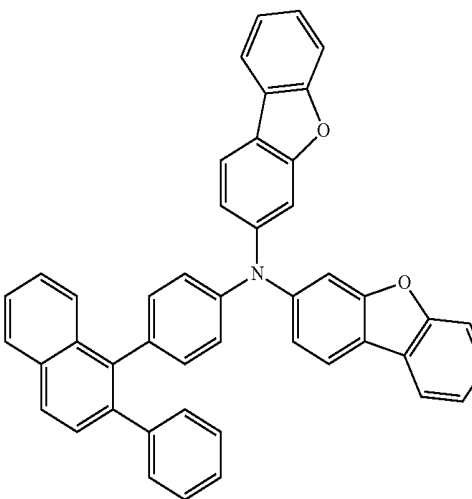


-continued

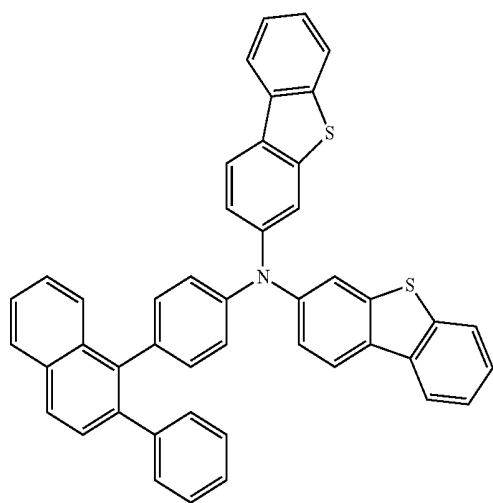


84


-continued

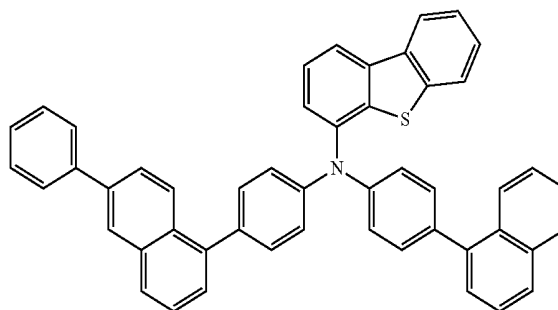


88

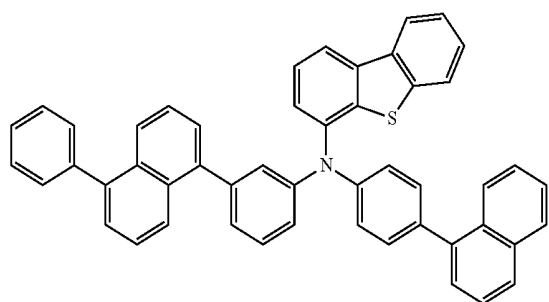


85

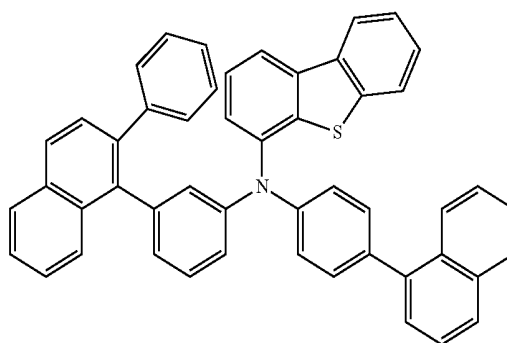


89

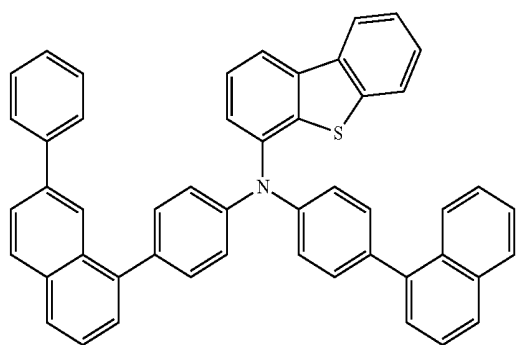


86

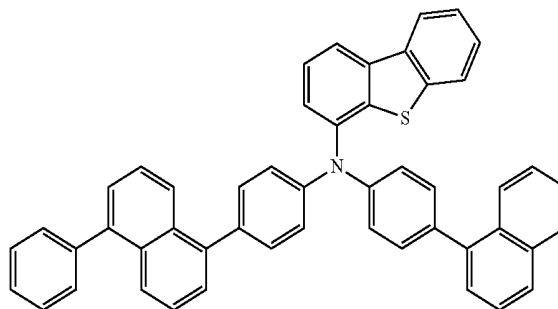

90

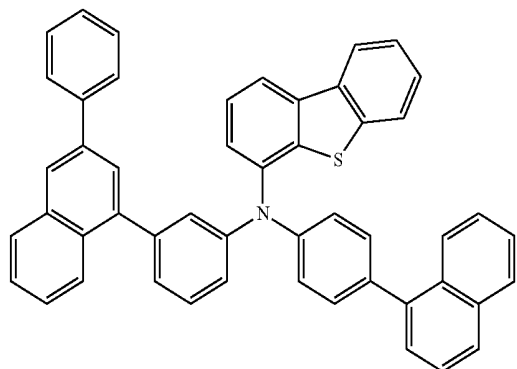


87

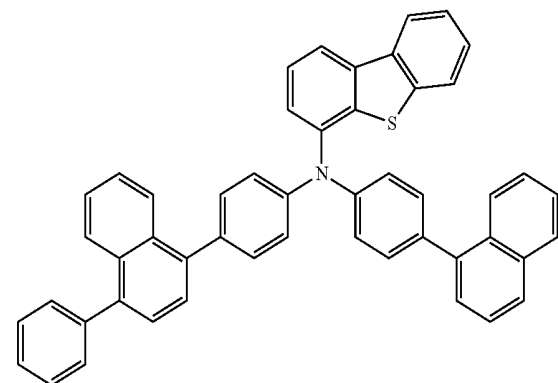


91

-continued


92

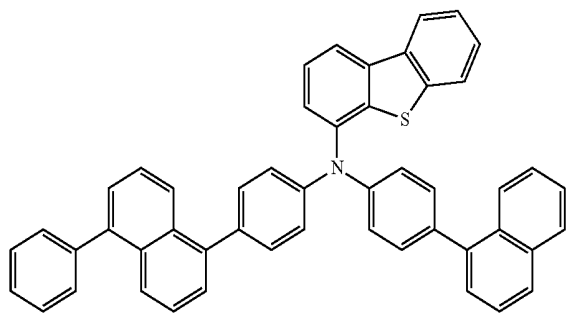


93

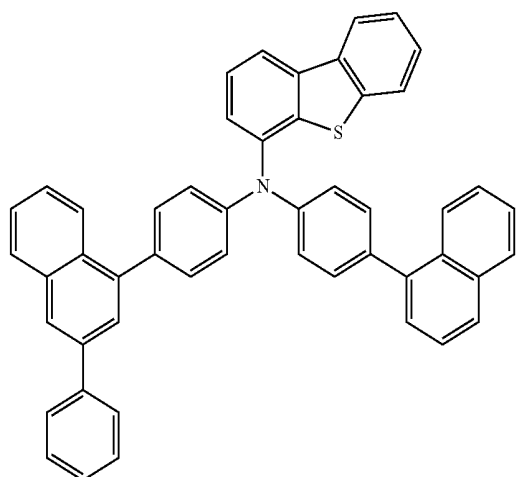

94

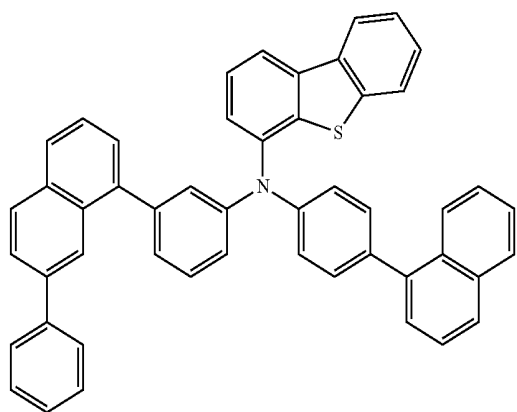


95

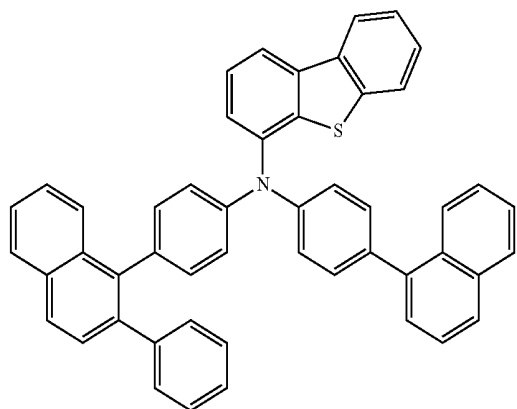


-continued


96

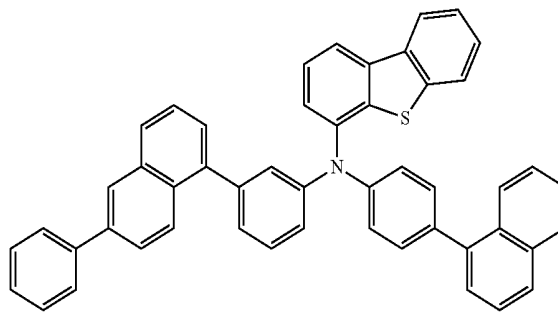


97

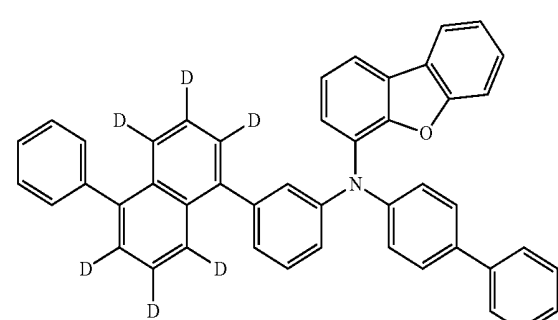

98

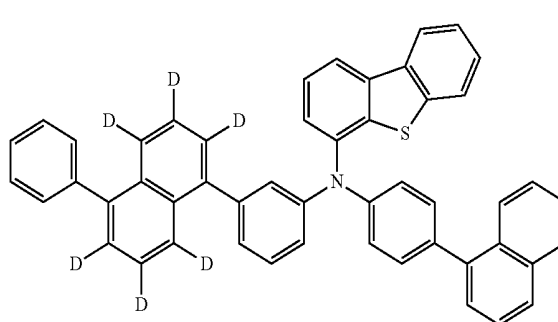


99

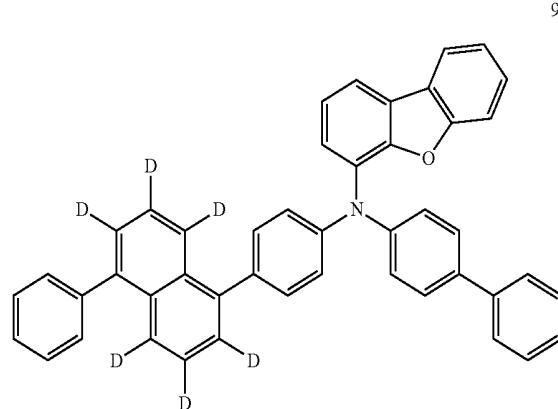


-continued


100

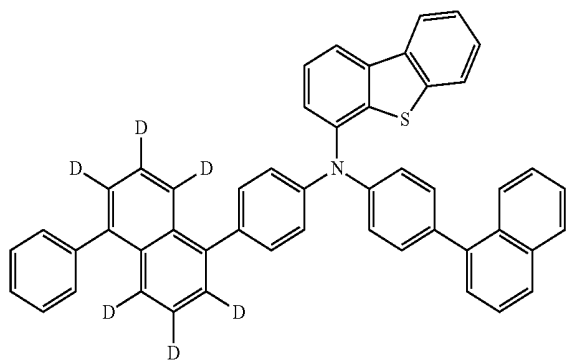


101

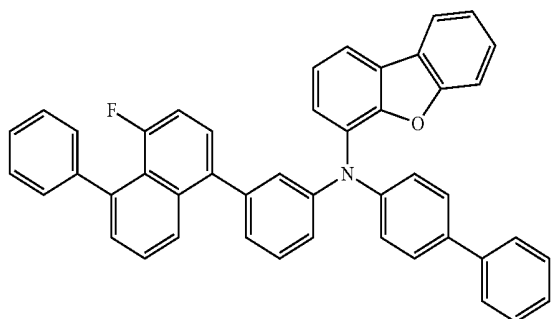

102

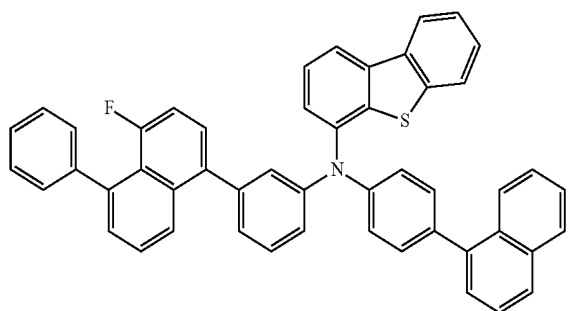


103

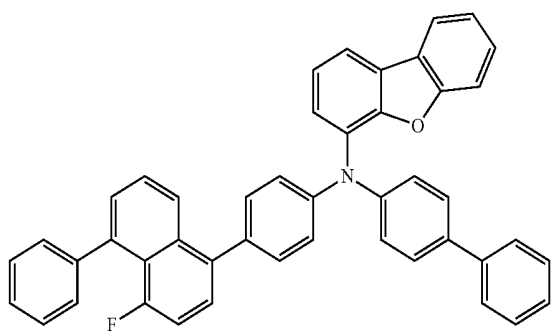


-continued


104

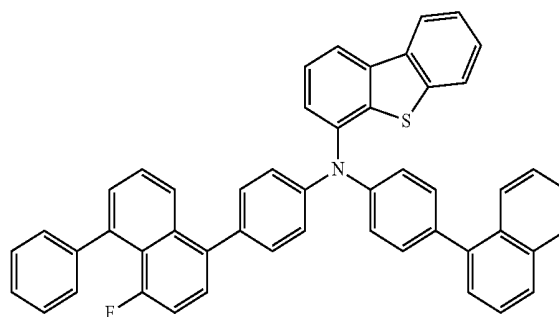


105

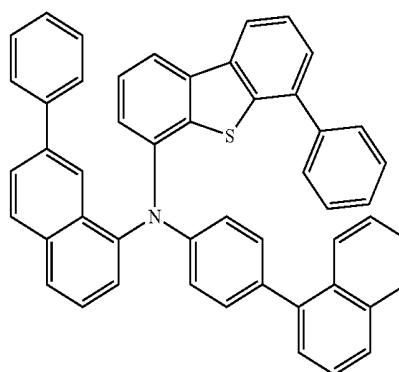

106

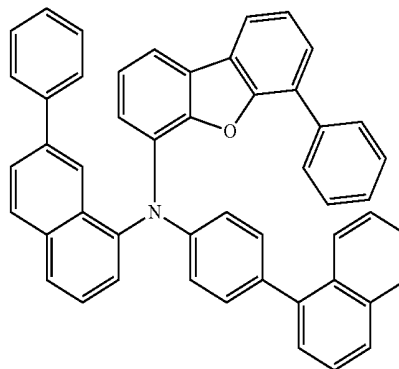


107

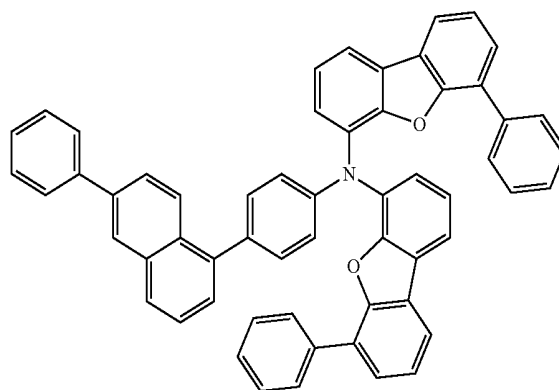


-continued


108

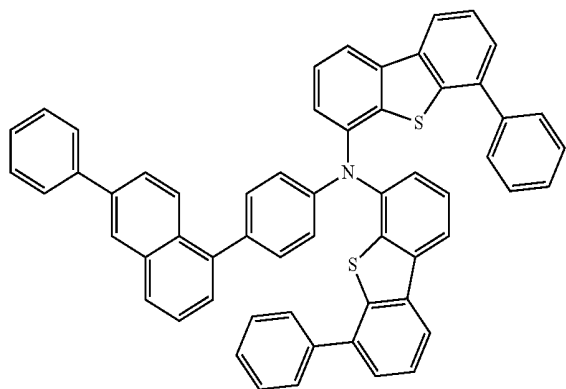


109

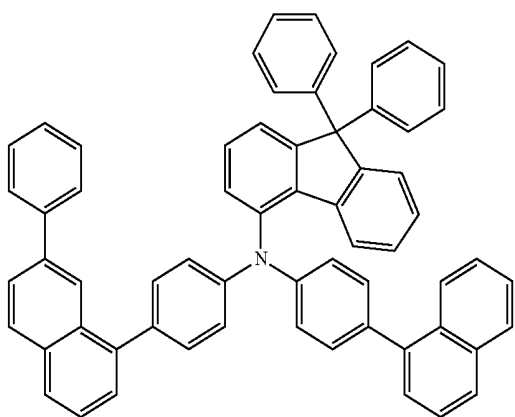

110

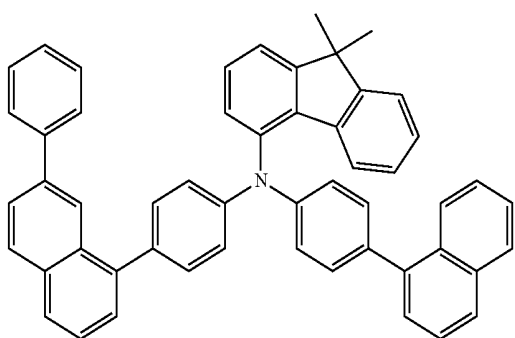


111

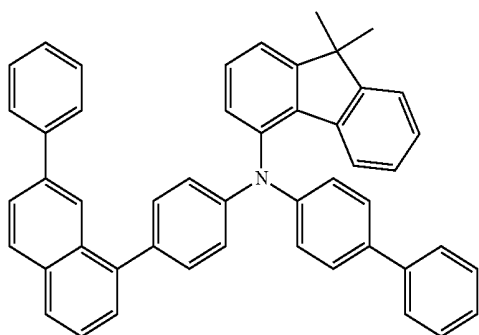


-continued


112

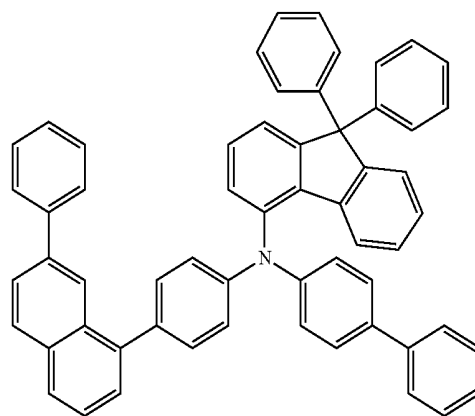


113

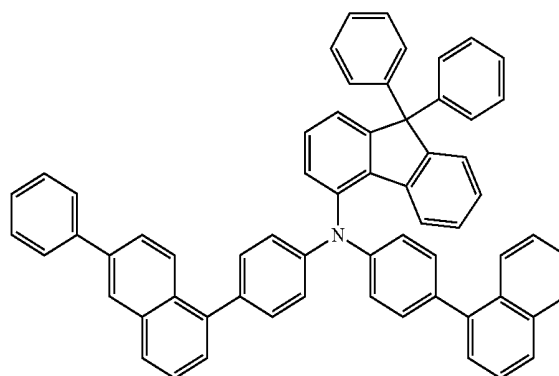

114

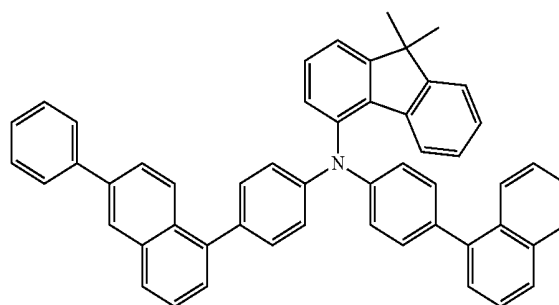


115

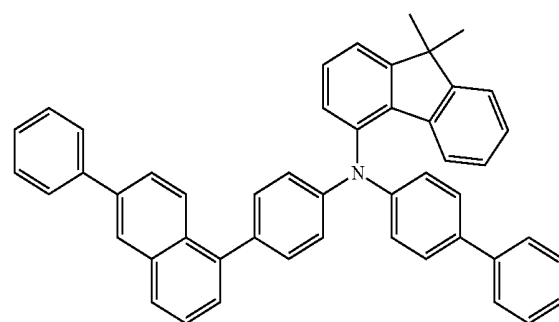


-continued


116

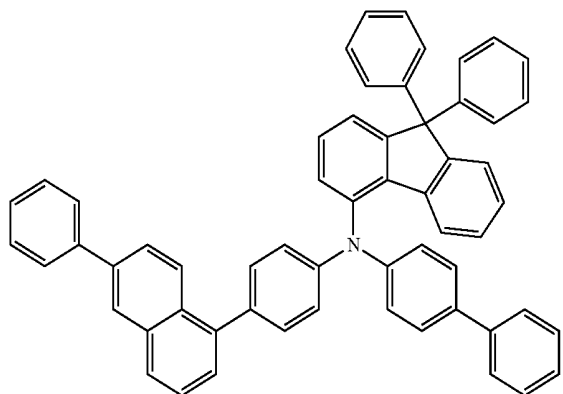


117

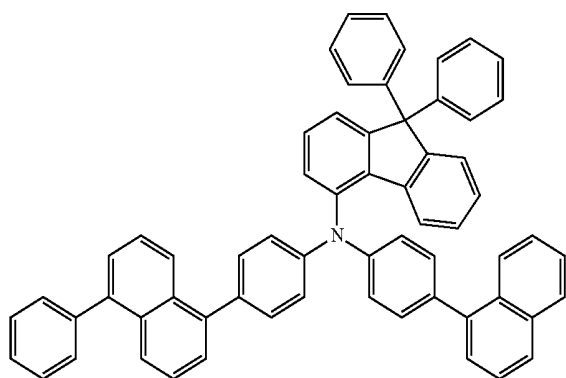

118

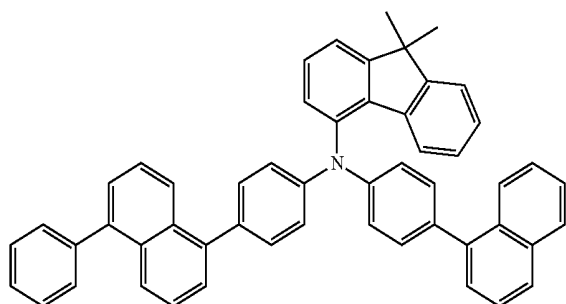


119

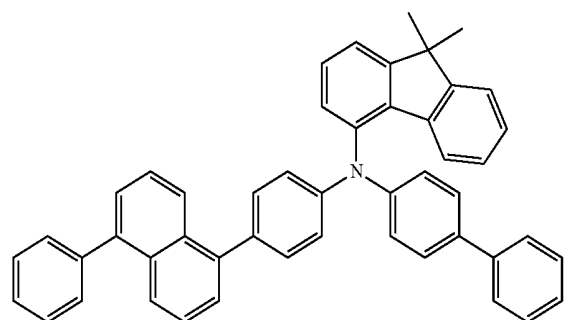


-continued


120

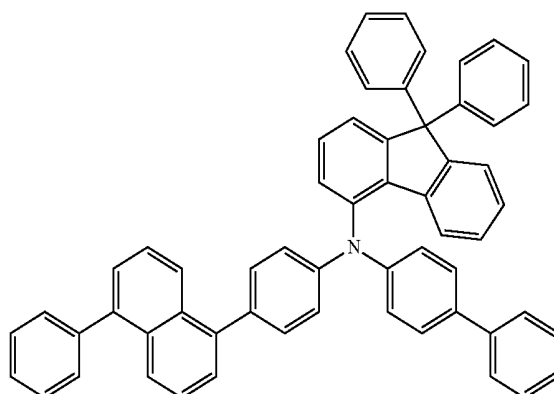


121

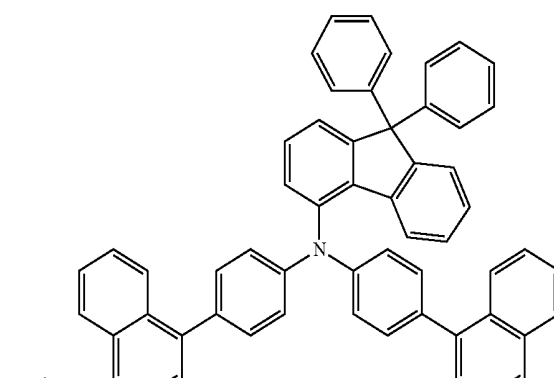

122

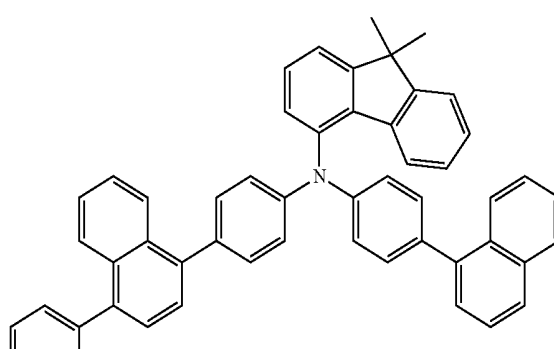


123

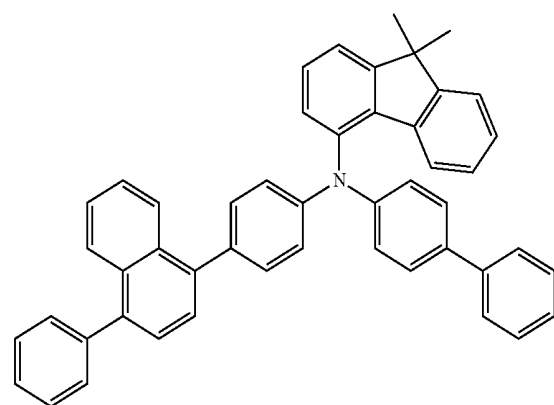


-continued

124

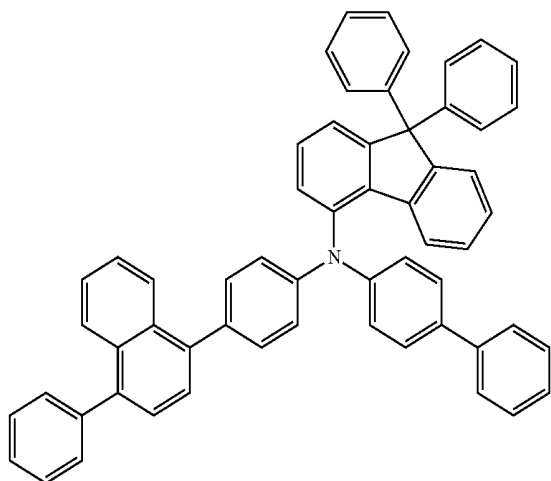


-continued


127

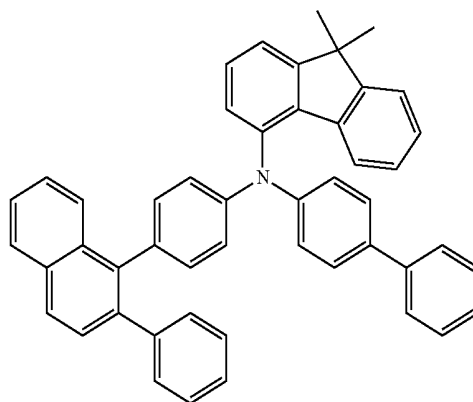


125

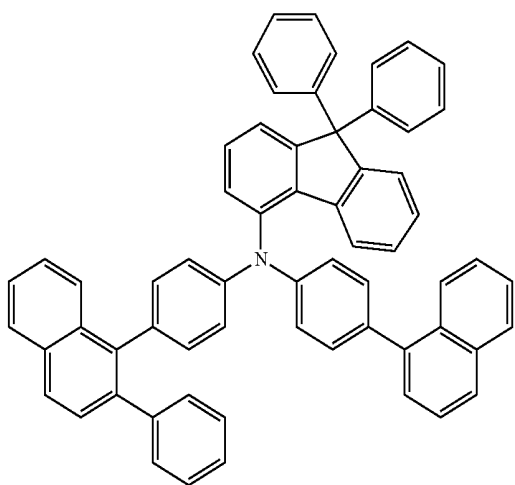


128

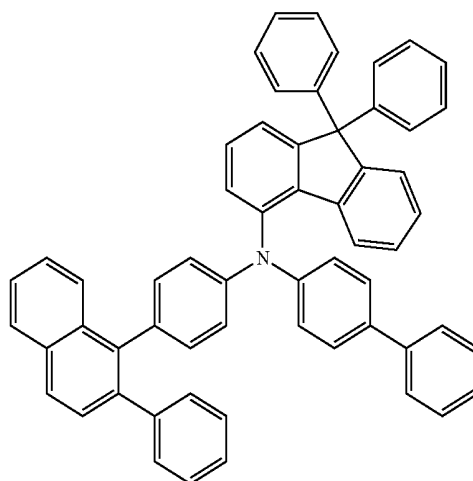

126

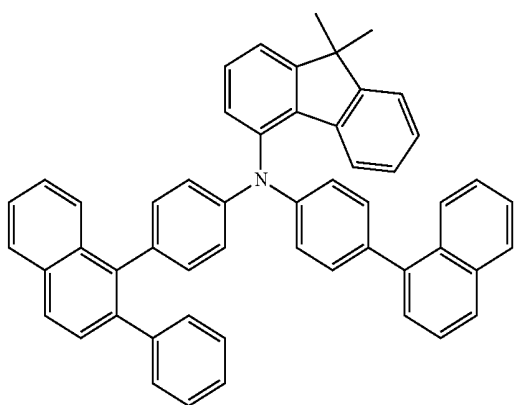


129

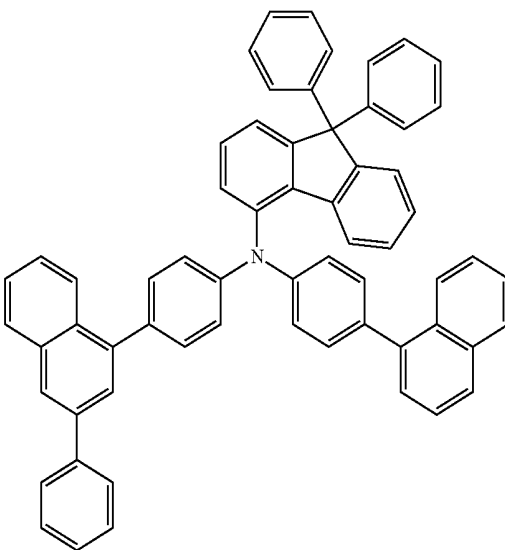


-continued

130

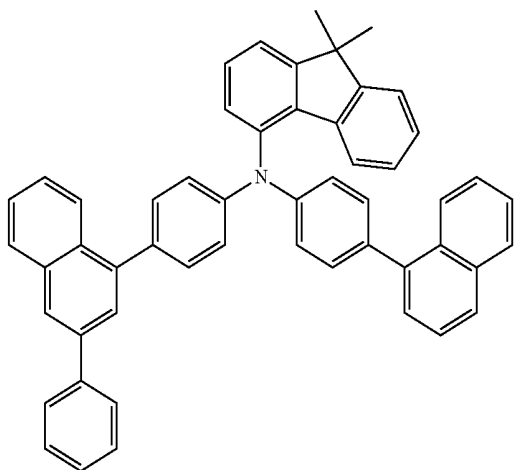



-continued

133

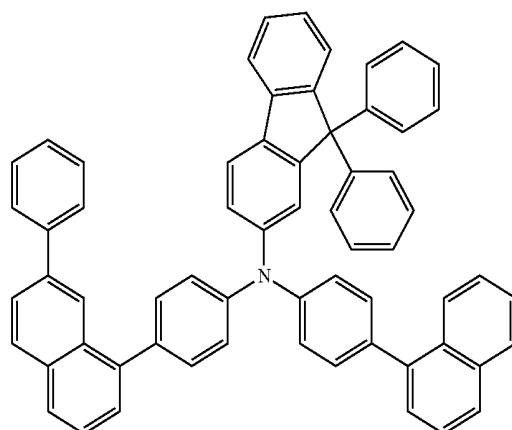



134

131

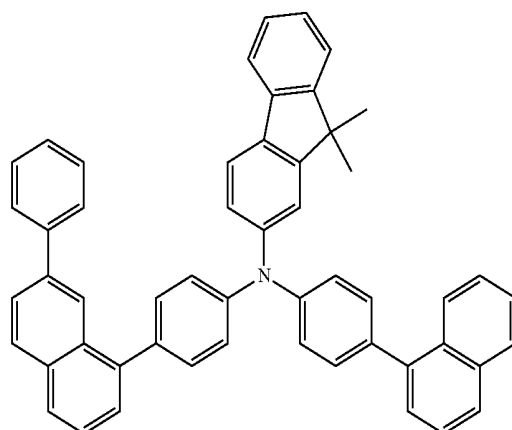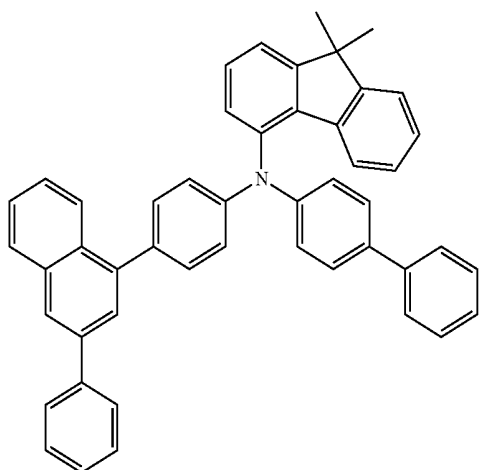

135


132

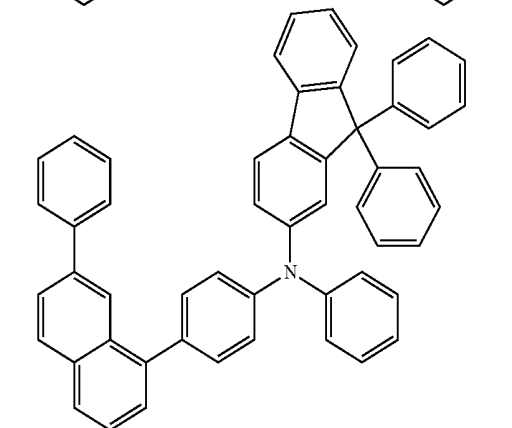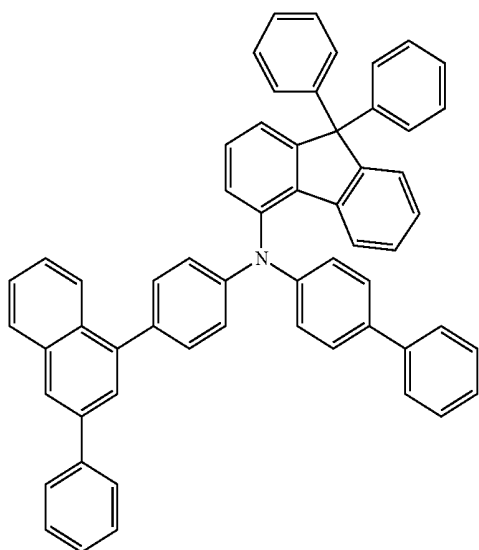


136

-continued


137

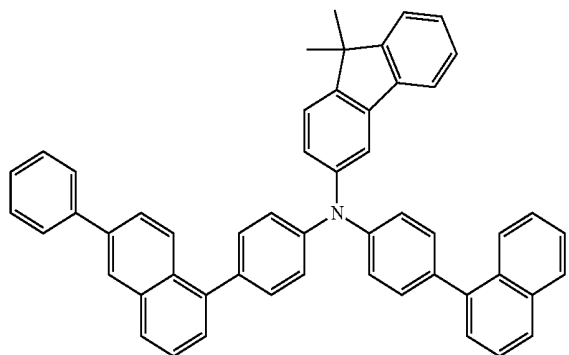


138

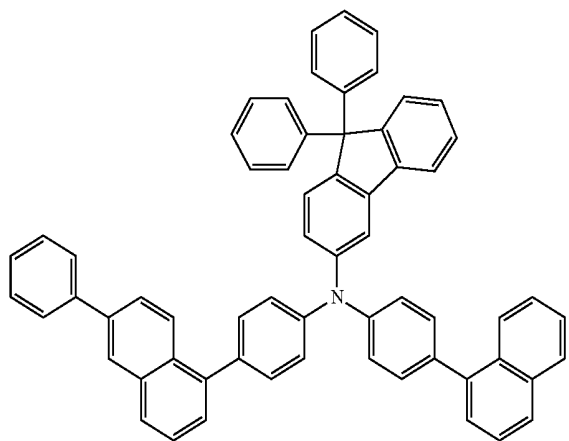

139

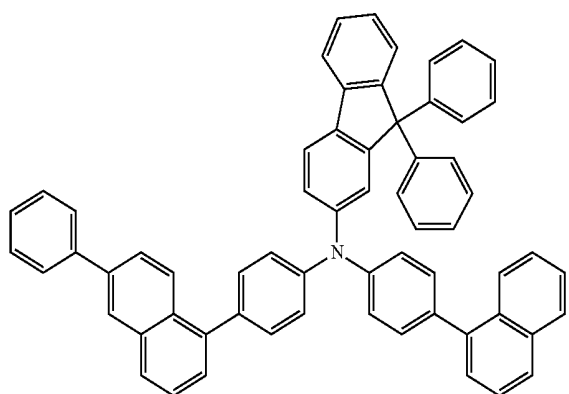


140

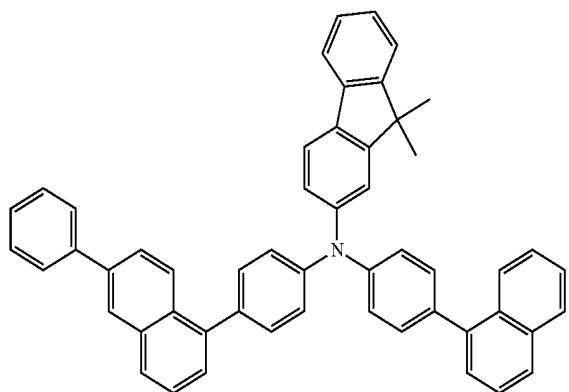


-continued


141

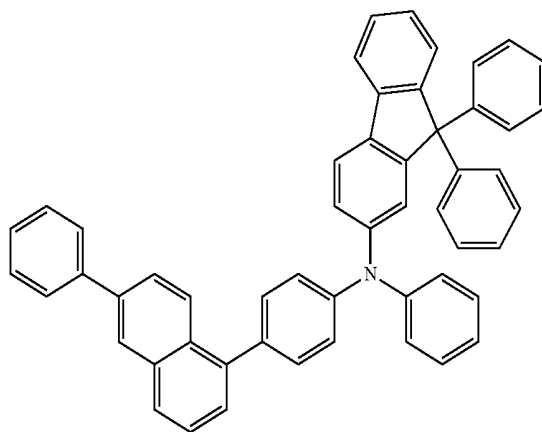

142

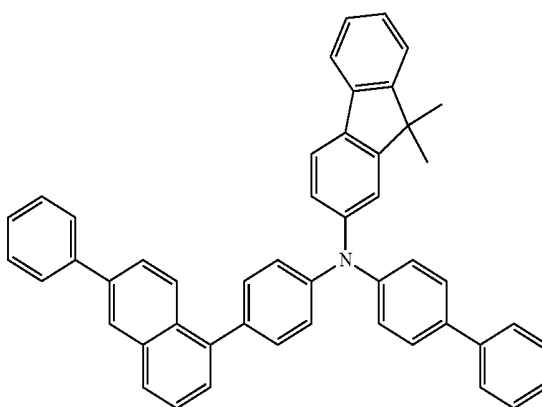


143

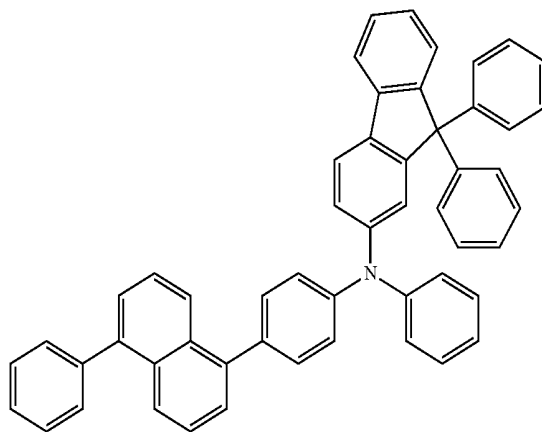


-continued


144

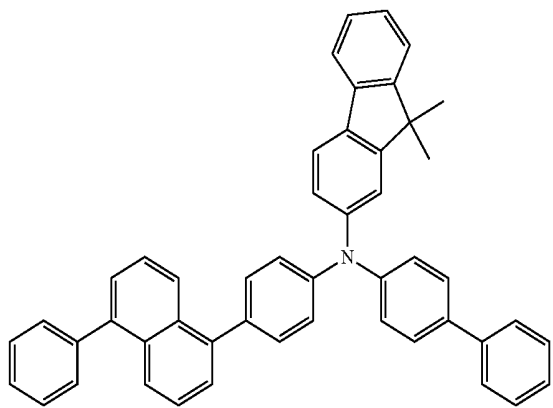


145

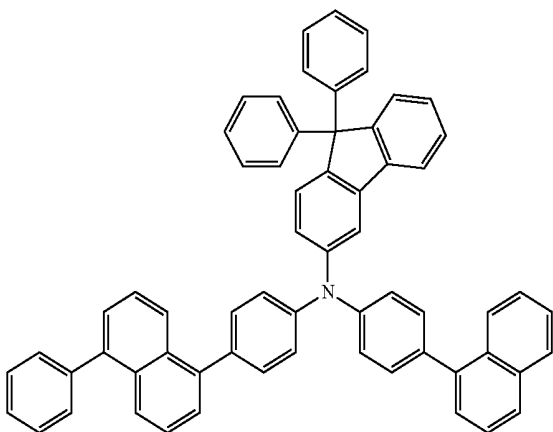

146

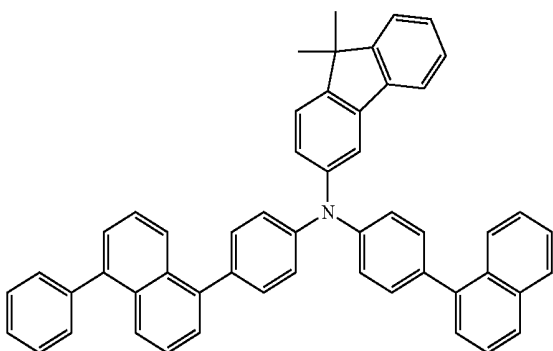


147

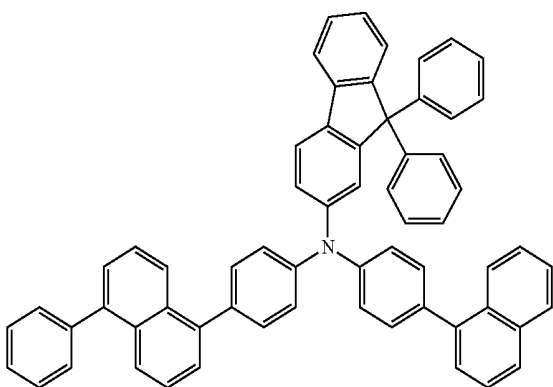


-continued


148

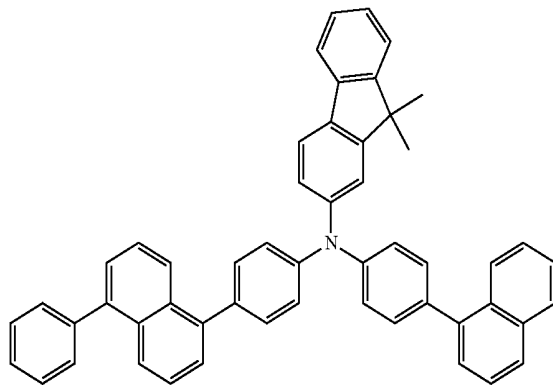

149

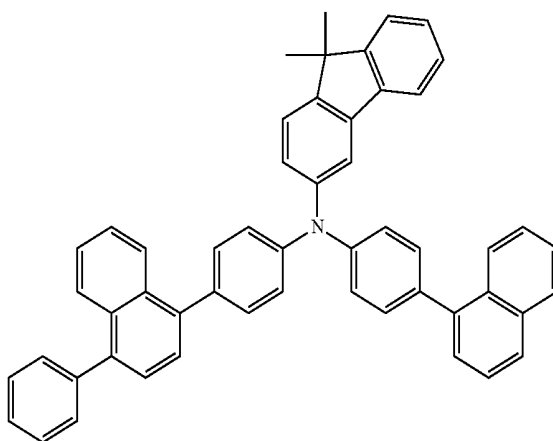


150

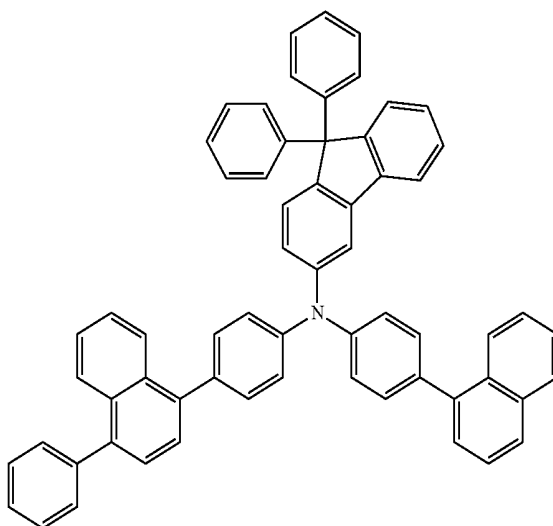


-continued


151

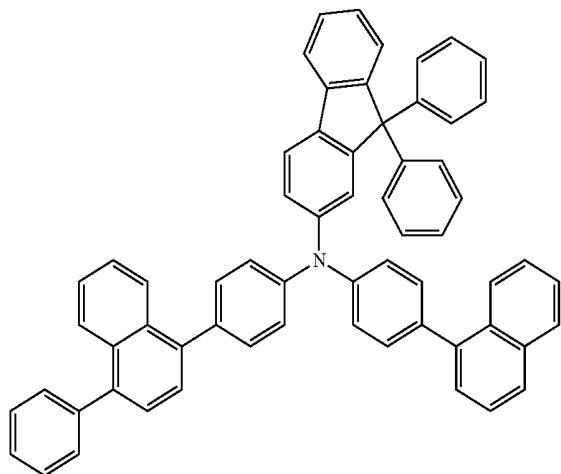

152

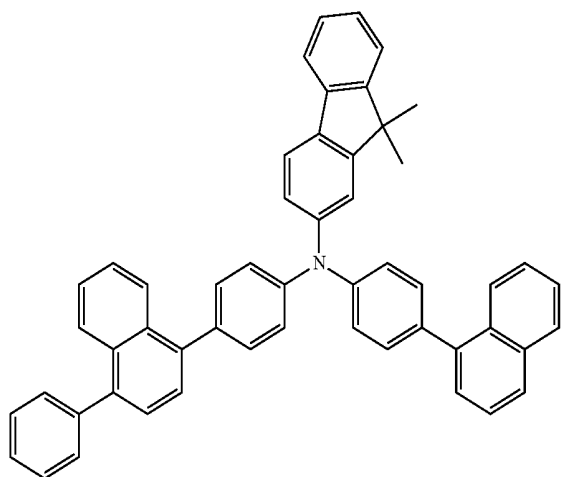


153

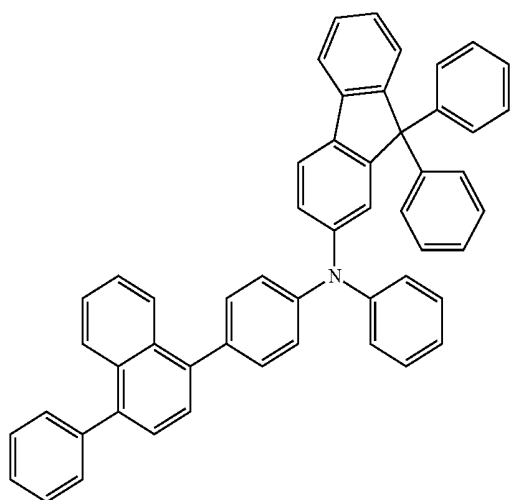


-continued


154

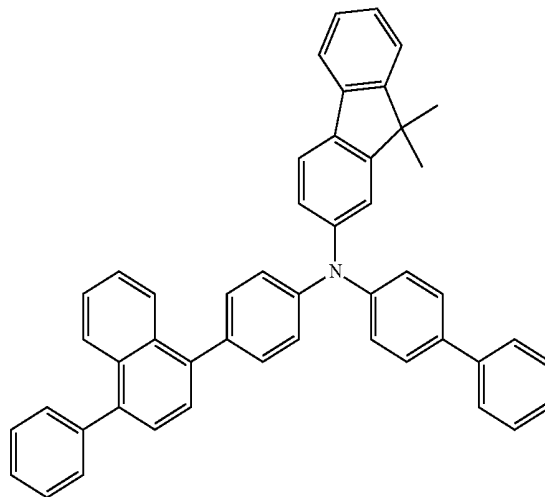

155

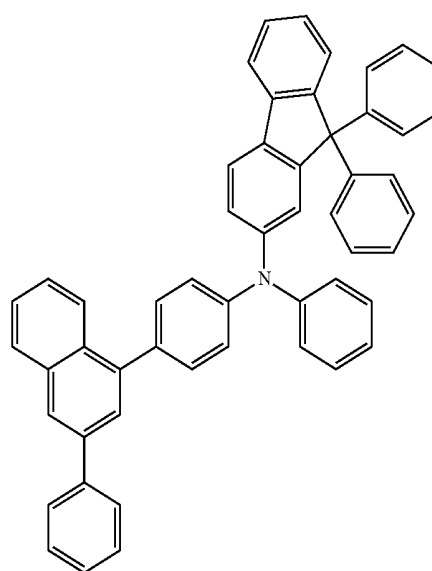


156

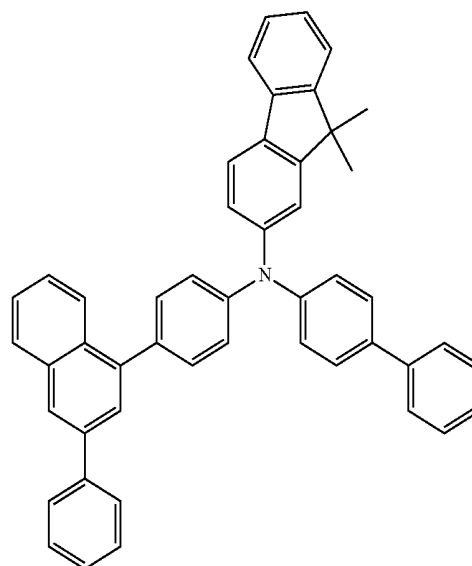


-continued


157

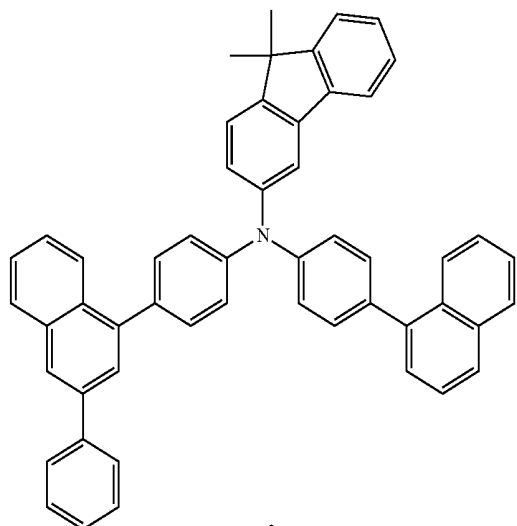

158

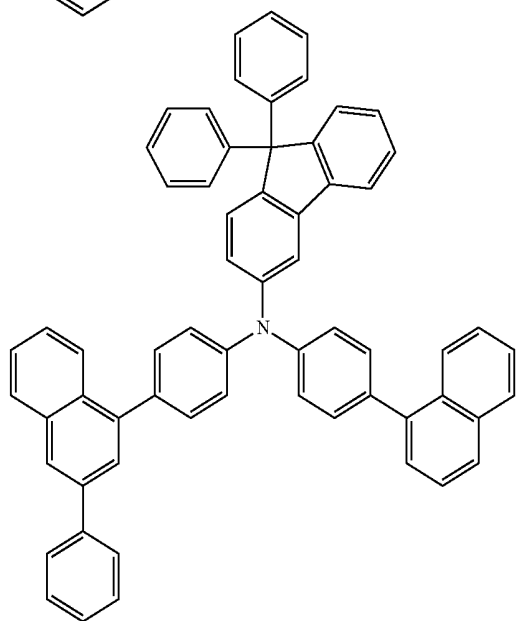


159

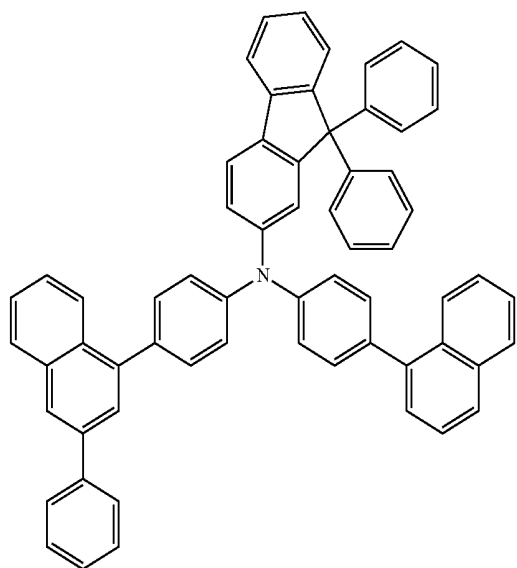


-continued


160

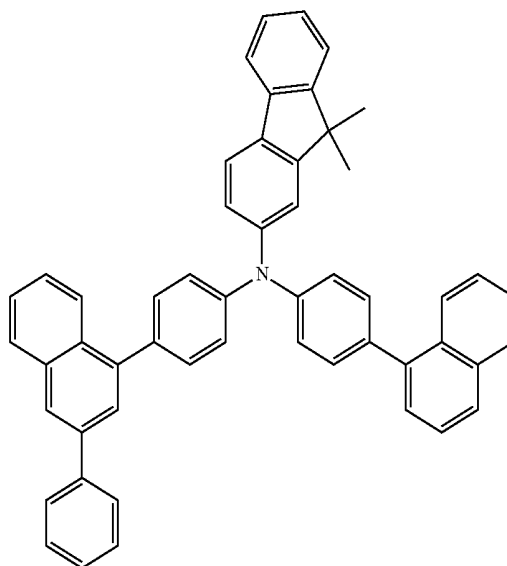

161

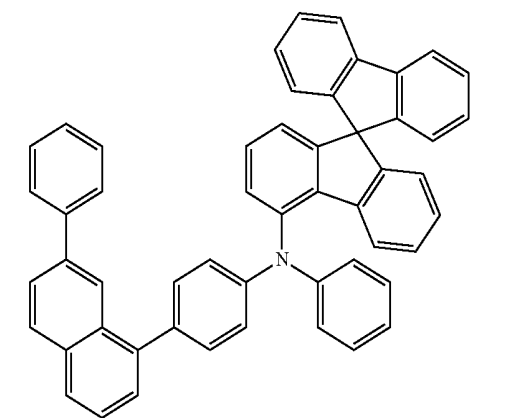


162

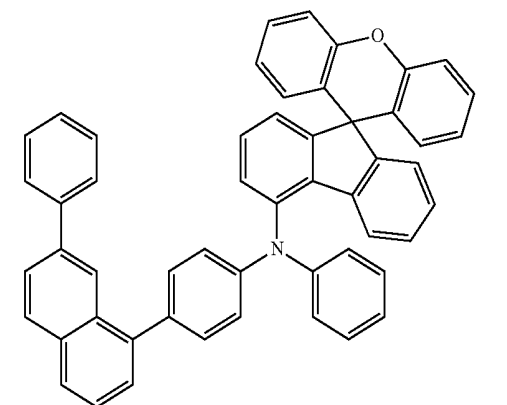


-continued


163

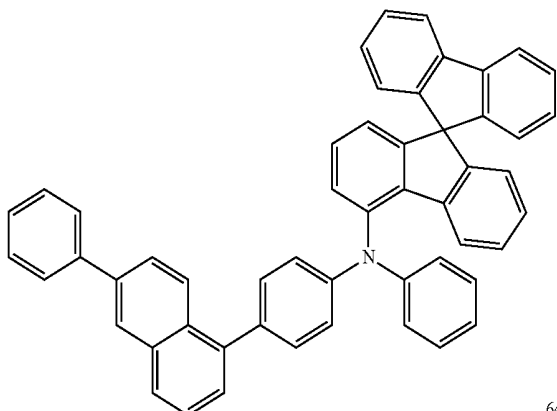


64

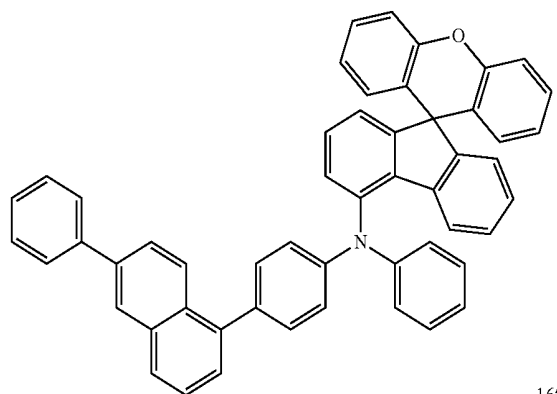

165

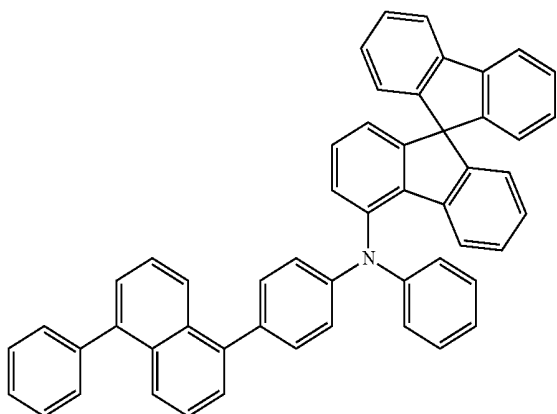


166

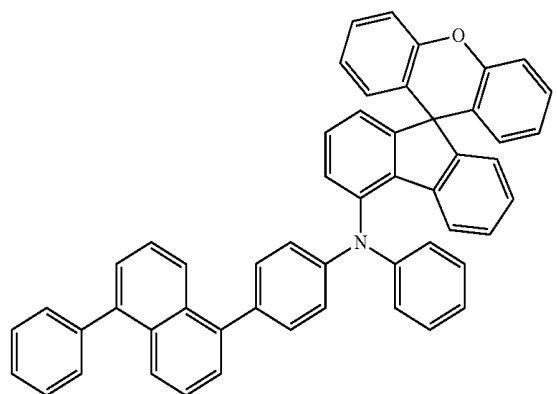


-continued


167

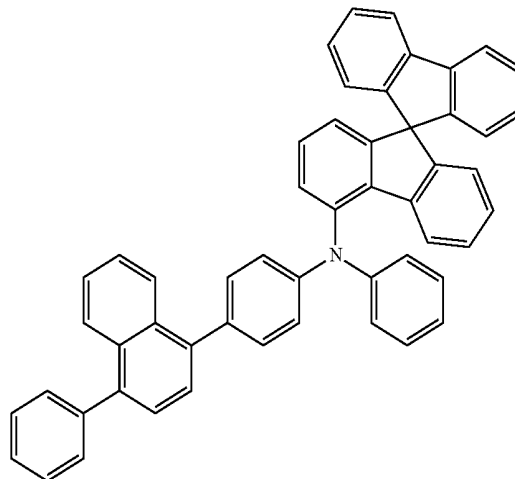


168

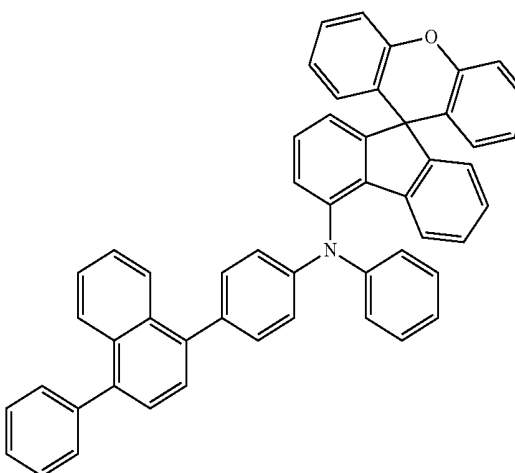


169

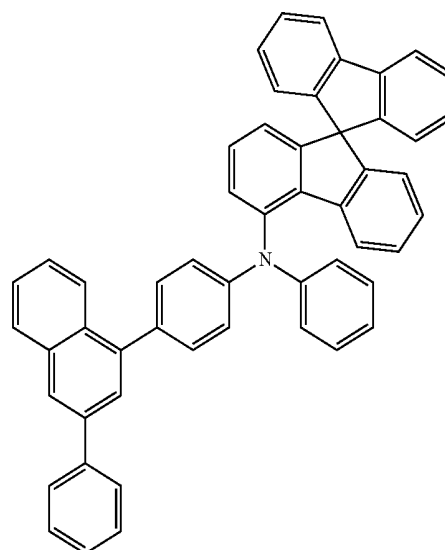


-continued

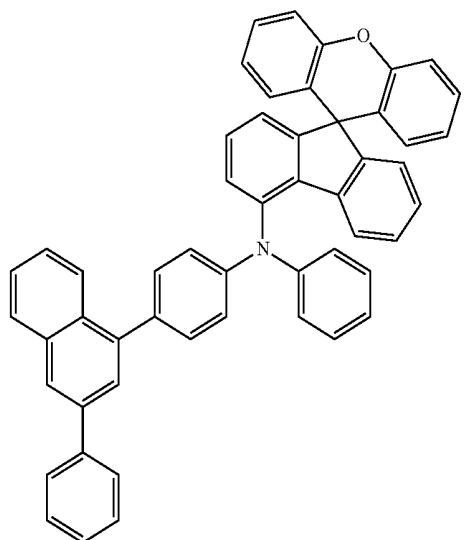


-continued

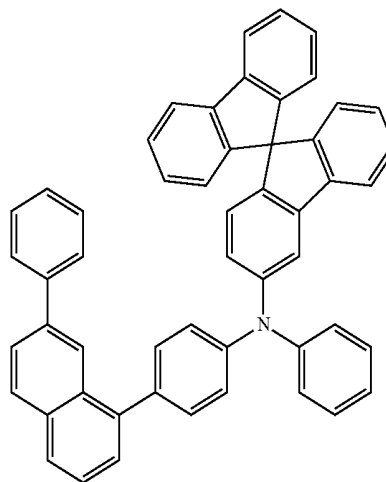


171

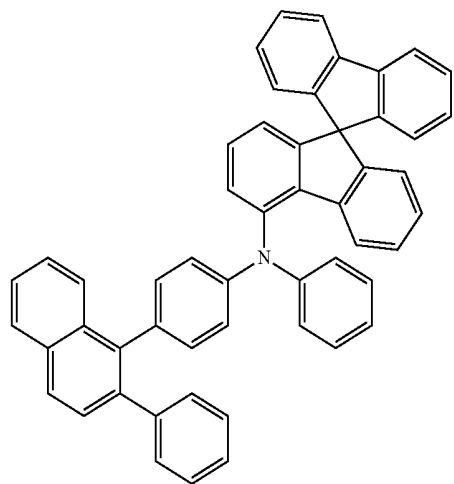


174

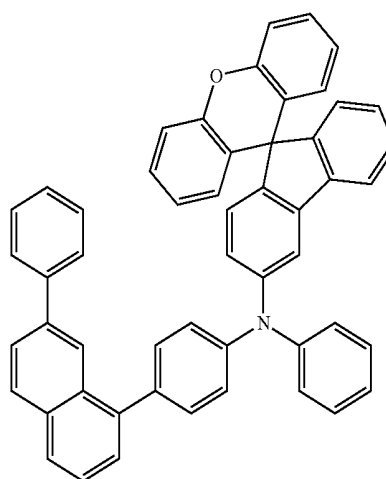


172

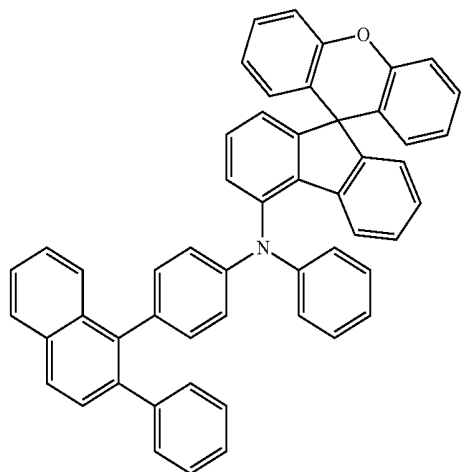

175

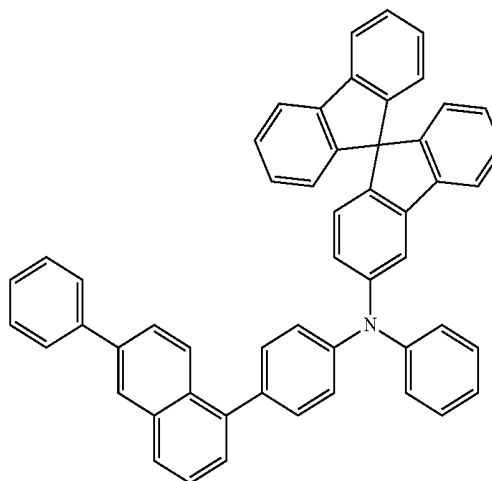


-continued

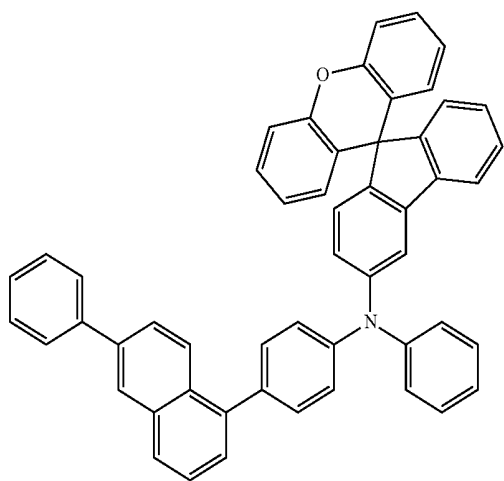



176

-continued

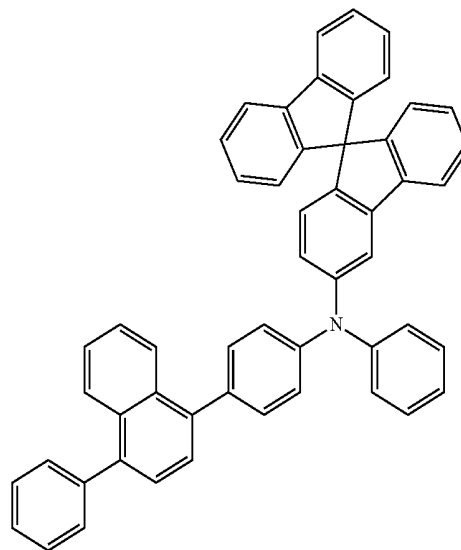



179

177

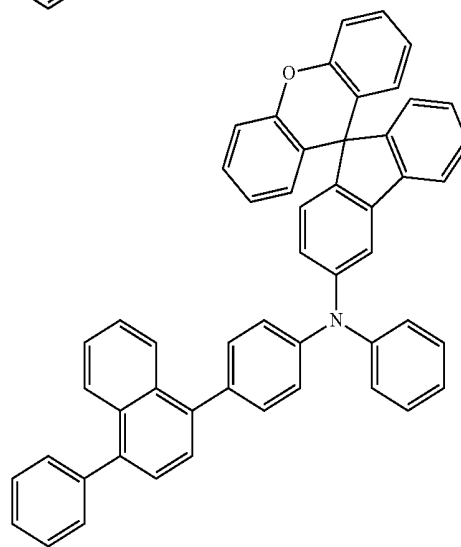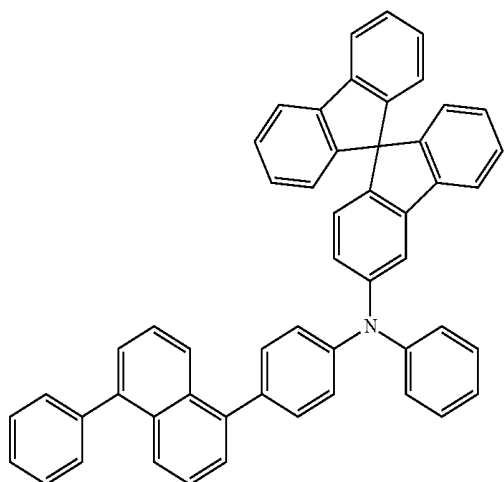




180

178



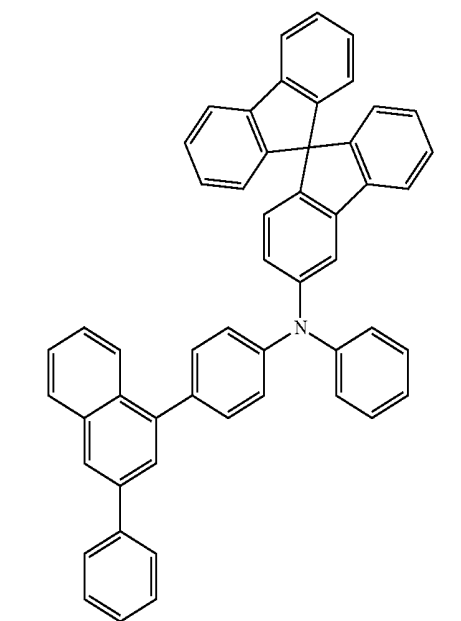
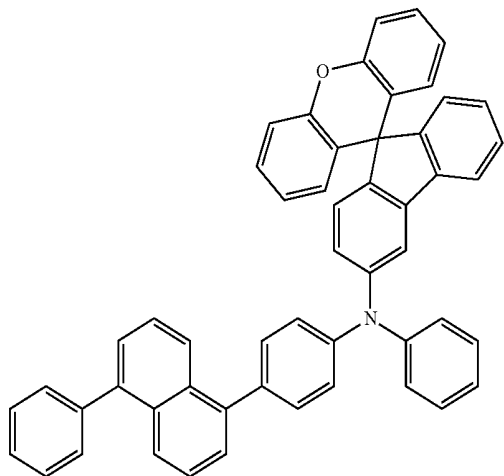


181

-continued

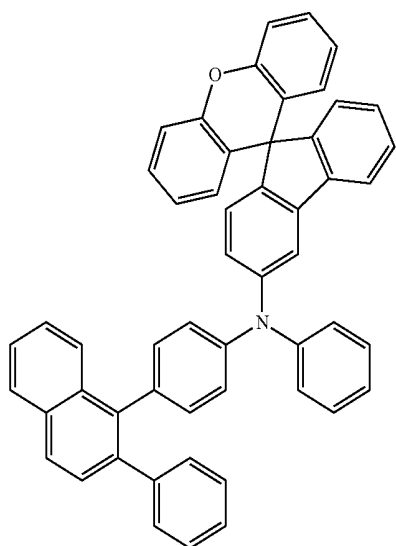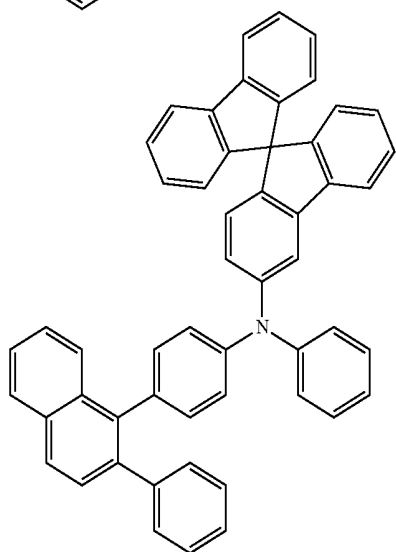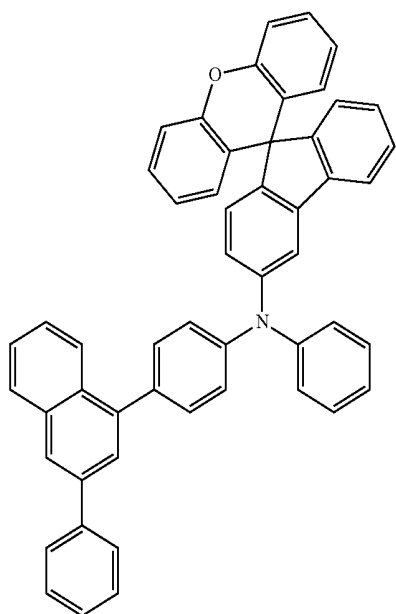


-continued

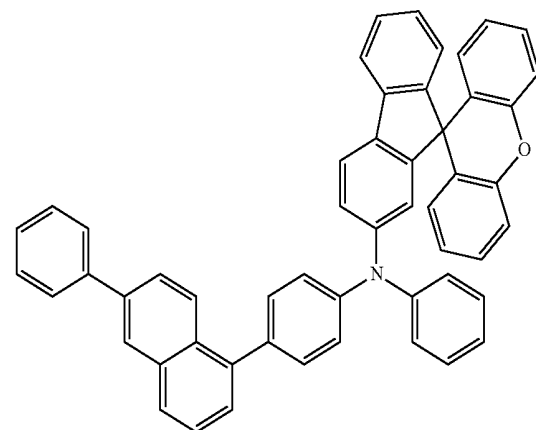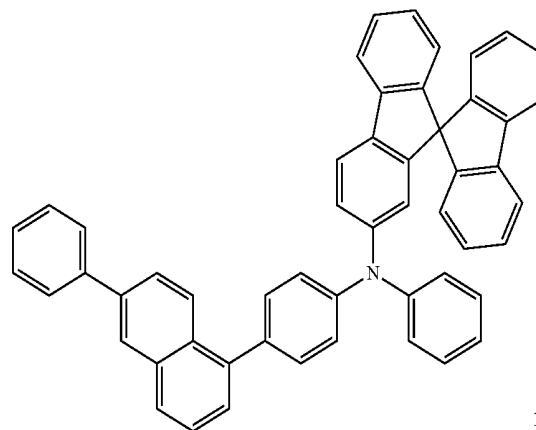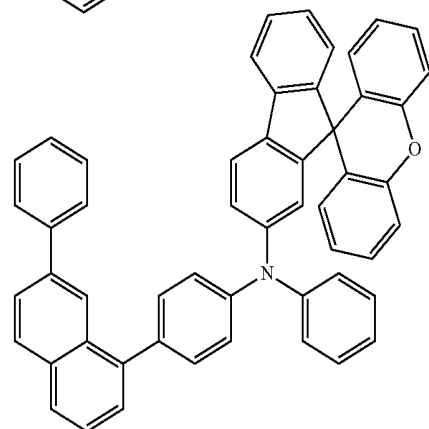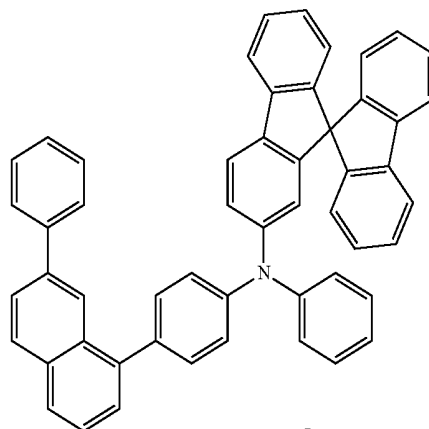


-continued

189

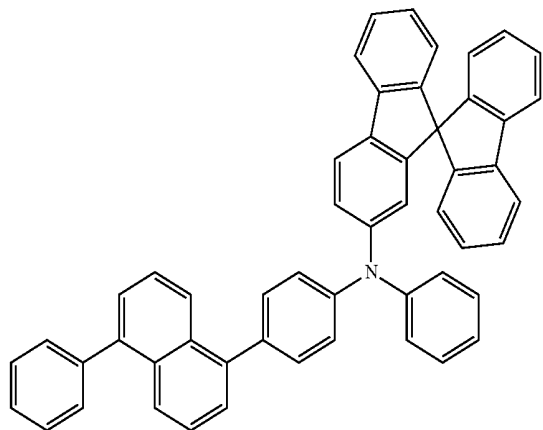


-continued


192

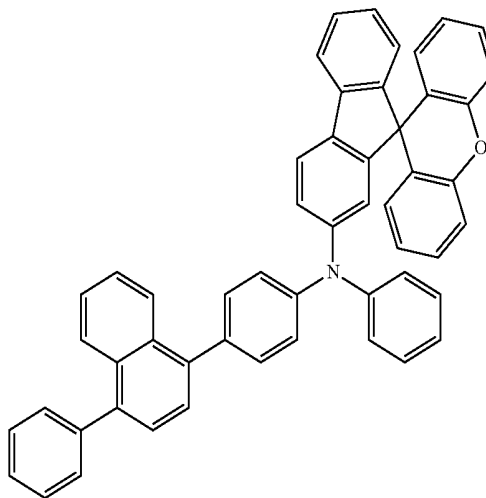


190

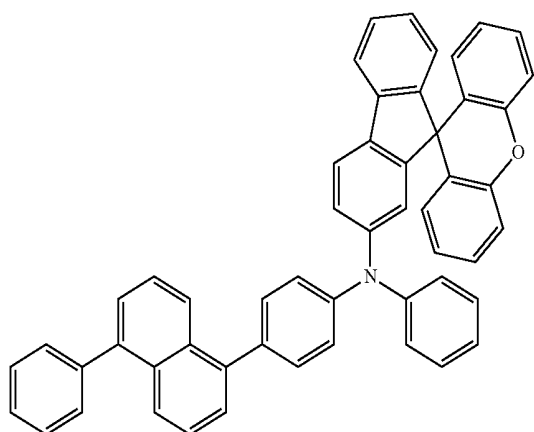


193

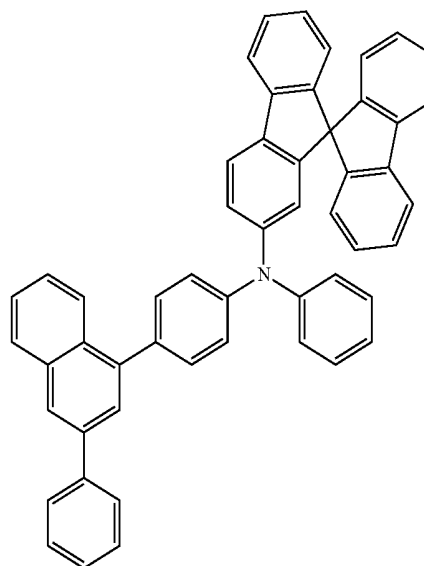


191

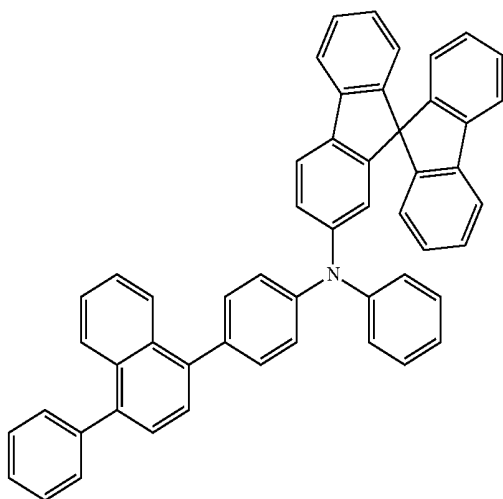


194

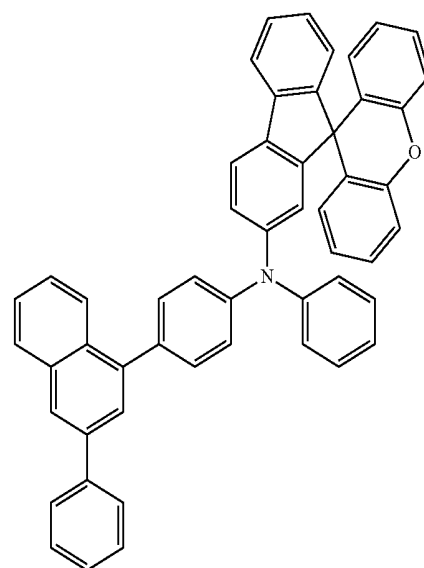


-continued

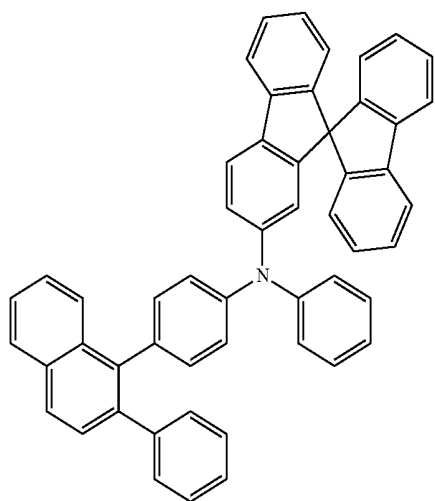


-continued

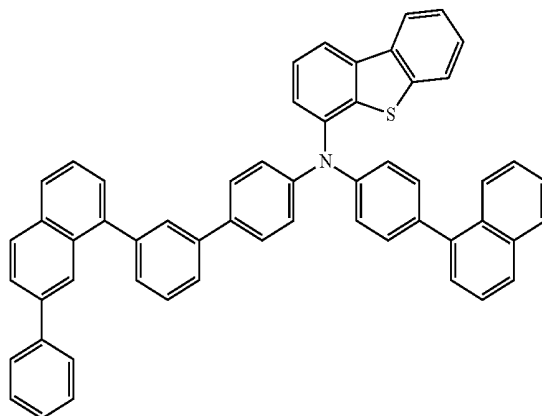


196

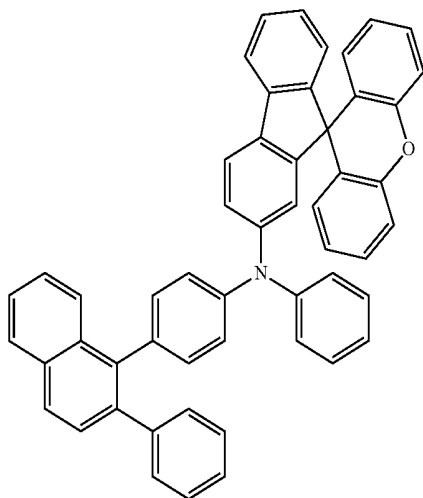


199

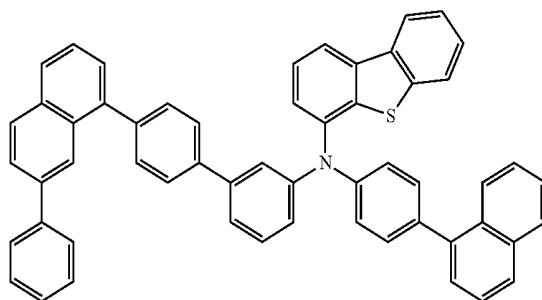


200

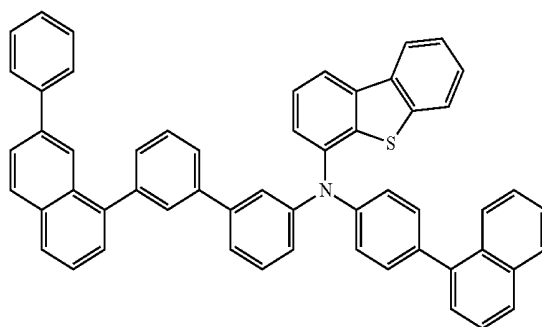

197

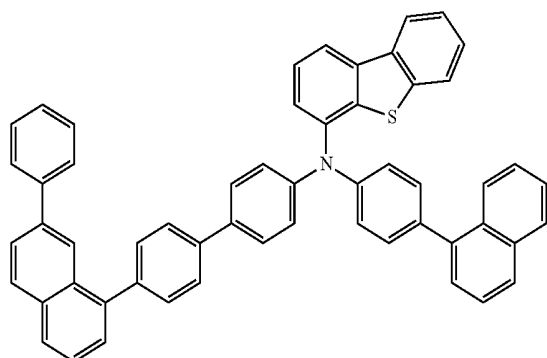


201

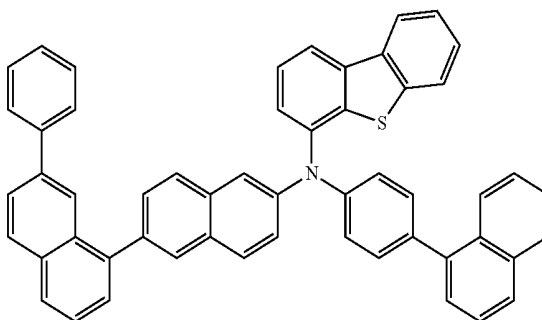


-continued

202

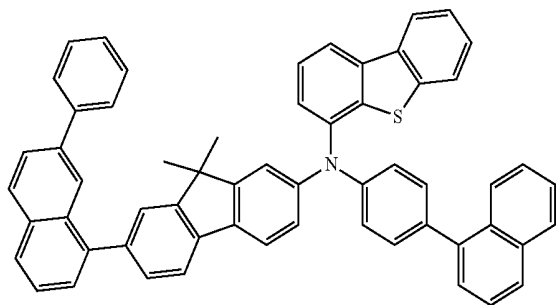


203

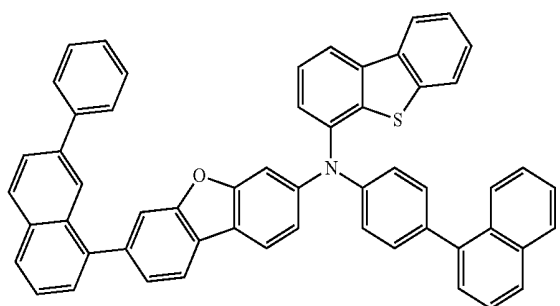


-continued


206

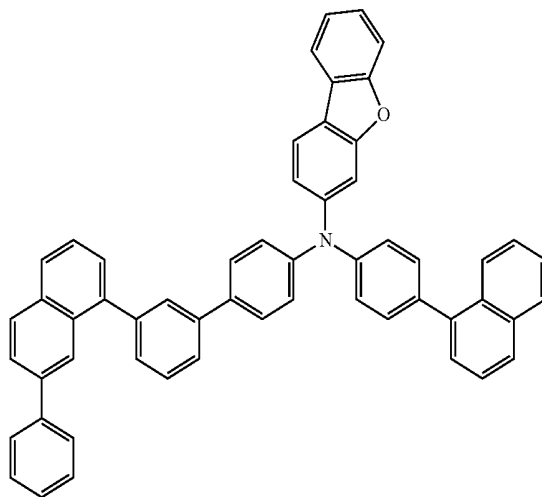


207

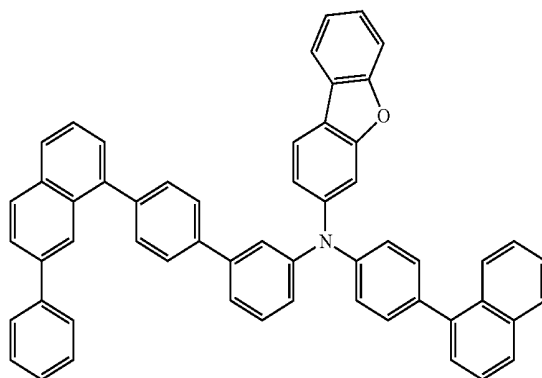


204

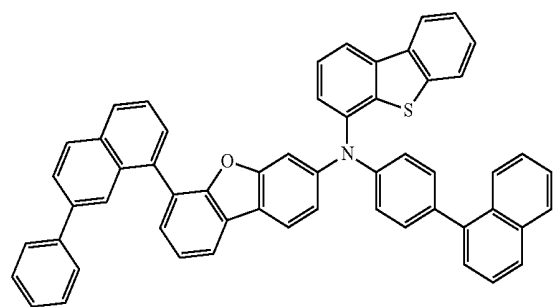

205

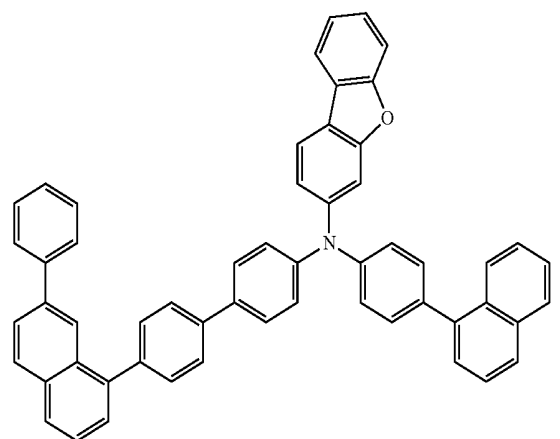


208

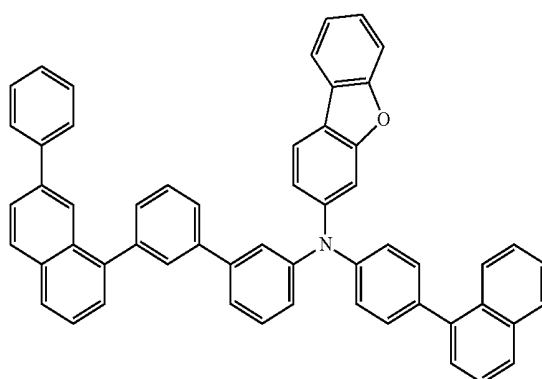


-continued


209

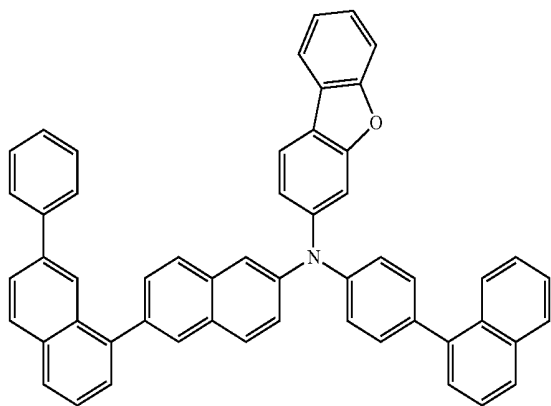


210

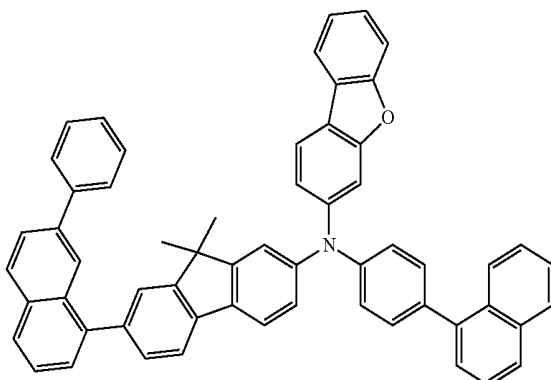

211

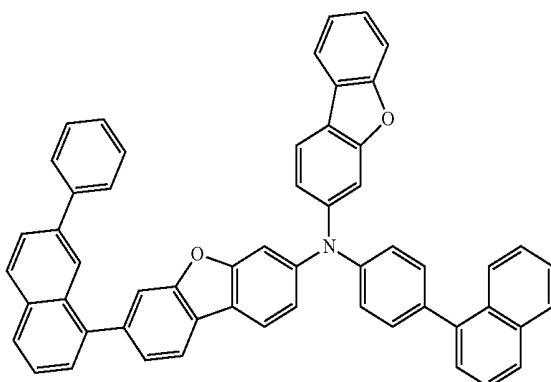

212

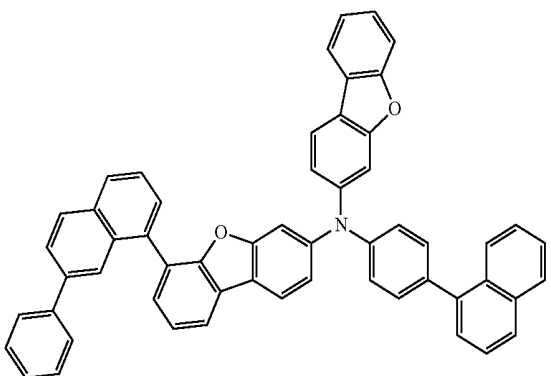

[0069] The monoamine compound according to an example embodiment includes a fused ring and a phenyl-naphthyl group with a high thermal resistance and electric charge resistance, and therefore, when used as a material for an organic electroluminescence device it may contribute to extending a device life. When used as a material for an organic electroluminescence device, the monoamine compound may also enhance the quality of layers due to the bulky phenyl-naphthyl group which decreases symmetry of molecule and inhibits crystallization, thereby contributing to securing high efficiency.

[0070] Hereinafter, an organic electroluminescence device according to an example embodiment will be explained, referring to FIGS. 1 to 3. The organic electroluminescence device according to an example embodiment includes the monoamine compound according to an example embodiment. For example, a hole transport region HTR includes the monoamine compound represented by Formula 1.

[0071] The following explanation will be mainly given with features different from the monoamine compound according to an example embodiment, and unexplained parts will follow the above description on the monoamine compound according to an example embodiment.

[0072] The first electrode EL1 has conductivity. The first electrode EL1 may be a pixel electrode or an anode. The first electrode EL1 may be a transmissive electrode, a transfective electrode, or a reflective electrode. In case the first electrode EL1 is the transmissive electrode, the first electrode EL1 may include a transparent metal oxide such as indium tin oxide (ITO), indium zinc oxide (IZO), zinc oxide (ZnO), or indium tin zinc oxide (ITZO). In case the first electrode EL1 is the transfective electrode or reflective electrode, the first electrode EL1 may include Ag, Mg, Cu, Al, Pt, Pd, Au, Ni, Nd, Ir, Cr, Li, Ca, LiF/Ca, LiF/Al, Mo, Ti, a compound thereof, or a mixture thereof (for example, a mixture of Ag and Mg). Also, the first electrode EL1 may have a structure including a plurality of layers including a reflective layer or transfective layer formed using the above materials, and a transparent conductive layer formed using ITO, IZO, ZnO, or ITZO. For example, the first electrode EL1 may have a triple-layer structure of ITO/Ag/ITO.

[0073] The thickness of the first electrode EL1 may be from about 1,000 Å to about 10,000 Å, for example, from about 1,000 Å to about 3,000 Å.

[0074] The hole transport region HTR is on the first electrode EL1. The hole transport region HTR may include at least one of a hole injection layer HIL, a hole transport layer HTL, a hole buffer layer, or an electron blocking layer EBL.

[0075] The hole transport region HTR includes the monoamine compound according to an example embodiment, as described above.

[0076] The hole transport region HTR may have a single layer formed using a single material, a single layer formed using a plurality of different materials, or a plurality of layers formed using a plurality of different materials.

[0077] For example, the hole transport region HTR may have a single layer structure of a hole injection layer HIL or a hole transport layer HTL, or may have a single layer structure formed using a hole injection material and a hole transport material. In addition, the hole transport region HTR may have a single layer structure formed using a plurality of different materials, or a laminated structure of hole injection layer HIL/hole transport layer HTL, hole

injection layer HIL/hole transport layer HTL/hole buffer layer, hole injection layer HIL/hole buffer layer, hole transport layer HTL/hole buffer layer, or hole injection layer HIL/hole transport layer HTL/electron blocking layer EBL, laminated in order from the first electrode EL1, without limitation.

[0078] As described above, the hole transport region HTR may have a multilayer structure having a plurality of layers, and a layer of the plurality of layers contacting with the emission layer EML may include the monoamine compound represented by Formula 1. For example, the hole transport region HTR may include a hole injection layer HIL on the first electrode EL1, a hole transport layer HTL on the hole injection layer HIL, and an electron blocking layer EBL on the hole transport layer HTL, and the electron blocking layer EBL may include the monoamine compound represented by Formula 1. In another example, the hole transport region HTR may include a hole injection layer HIL and a hole transport layer HTL, and the hole transport layer HTL may include the monoamine compound represented by Formula 1.

[0079] The hole transport region HTR may include one or more of the monoamine compound represented by Formula 1. For example, the hole transport region HTR may include at least one selected from the group of compounds represented in the above-described Compound Group 1.

[0080] The hole transport region HTR may be formed using various methods such as a vacuum deposition method, a spin coating method, a cast method, a Langmuir-Blodgett (LB) method, an inkjet printing method, a laser printing method, and a laser induced thermal imaging (LITI) method.

[0081] The hole injection layer HIL may include, for example, a phthalocyanine compound such as copper phthalocyanine; N,N'-diphenyl-N,N'-bis-[4-(phenyl-m-tolyl-amino)-phenyl]-biphenyl-4,4'-diamine (DNTPD), 4,4',4''-tris(3-methylphenylphenylamino)triphenylamine (m-MTDATA), 4,4',4''-tris(N,N-diphenylamino)triphenylamine (TDATA), 4,4',4''-tris{N-(2-naphthyl)-N-phenylamino}-triphenylamine (2-TNATA), poly(3,4-ethylenedioxythiophene)/poly(4-styrenesulfonate) (PEDOT/PSS), polyaniline/dodecylbenzenesulfonic acid (PANI/DBSA), polyaniline/camphor sulfonic acid (PANI/CSA), polyaniline/poly(4-styrenesulfonate) (PANI/PSS), N,N'-di(naphthalen-1-yl)-N,N'-diphenyl-benzidine (NPD), triphenylamine-containing polyether ketone (TPAPEK), 4-isopropyl-4'-methyl-diphenyliodonium tetrakis(pentafluorophenyl)borate, dipyrazino[2,3-f:2',3'-h] quinoxaline-2,3,6,7,10,11-hexacarbonitrile (HAT-CN), etc.

[0082] The hole transport layer HTL may include, for example, carbazole derivatives such as N-phenyl carbazole, polyvinyl carbazole, fluorine-based derivatives, N,N'-bis(3-methylphenyl)-N,N'-diphenyl-[1,1-biphenyl]-4,4'-diamine (TPD), triphenylamine-based derivatives such as 4,4',4''-tris(N-carbazolyl)triphenylamine (TCTA), N,N'-di(naphthalen-1-yl)-N,N'-diphenyl-benzidine (NPD), 4,4'-cyclohexylidene bis[N,N-bis(4-methylphenyl)benzenamine] (TAPC), 4,4'-bis[N,N'-(3-tolyl)amino]-3,3'-dimethylbiphenyl (HMTPD), etc.

[0083] The electron blocking layer EBL may include the monoamine compound represented by Formula 1, as described above. The electron blocking layer EBL may include a suitable material. The electron blocking layer EBL may include, for example, carbazole derivatives such as N-phenyl carbazole, polyvinyl carbazole, fluorine-based

derivatives, N,N'-bis(3-methylphenyl)-N,N'-diphenyl-[1,1-biphenyl]-4,4'-diamine (TPD), triphenylamine-based derivatives such as 4,4',4''-tris(N-carbazolyl)triphenylamine (TCTA), N,N'-di(naphthalen-1-yl)-N,N'-diphenyl-benzidine (NPD), 4,4'-cyclohexylidene bis[N,N-bis(4-methylphenyl)benzenamine] (TAPC), 4,4'-bis[N,N'-(3-tolyl)amino]-3,3'-dimethylbiphenyl (HMTPD) or mCP, etc.


[0084] The thickness of the hole transport region HTR may be from about 100 Å to about 10,000 Å, for example, from about 100 Å to about 5,000 Å. The thickness of the hole injection layer HIL may be, for example, from about 30 Å to about 1,000 Å, and the thickness of the hole transport layer HTL may be from about 30 Å to about 1,000 Å. For example, the thickness of the electron blocking layer EBL may be from about 10 Å to about 1,000 Å. In case the thicknesses of the hole transport region HTR, the hole injection layer HIL, the hole transport layer HTL and the electron blocking layer EBL satisfy the above-described ranges, satisfactory hole transport properties may be obtained without substantial increase of a driving voltage.

[0085] The hole transport region HTR may further include a charge generating material in addition to the above-described materials to improve conductivity. The charge generating material may be dispersed in the hole transport region HTR uniformly or non-uniformly. The charge generating material may be, for example, a p-dopant. The p-dopant may be one of quinone derivatives, metal oxides, or cyano group-containing compounds, without limitation. For example, non-limiting examples of the p-dopant may include quinone derivatives such as tetracyanoquinodimethane (TCNQ), and 2,3,5,6-tetrafluoro-tetracyanoquinodimethane (F4-TCNQ), metal oxides such as tungsten oxide and molybdenum oxide, etc.

[0086] As described above, the hole transport region HTR may further include at least one of a hole buffer layer or an electron blocking layer EBL. The hole buffer layer may compensate an optical resonance distance according to the wavelength of light emitted from the emission layer EML and increase light emission efficiency. Materials included in the hole transport region HTR may be used as materials included in the hole buffer layer. The electron blocking layer EBL is a layer preventing electron injection from the electron transport region ETR into the hole transport region HTR.

[0087] The emission layer EML is on the hole transport region HTR. The thickness of the emission layer EML may be, for example, from about 100 Å to about 1,000 Å, or from about 100 Å to about 600 Å. The emission layer EML may have a single layer formed using a single material, a single layer formed using a plurality of different materials, or a multilayer structure having a plurality of layers formed using a plurality of different materials.

[0088] A suitable emission material may be used as a material for the emission layer EML. The material for the emission layer EML may be selected from, for example, fluoranthene derivatives, pyrene derivatives, arylacetylene derivatives, anthracene derivatives, fluorene derivatives, perylene derivatives, chrysene derivatives, or the like, and preferably, from pyrene derivatives, perylene derivatives, or anthracene derivatives. For example, as the host material of the emission layer EML, anthracene derivatives represented by the following Formula 3 may be used.

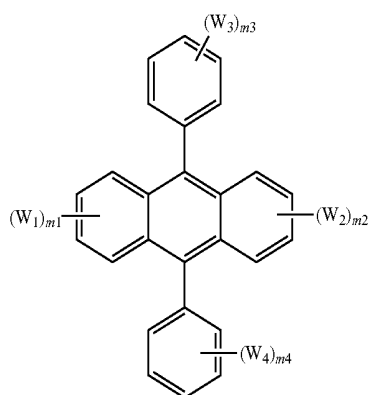


[0089] In Formula 3, W_1 to W_4 are each independently a hydrogen atom, a deuterium atom, a halogen atom, a substituted or unsubstituted silyl group, a substituted or unsubstituted alkyl group having 1 to 20 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 ring carbon atoms, or a substituted or unsubstituted heteroaryl group having 2 to 30 ring carbon atoms, or may form a ring by combining adjacent groups with each other, m_1 and m_2 are each independently an integer of 0 to 4, and m_3 and m_4 are each independently an integer of 0 to 5.






[0090] When m_1 is 1, W_1 may not be a hydrogen atom. When m_2 is 1, W_2 may not be a hydrogen atom. When m_3 is 1, W_3 may not be a hydrogen atom. When m_4 is 1, W_4 may not be a hydrogen atom.

[0091] When m_1 is an integer of 2 or more, a plurality of W_1 may be the same or different from each other. When m_2 is an integer of 2 or more, a plurality of W_2 may be the same or different from each other. When m_3 is an integer of 2 or more, a plurality of W_3 may be the same or different from each other. When m_4 is an integer of 2 or more, a plurality of W_4 may be the same or different from each other.


[0092] The compound represented by Formula 3 may include the compounds represented by the following structures, for example.

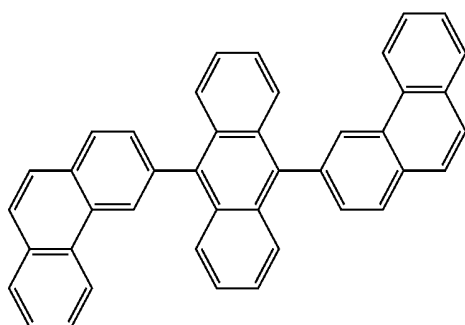

-continued

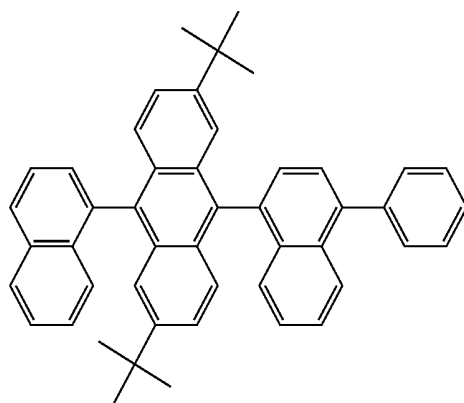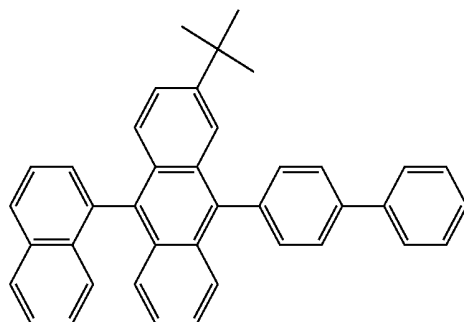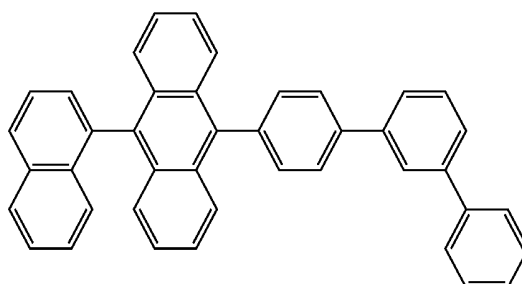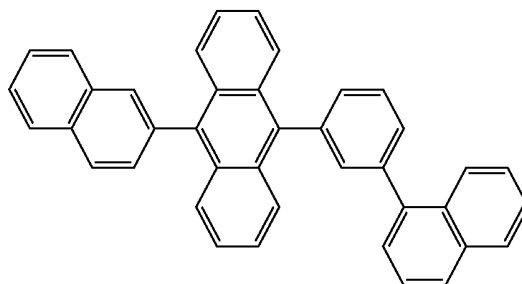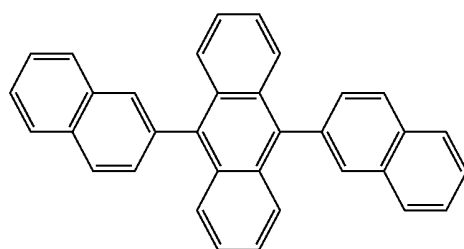


-continued

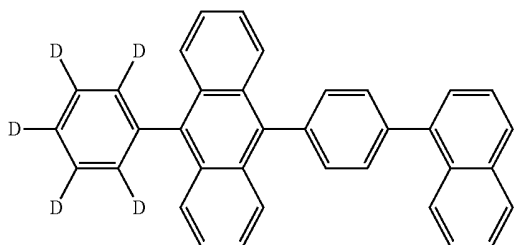


a-7


-continued

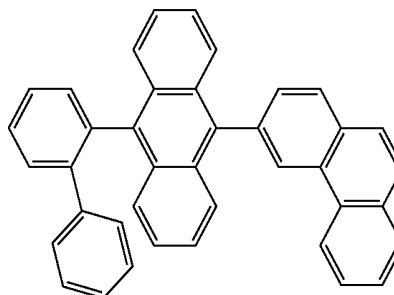


a-12

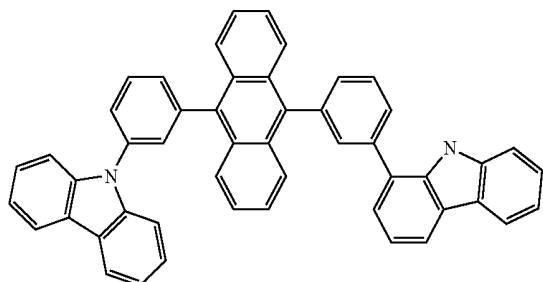


a-8

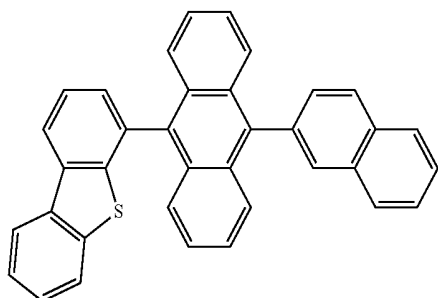

a-9

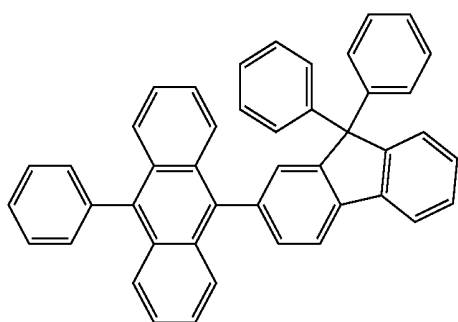

a-10

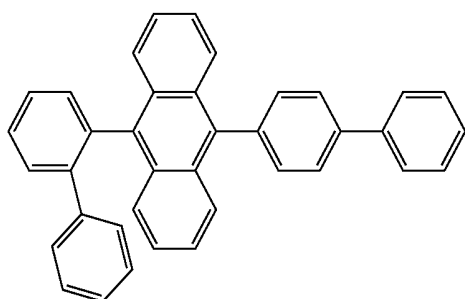

a-11

[0093] The emission layer EML may include a fluorescent material including any one selected from the group of spiro-DPVBi, 2,2',7,7'-tetrakis(biphenyl-4-yl)-9,9'-spirobifluorene(spiro-sexiphenyl) (spiro-6P), distyryl-benzene (DSB), distyryl-arylene (DSA), polyfluorene (PFO)-based polymer and poly(p-phenylene vinylene) (PPV)-based polymer, for example.

[0094] The emission layer EML may further include a dopant, and the dopant may be a suitable material. For example, styryl derivatives (for example, 1,4-bis[2-(3-N-ethylcarbazolyl)vinyl]benzene (BCzVB), 4-(di-p-tolylamino)-4'-[(di-p-tolylamino)styryl]stilbene (DPAVB), N-(4-((E)-2-(6-((E)-4-(diphenylamino)styryl)naphthalen-2-yl)vinyl)phenyl)-N-phenylbenzenamine (N-BDAVB)), perylene and the derivatives thereof (for example, 2,5,8,11-tetra-t-butylperylene (TBPe)), pyrene and the derivatives thereof (for example, 1,1-dipyrene, 1,4-dipyrenylbenzene, 1,4-bis(N,N-diphenylamino)pyrene, 1,6-bis(N,N-diphenylamino)pyrene), 2,5,8,11-tetra-t-butylperylene (TBP), 1,3,5-tris(N-phenylbenzimidazole-2-yl)benzene (TPBi), etc., may be used as a dopant.

[0095] The emission layer EML may include, for example, tris(8-hydroxyquinolino)aluminum (Alq₃), 4,4'-bis(N-carbazolyl)-1,1'-biphenyl (CBP), poly(N-vinylcarbazole) (PVK), 9,10-di(naphthalen-2-yl)anthracene (ADN), 4,4',4''-tris(carbazol-9-yl)-triphenylamine (TCTA), 1,3,5-tris(N-phenylbenzimidazol-2-yl)benzene (TPBi), 3-tert-butyl-9,10-di(naphth-2-yl)anthracene (TBADN), distyrylarylene (DSA), 4,4'-bis(9-carbazolyl)-2,2'-dimethyl-biphenyl (CDBP), 2-methyl-9,10-bis(naphthalen-2-yl)anthracene (MADN), bis[2-(diphenylphosphino)phenyl]ether oxide (DPEPO), hexaphenyl cyclotriphosphazene (CPI), 1,4-bis(triphenylsilyl)benzene (UGH2), hexaphenylcyclotrisiloxane (DPSiO₃), octaphenylcyclotetrasiloxane (DPSiO₄), 2,8-bis(diphenylphosphoryl)dibenzofuran (PPF), etc.

[0096] The electron transport region ETR is provided on the emission layer EML. The electron transport region ETR may include at least one of a hole blocking layer HBL, an electron transport layer ETL or an electron injection layer EIL, for example.

[0097] The electron transport region ETR may have a single layer formed using a single material, a single layer formed using a plurality of different materials, or a multi-layer structure having a plurality of layers formed using a plurality of different materials.

[0098] For example, the electron transport region ETR may have a single layer structure of an electron injection layer EIL or an electron transport layer ETL, or a single layer structure formed using an electron injection material and an electron transport material. In addition, the electron

transport region ETR may have a single layer structure having a plurality of different materials, or a laminated structure of electron transport layer ETL/electron injection layer EIL, or hole blocking layer HBL/electron transport layer ETL/electron injection layer EIL, laminated in order from the emission layer EML, without limitation. The thickness of the electron transport region ETR may be, for example, from about 100 Å to about 1,500 Å.

[0099] The electron transport region ETR may be formed using various methods such as a vacuum deposition method, a spin coating method, a cast method, a Langmuir-Blodgett (LB) method, an inkjet printing method, a laser printing method, and a laser induced thermal imaging (LITI) method.

[0100] In case the electron transport region ETR includes the electron transport layer ETL, the electron transport region ETR may include tris(8-hydroxyquinolino)aluminum (Alq₃), 1,3,5-tri[(3-pyridyl)-phen-3-yl]benzene, 2,4,6-tris(3'-(pyridin-3-yl)biphenyl-3-yl)-1,3,5-triazine, bis[2-(diphenylphosphino)phenyl] ether oxide (DPEPO), 2-(4-(N-phenylbenzimidazolyl-1-ylphenyl)-9,10-dinaphthylanthracene, 1,3,5-tri(1-phenyl-1H-benzo[d]imidazol-2-yl)phenyl (TPBi), 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline (BCP), 4,7-diphenyl-1,10-phenanthroline (Bphen), 3-(4-biphenyl)-4-phenyl-5-tert-butylphenyl-1,2,4-triazole (TAZ), 4-(naphthalen-1-yl)-3,5-diphenyl-4H-1,2,4-triazole (NTAZ), 2-(4-biphenyl)-5-(4-tert-butylphenyl)-1,3,4-oxadiazole (tBu-PBD), bis(2-methyl-8-quinolinolato-N1,O8)-(1,1'-Biphenyl-4-olato)aluminum (BALq), berylliumbis (benzoquinolin-10-olate) (Bebq₂), 9,10-di(naphthalen-2-yl)anthracene (ADN), or a mixture thereof, for example. The thickness of the electron transport layer ETL may be from about 100 Å to about 1,000 Å, for example, from about 150 Å to about 500 Å. If the thickness of the electron transport layer ETL satisfies the above-described range, satisfactory electron transport properties may be obtained without substantial increase of a driving voltage.

[0101] When the electron transport region ETR includes the electron injection layer EIL, the electron transport region ETR may use LiF, lithium quinolate (LIQ), Li₂O, BaO, NaCl, CsF, a metal in lanthanides such as Yb, or a metal halide such as RbCl and RbI, for example. The electron injection layer EIL also may be formed using a mixture material of an electron transport material and an insulating organo metal salt. The organo metal salt may be a material having an energy band gap of about 4 eV or more. The organo metal salt may include, for example, a metal acetate, a metal benzoate, a metal acetoacetate, a metal acetylacetonate, or a metal stearate. The thickness of the electron injection layer EIL may be from about 1 Å to about 100 Å, for example, from about 3 Å to about 90 Å. In case the thickness of the electron injection layer EIL satisfies the above described range, satisfactory electron injection properties may be obtained without inducing the substantial increase of a driving voltage.

[0102] The electron transport region ETR may include a hole blocking layer HBL, as described above. The hole blocking layer HBL may include, for example, 2,9-dimethyl-4,7-diphenyl-1,10-phenanthroline (BCP), 4,7-diphenyl-1,10-phenanthroline (Bphen), or bis[2-(diphenylphosphino)phenyl]ether oxide (DPEPO), etc.

[0103] The second electrode EL2 is on the electron transport region ETR. The second electrode EL2 may be a common electrode or a cathode. The second electrode EL2

may be a transmissive electrode, a transreflective electrode or a reflective electrode. In case the second electrode EL2 is the transmissive electrode, the second electrode EL2 may be formed using transparent metal oxides, for example, ITO, IZO, ZnO, ITZO, etc.

[0104] In case the second electrode EL2 is the transreflective electrode or the reflective electrode, the second electrode EL2 may include Ag, Mg, Cu, Al, Pt, Pd, Au, Ni, Nd, Ir, Cr, Li, Ca, LiF/Ca, LiF/Al, Mo, Ti, a compound thereof, or a mixture thereof (for example, a mixture of Ag and Mg). The second electrode EL2 may have a multilayer structure including a reflective layer or a transreflective layer formed using the above-described materials and a transparent conductive layer formed using ITO, IZO, ZnO, ITZO, etc.

[0105] The second electrode EL2 may be connected with an auxiliary electrode. In case the second electrode EL2 is connected with the auxiliary electrode, the resistance of the second electrode EL2 may decrease.

[0106] In the organic electroluminescence device 10, according to the application of a voltage to each of the first electrode EL1 and the second electrode EL2, holes injected from the first electrode EL1 may move via the hole transport region HTR to the emission layer EML, and electrons injected from the second electrode EL2 may move via the electron transport region ETR to the emission layer EML. The electrons and the holes are recombined in the emission layer EML to generate excitons, and light may be emitted via the transition of the excitons from an excited state to a ground state.

[0107] In case the organic electroluminescence device 10 is a top emission type, the first electrode EL1 may be a reflective electrode, and the second electrode EL2 may be a transmissive electrode or a transreflective electrode. In case the organic electroluminescence device 10 is a bottom emission type, the first electrode EL1 may be a transmissive electrode or a transreflective electrode, and the second electrode EL2 may be a reflective electrode.

[0108] The organic electroluminescence device 10 according to an example embodiment includes the monoamine compound represented by Formula 1, thereby securing high efficiency and a long device life, as well as a decreased driving voltage.


[0109] The following Examples and Comparative Examples are provided in order to highlight characteristics of one or more embodiments, but it will be understood that the Examples and Comparative Examples are not to be construed as limiting the scope of the embodiments, nor are the Comparative Examples to be construed as being outside the scope of the embodiments. Further, it will be understood that the embodiments are not limited to the particular details described in the Examples and Comparative Examples.

Synthesis Examples

[0110] The monoamine compound according to an example embodiment may be synthesized, for example, as follows.


[0111] 1. Synthesis of Compound 1

[0112] Compound 1, a monoamine compound according to an example embodiment, may be synthesized, for example, as follows.

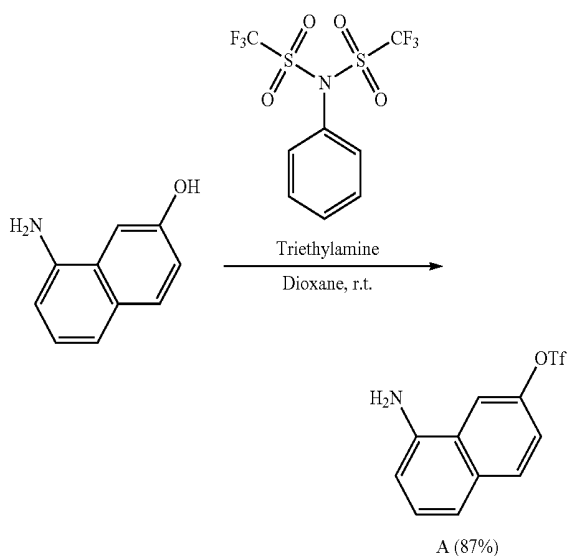[0113] (Synthesis of Intermediate A)

[0114] Under an argon (Ar) atmosphere, N-phenyltrifluoromethanesulfonamide (25.1 g) dissolved in dioxane (80 mL) was added dropwisely to a solution of 8-amino-2-naphthol (10.0 g) and triethylamine (12 mL) dissolved in dioxane (200 mL) in an 1 L three-neck flask, at about 0° C. for about 30 minutes, and the mixture was heated and stirred at room temperature for about 4 hours. Hexane was added to the reaction solution, and the precipitated solid was filtered by using a suction system to obtain 15.9 g (yield 87%) of Intermediate A as a brown solid.


[0115] The molecular weight of Intermediate A measured by FAB-MS was 291.

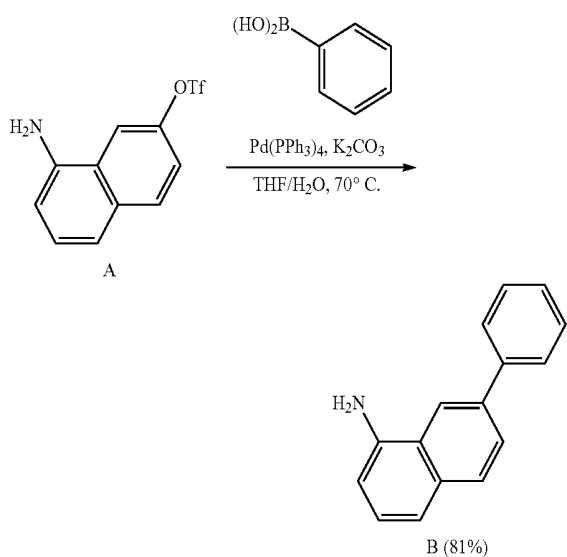[0116] (Synthesis of Intermediate B)

[0117] Under an argon (Ar) atmosphere, Intermediate A (3.00 g), Pd(PPh₃)₄ (0.361 g), K₂CO₃ (2.85 g), and phenylboronic acid (1.67 g) were dissolved in a mixture solution of THF/water (8:2) (110 mL) in a 300 mL three neck flask, and


the resultant was heated and stirred at about 70° C. for about 5 hours. After cooling in air, dichloromethane was added, an organic layer was separated and taken, and solvents were evaporated. The crude product thus obtained was purified by silica gel column chromatography (hexane/toluene) to obtain 1.83 g (yield 81%) of Intermediate B as a pale yellow solid.



[0118] The molecular weight of Intermediate B measured by FAB-MS was 219.

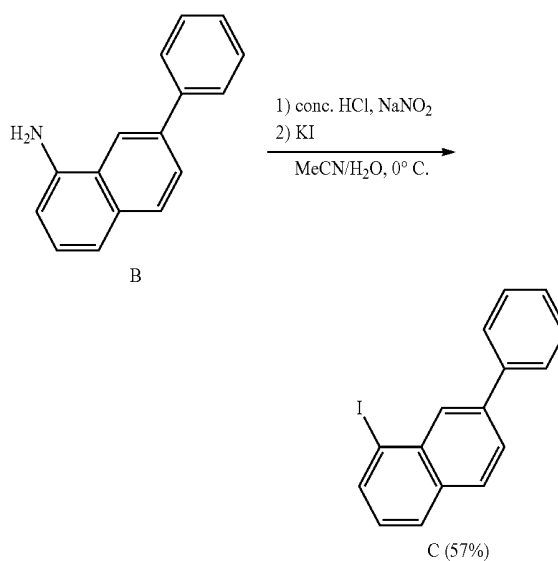[0119] (Synthesis of Intermediate C)

[0120] Under an atmospheric condition, Intermediate B (1.50 g), conc. HCl (5.20 mL), and NaNO₂ (0.78 g) were dissolved in a mixture solution of MeCN/water (1:1) (13 mL) in an 100 mL three neck flask, and the resultant was stirred at about 0° C. for about 15 minutes. After that, KI (9.38 g) dissolved in water (26 mL) was added slowly, followed by stirring at about 0° C. for about 2 hours. After that, dichloromethane was added, an organic layer was separated and taken, and solvents were evaporated. The crude product thus obtained was purified by silica gel column chromatography (hexane) to obtain 1.73 g (yield 57%) of Intermediate C as brown oil.

[0121] The molecular weight of Intermediate C measured by GC-MS was 330.


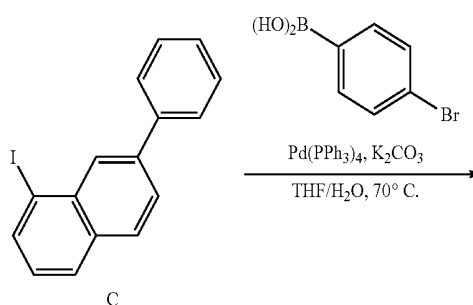
[0122] (Synthesis of Intermediate D)

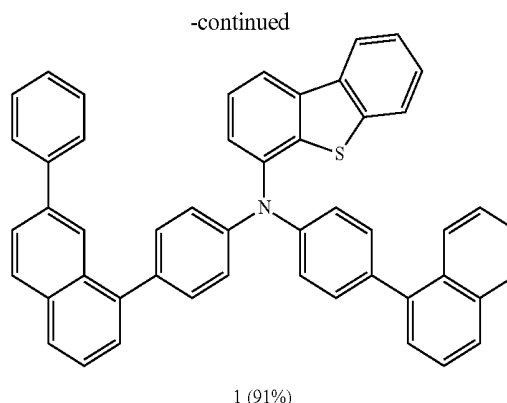

[0123] Under an argon (Ar) atmosphere, Intermediate C (2.86 g), Pd(PPh₃)₄ (0.30 g), K₂CO₃ (2.39 g), and 4-bromophenylboronic acid (1.74 g) were dissolved in a mixture solution of THF/water (8:2) (90 mL) in a 300 mL three neck flask, and the resultant was heated and stirred at about 70° C. for about 5 hours. After cooling in air, dichloromethane was added, an organic layer was separated and taken, and solvents were evaporated. The crude product thus obtained was purified by silica gel column chromatography (hexane/toluene) to obtain 2.46 g (yield 79%) of Intermediate D as a white solid.

[0124] The molecular weight of Intermediate D measured by GC-MS was 358.

[0125] (Synthesis of Compound 1)

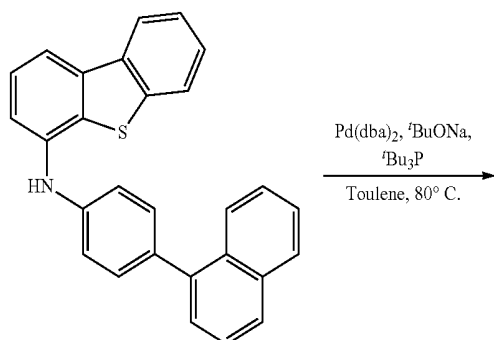

[0126] Under an argon (Ar) atmosphere, N-[4-(1-naphthyl)phenyl]-4-dibenzothiophenamine (2.80 g), Intermediate D (2.51 g), Pd(dba)₂ (0.14 g), tBu₃P (0.11 g) and tBuONa (1.34 g) were dissolved in dehydrated toluene (93 mL) in a 200 mL three neck flask, and the resultant was heated and stirred at about 80° C. for about 5 hours. After cooling in air, dichloromethane was added, an organic layer was separated and taken, and solvents were evaporated. The crude product thus obtained was purified by silica gel column chromatography (hexane) to obtain 4.31 g (yield 91%) of Compound 1 as a white solid.


[0127] The molecular weight of Compound 1 measured by FAB-MS was 679.

[0128] [¹H NMR (CDCl₃, 25° C., 300 Hz) δ=8.92-8.36 (m, 12H), 8.33 (d, J=8.5 Hz, 2H), 7.96 (d, J=8.5 Hz, 2H), 7.86-7.70 (m, 6H), 7.55 (d, J=8.5 Hz, 4H), 7.51-7.32 (m, 4H), 7.27-7.14 (m, 3H)]

[0129] 2. Synthesis of Compound 17

[0130] Compound 17, a monoamine compound according to an example embodiment, may be synthesized, for example, as follows.

[0131] (Synthesis of Intermediate E)

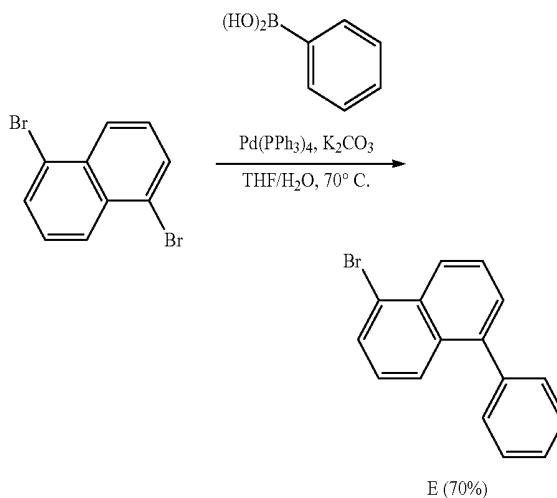


[0132] Under an argon (Ar) atmosphere, 1,5-dibromonaphthalene (18.7 g), phenylboronic acid (2.86 g), Pd(PPh₃)₄ (0.813 g), and K₂CO₃ (5.15 g) were dissolved in a mixture solution of THF/water (8:2) (360 mL) in a 1 L three neck flask, and the resultant was heated and stirred at

about 70° C. for about 5 hours. After cooling in air, dichloromethane was added, an organic layer was separated and taken, and solvents were evaporated. The crude product thus obtained was purified by silica gel column chromatography (hexane) to obtain 4.65 g (yield 70%) of Intermediate E as a pale yellow solid.

[0133] The molecular weight of Intermediate E measured by GC-MS was 282.


[0134] (Synthesis of Intermediate F)

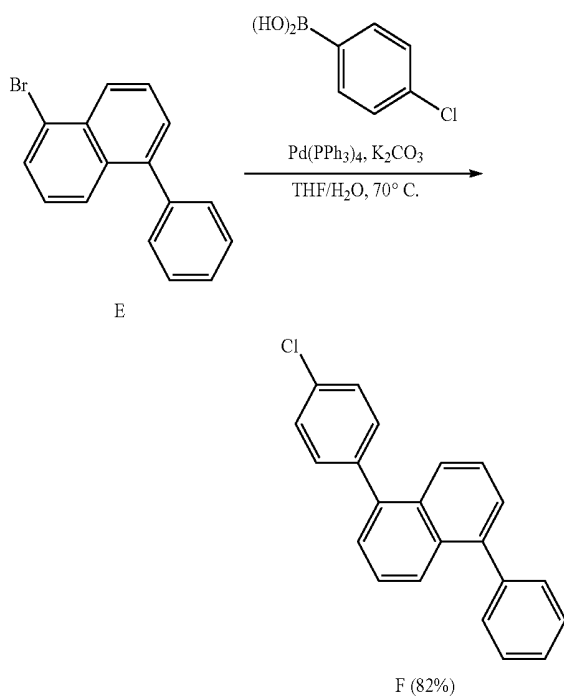


[0135] Under an argon (Ar) atmosphere, Intermediate E (2.02 g), 4-chlorophenylboronic acid (1.12 g), Pd(PPh₃)₄ (0.213 g), and K₂CO₃ (1.98 g) were dissolved in a mixture solution of THF/water (8:2) (110 mL) in an 1 L three neck flask, and the resultant was heated and stirred at about 70° C. for about 7 hours. After cooling in air, dichloromethane was added, an organic layer was separated and taken, and solvents were evaporated. The crude product thus obtained was purified by silica gel column chromatography (hexane/AcOEt) to obtain 2.25 g (yield 82%) of Intermediate F as a pale yellow solid.

[0136] The molecular weight of Intermediate F measured by GC-MS was 314.

[0137] (Synthesis of Compound 17)

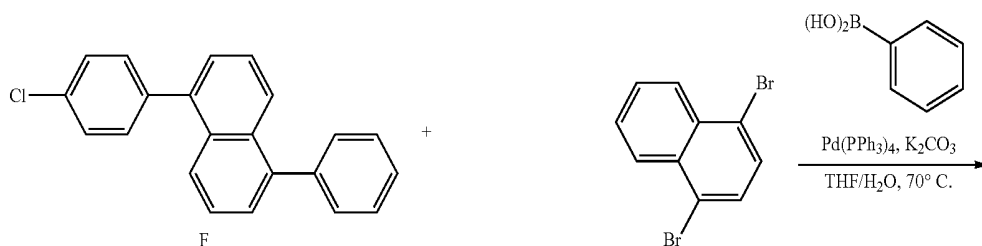

-continued

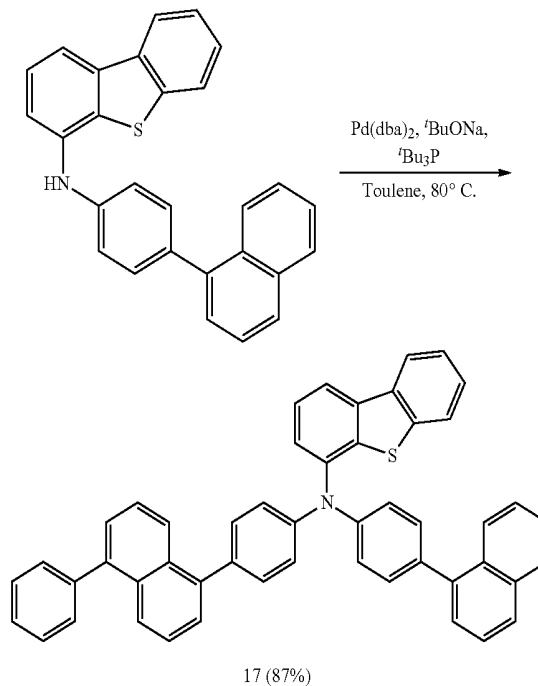

[0138] Under an argon (Ar) atmosphere, N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine (3.19 g), Intermediate F (2.50 g), Pd(dba)₂ (0.14 g), tBu₃P (0.14 g) and tBuONa (1.54 g) were dissolved in dehydrated toluene (53 mL) in a 200 mL three neck flask, and the resultant was heated and stirred at about 80° C. for about 8 hours. After cooling in air, dichloromethane was added, an organic layer was separated and taken, and solvents were evaporated. The crude product thus obtained was purified by silica gel column chromatography (hexane/AcOEt) to obtain 4.70 g (yield 87%) of Compound 17 as a white solid.


[0139] The molecular weight of Compound 17 measured by FAB-MS was 679.

[0140] [¹H NMR (CDCl₃, 25° C., 300 Hz) δ=9.00 (d, J=7.5 Hz, 2H), 8.82-8.41 (m, 12H), 7.96 (d, J=8.2 Hz, 2H), 7.86-7.71 (m, 6H), 7.55 (d, J=8.8 Hz, 4H), 7.51-7.30 (m, 3H), 7.26-7.14 (m, 4H)]


[0141] 3. Synthesis of Compound 71

[0142] Compound 71, a monoamine compound according to an example embodiment, may be synthesized, for example, as follows.

[0143] (Synthesis of Intermediate G)

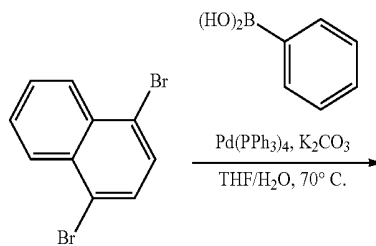


-continued



[0144] Intermediate G was synthesized by conducting the same synthetic method of Intermediate E except for using 1,4-dibromonaphthalene instead of 1,5-dibromonaphthalene in the synthetic method of Intermediate E.

[0145] The molecular weight of Intermediate G measured by FAB-MS was 283.


[0146] (Synthesis of Intermediate H)

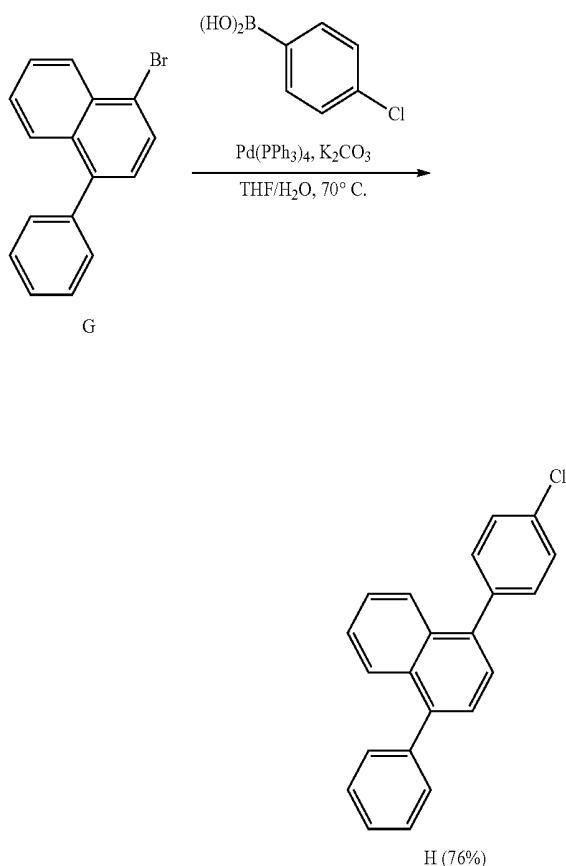

[0147] Intermediate H was synthesized by conducting the same synthetic method of Intermediate F except for using Intermediate G instead of Intermediate E in the synthetic method of Intermediate F.

[0148] The molecular weight of Intermediate H measured by GC-MS was 314.

[0149] (Synthesis of Compound 71)

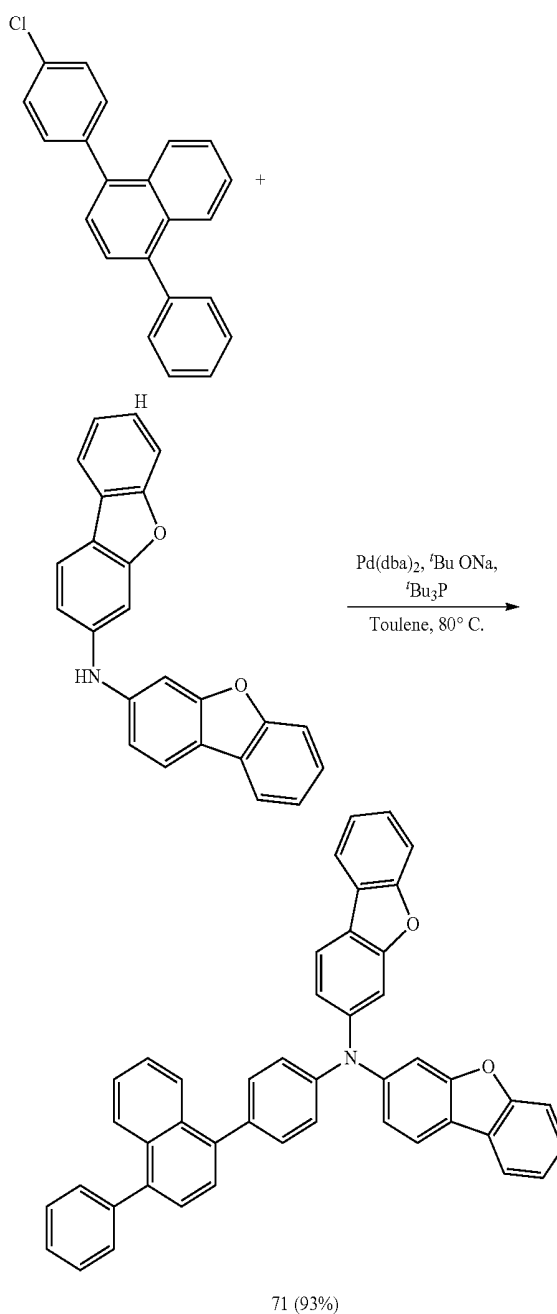


[0150] Compound 71 was synthesized by conducting the same synthetic method of Compound 17 except for using Intermediate H instead of Intermediate F and using N-3-dibenzofuranyl-3-dibenzofuranamine instead of N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine in the synthetic method of Compound 17.

[0151] The molecular weight of Compound 71 measured by FAB-MS was 627.

[0152] [¹H NMR (CDCl₃, 25° C., 300 Hz) δ=8.22 (d, J=8.5 Hz, 2H), 8.01-7.88 (m, 12H), 7.86 (d, J=8.2 Hz, 2H), 7.77-7.73 (m, 6H), 7.51-7.30 (m, 3H), 7.16-7.07 (m, 4H)]

[0153] 4. Synthesis of Compound 94

[0154] Compound 94, a monoamine compound according to an example embodiment, may be synthesized, for example, as follows.

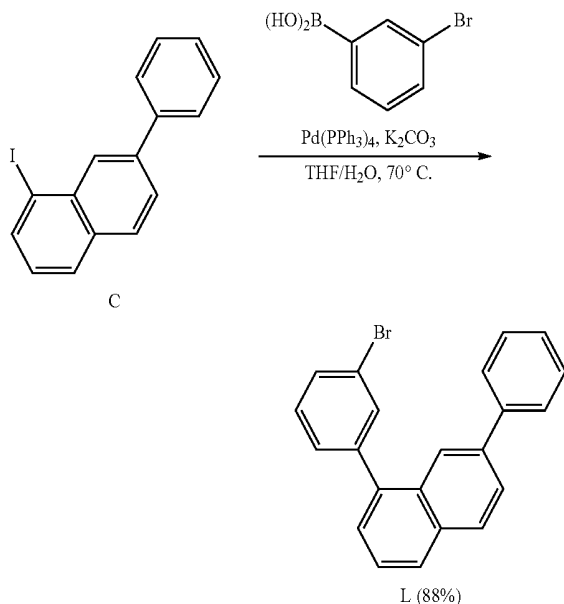
[0155] (Synthesis of Intermediate L)

[0156] Intermediate L was synthesized by conducting the same synthetic method of Intermediate D except for using 3-bromophenylboronic acid instead of 4-bromophenylboronic acid in the synthetic method of Intermediate D.

[0157] The molecular weight of Intermediate L measured by GC-MS was 358.

[0158] (Synthesis of Compound 94)

-continued

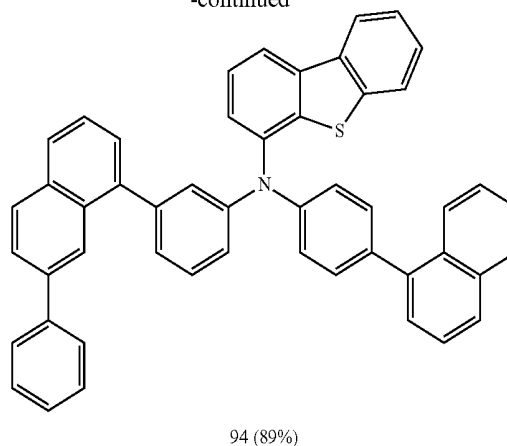


[0159] Compound 94 was synthesized by conducting the same synthetic method of Compound 17 except for using Intermediate L instead of Intermediate F in the synthetic method of Compound 17.

[0160] The molecular weight of Compound 94 measured by FAB-MS was 679.

[0161] [^1H NMR (CDCl_3 , 25°C ., 300 Hz) δ =8.77-8.36 (m, 12H), 8.33 (d, J =8.5 Hz, 2H), 8.00 (d, J =8.3 Hz, 2H), 7.85-7.70 (m, 6H), 7.58 (d, J =8.5 Hz, 4H), 7.51-7.42 (m, 4H), 7.34-7.24 (m, 3H)]



[0162] 5. Synthesis of Compound 80

[0163] Compound 80, a monoamine compound according to an example embodiment, may be synthesized, for example, as follows.

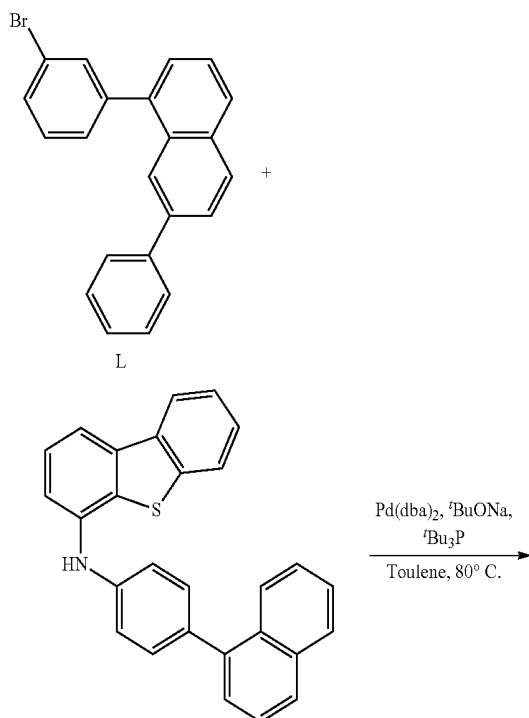[0164] (Synthesis of Intermediate N)

[0165] Intermediate N was synthesized by conducting the same synthetic method of Intermediate F except for using Intermediate M instead of Intermediate E in the synthetic method of Intermediate F.

[0166] The molecular weight of Intermediate N measured by GC-MS was 314.

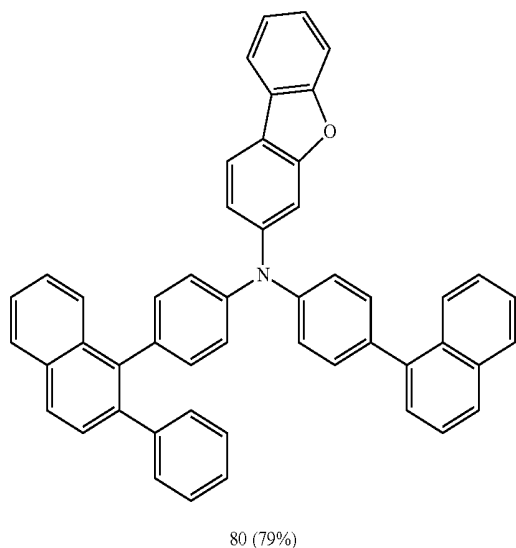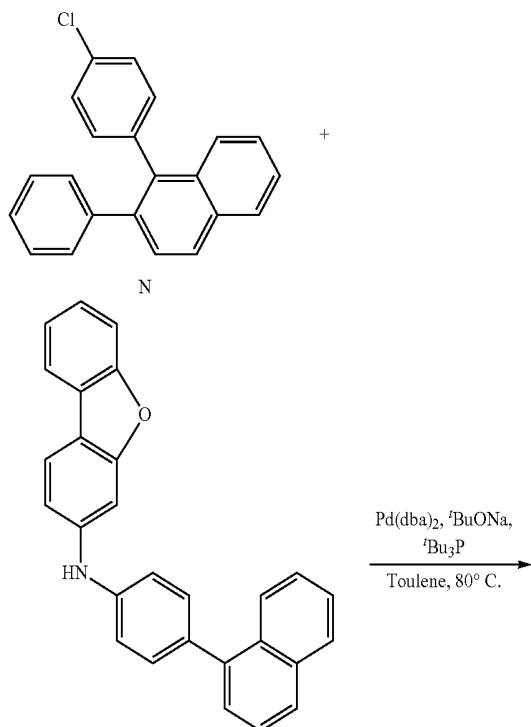
[0167] (Synthesis of Compound 80)

[0168] Compound 80 was synthesized by conducting the same synthetic method of Compound 17 except for using Intermediate N instead of Intermediate F and using N-(4-(naphthalen-1-yl)phenyl)-3-dibenzofuranamine instead of N-[4-(1-naphthalenyl)phenyl]-3-dibenzothiophenamine in the synthetic method of Compound 17 (yield 79%).


[0169] The molecular weight of Compound 80 measured by FAB-MS was 663.

[0170] ¹H NMR (CDCl₃, 25° C., 300 Hz) δ=8.97-8.94 (m, 2H), 8.55 (d, J=8.2 Hz, 1H), 8.33-8.00 (m, 6H), 7.73-

7.60 (m, 5H), 7.55-7.51 (m, 6H), 7.49-7.46 (m, 6H), 7.44-7.28 (m, 6H), 6.97 (d, J=8.3 Hz, 1H)]

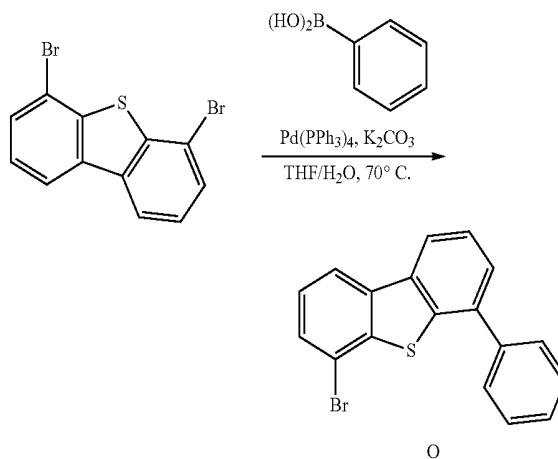[0171] 6. Synthesis of Compound 105**[0172]** (Synthesis of Intermediate O)

[0173] Intermediate O synthesized by conducting the same synthetic method of Intermediate E except for using 4,6-dibromodibenzothiophene (22.4 g) instead of 1,5-dibromonaphthalene in the synthetic method of Intermediate E (yield 66%).

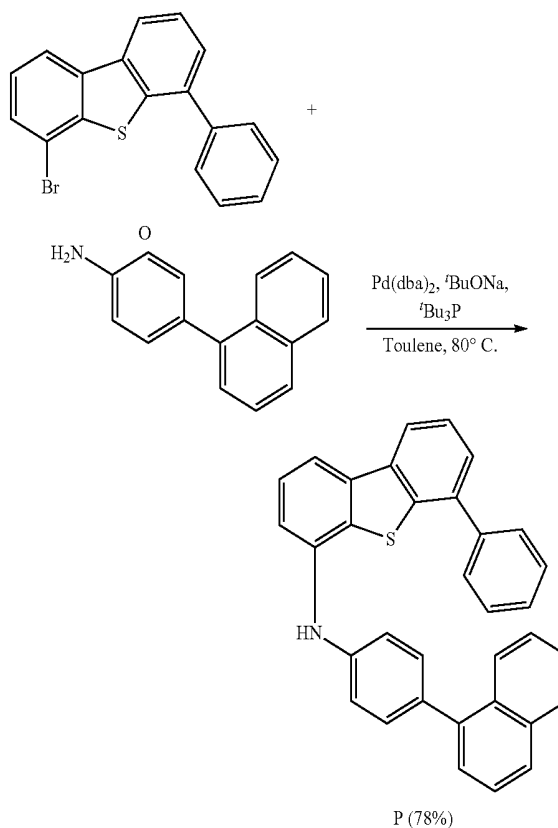
[0174] (Synthesis of Intermediate P)

[0175] Intermediate P was synthesized by conducting the same synthetic method of Compound 1 except for using

Intermediate O instead of Intermediate D and using N-[4-(1-naphthalenyl)phenyl]amine instead of N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine in the synthetic method of Compound 1.

[0176] The molecular weight of Intermediate P measured by FAB-MS was 477.

[0177] (Synthesis of Compound 105)

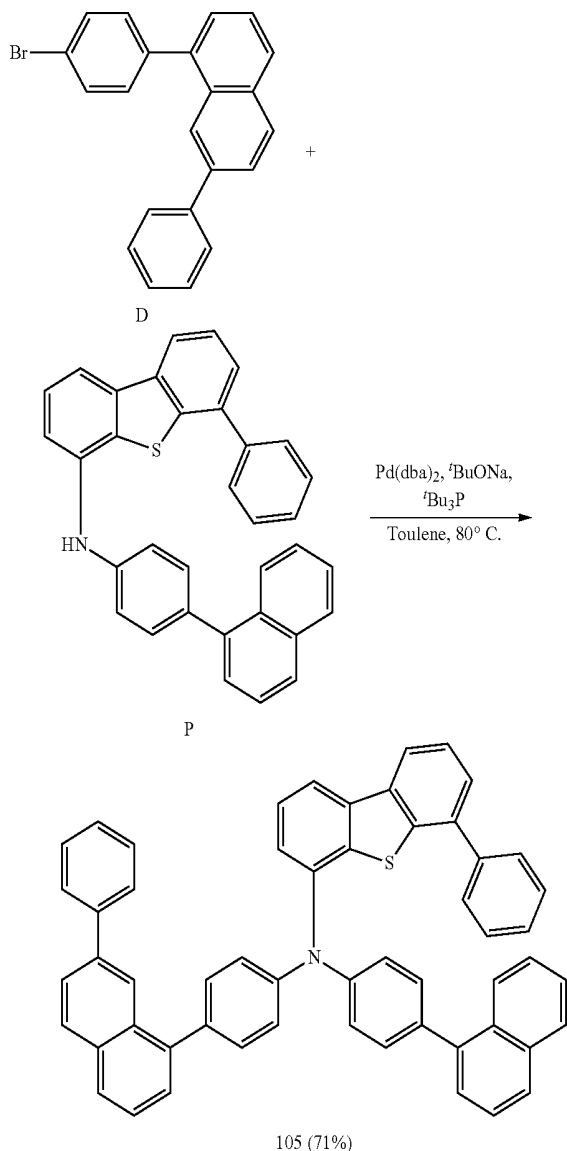

[0178] Compound 105 was synthesized by conducting the same synthetic method of Compound 1 except for using Intermediate P instead of N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine in the synthetic method of Compound 1 (yield 71%).


[0179] The molecular weight of Compound 105 measured by FAB-MS was 755.

[0180] $^1\text{H NMR}$ (CDCl_3 , 25° C. , 300 Hz) δ =8.85 (d, J =8.2 Hz, 1H), 8.55-8.52 (m, 3H), 8.44 (d, J =8.1 Hz, 1H), 8.35 (d, J =7.9 Hz, 1H), 8.21-8.08 (m, 4H), 8.01 (s, 1H),

7.80-7.69 (m, 5H), 7.64-7.54 (m, 6H), 7.50-7.40 (m, 6H), 7.38-7.33 (m, 7H)]

[0181] 7. Synthesis of Compound 117


[0182] (Synthesis of Intermediate R)

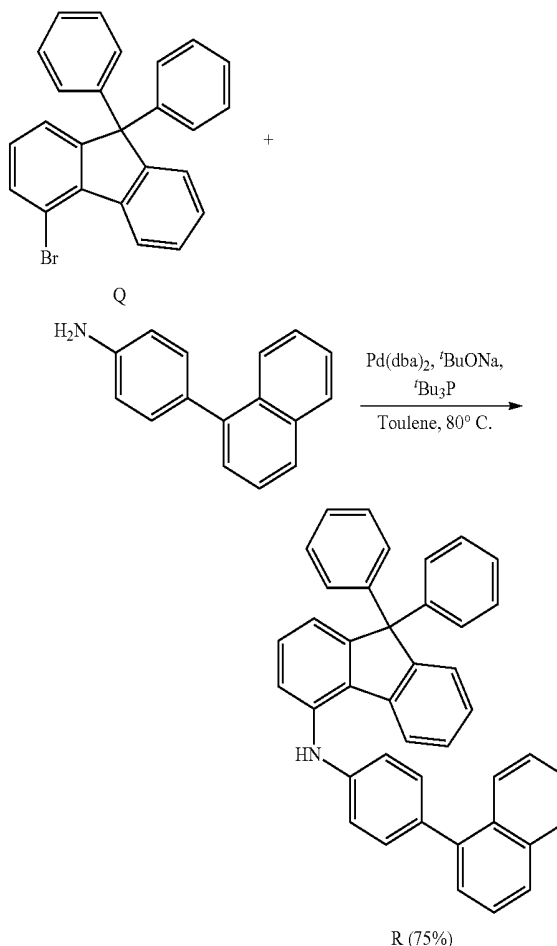


[0183] Intermediate R was synthesized by conducting the same synthetic method of Compound 1 except for using Intermediate Q instead of Intermediate D and using N-[4-(1-naphthalenyl)phenyl]amine instead of N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine in the synthetic method of Compound 1.

[0184] The molecular weight of Intermediate R measured by FAB-MS was 535.

[0185] (Synthesis of Compound 117)

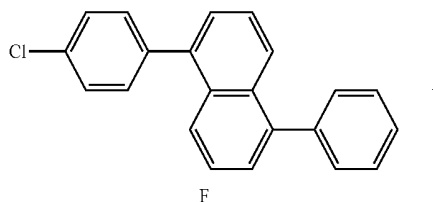

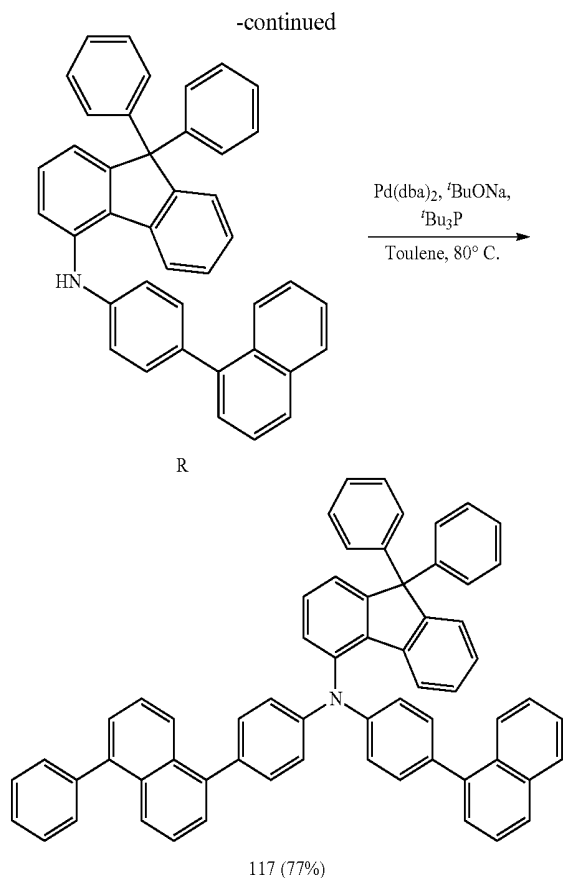



[0186] Compound 117 was synthesized by conducting the same synthetic method of Compound 17 except for using Intermediate R instead of N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine in the synthetic method of Compound 17 (yield 77%).

[0187] The molecular weight of Compound 117 measured by FAB-MS was 813.

[0188] [¹H NMR (CDCl₃, 25° C., 300 Hz) δ=8.99 (d, J=8.1 Hz, 1H), 8.90 (d, J=8.5 Hz, 1H), 8.87 (d, J=8.4 Hz, 1H), 8.54 (d, J=8.1 Hz, 1H), 8.38-8.37 (m, 2H), 8.24 (d, J=7.9 Hz, 1H), 8.11 (d, J=8.0 Hz, 1H), 7.99 (d, J=8.6 Hz, 1H), 7.81 (d, J=8.2 Hz, 2H), 7.80-7.69 (m, 3H), 7.60-7.54 (m, 5H), 4.48-4.40 (m, 4H), 7.38-7.35 (m, 6H), 7.29-7.21 (7H), 7.18-7.09 (m, 7H)]

[0189] 8. Synthesis of Compound 40

[0190] (Synthesis of Compound 40)

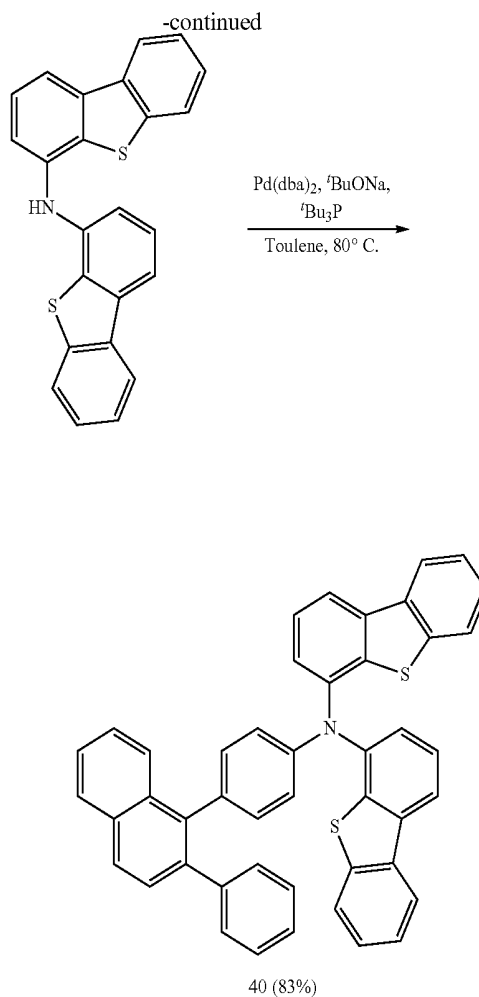



[0191] Compound 40 was synthesized by conducting the same synthetic method of Compound 17 except for using Intermediate N instead of Intermediate F and using N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine in the synthetic method of Compound 17. The molecular weight of Compound 40 measured by FAB-MS was 659.

[0192] [¹H NMR (CDCl₃, 25° C., 300 Hz) δ=8.87 (d, J=7.5 Hz, 1H), 8.50 (d, J=7.7 Hz, 2H), 8.37-8.30 (m, 2H), 8.15 (m, 2H), 8.01 (d, J=7.5 Hz, 2H), 7.85 (d, J=8.2 Hz, 2H), 7.76 (d, J=8.1 Hz, 1H), 7.60 (m, 2H), 7.53-7.49 (m, 7H), 7.46 (d, J=8.3 Hz, 2H), 7.42-7.39 (m, 4H), 7.37 (d, J=8.3 Hz, 2H)]

[0193] 9. Synthesis of Compound 189


[0194] (Synthesis of Compound 189)

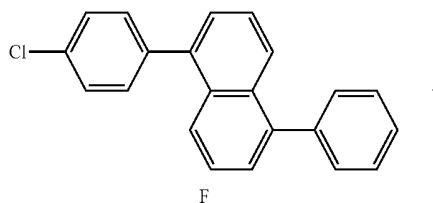

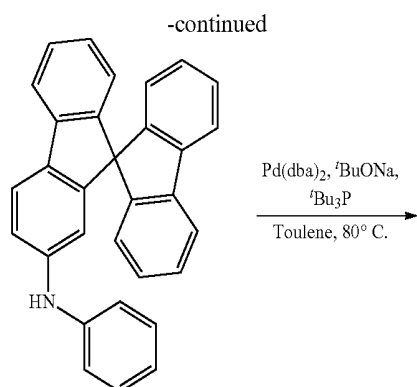

[0199] Intermediate Q was synthesized by conducting the same synthetic method of Intermediate L except for using 2-(7-bromodibenzofuran-3-yl)-4,4,5,5-tetramethyl-1,3,2-dioxaborolane instead of 3-bromophenylboronic acid in the synthetic method of Intermediate L. The molecular weight of Intermediate Q measured by FAB-MS was 449.

[0200] (Synthesis of Compound 203)

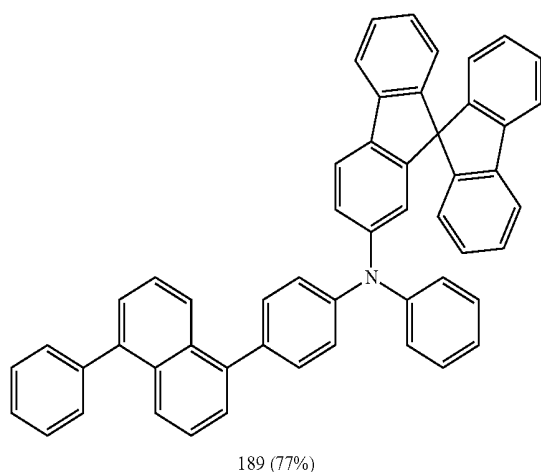


[0195] Compound 189 was synthesized by conducting the same synthetic method of Compound 17 except for using N-phenyl-9,9'-spirobisfluorene-2-amine instead of N-[4-(1-naphthalenyl)phenyl]-4-dibenzothiophenamine in the synthetic method of Compound 17. The molecular weight of Compound 189 measured by FAB-MS was 685.

[0196] [¹H NMR (CDCl₃, 25° C., 300 Hz) δ=8.79 (m, 2H), 8.44 (m, 2H), 7.92-7.82 (m, 4H), 7.79 (d, J=8.2 Hz, 2H), 7.68 (m, 2H), 7.60 (d, J=8.1 Hz, 2H), 7.50-7.41 (m, 7H), 7.39-7.33 (m, 4H), 7.29-7.23 (m, 9H), 7.12 (t, J=8.2 Hz, 1H)]

[0197] 10. Synthesis of Compound 203

[0198] (Synthesis of Intermediate Q)

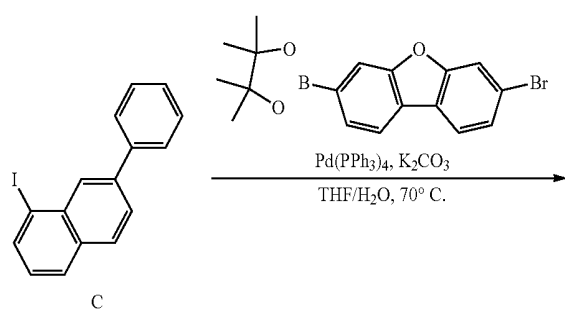


[0201] Compound 203 was synthesized by conducting the same synthetic method of Compound 1 except for using Intermediate Q instead of Intermediate D in the synthetic

method of Compound 1. The molecular weight of Compound 203 measured by FAB-MS was 769.

[0202] $^1\text{H NMR}$ (CDCl_3 , 25°C ., 300 Hz) $\delta=8.90$ (d, $J=7.9$ Hz, 1H), 8.61 (d, $J=8.2$ Hz, 1H), 8.56 (d, $J=8.1$ Hz, 1H), 8.45-8.41 (m, 2H), 8.25-8.21 (m, 2H), 8.14-8.07 (m, 2H), 8.01-7.98 (m, 3H), 7.91-7.75 (m, 7H), 7.60-7.51 (m, 10H), 7.42-7.35 (m, 5H), 6.99 (d, $J=7.9$ Hz, 1H)]


[0203] 11. Synthesis of Compound 206

[0204] (Synthesis of Intermediate R)

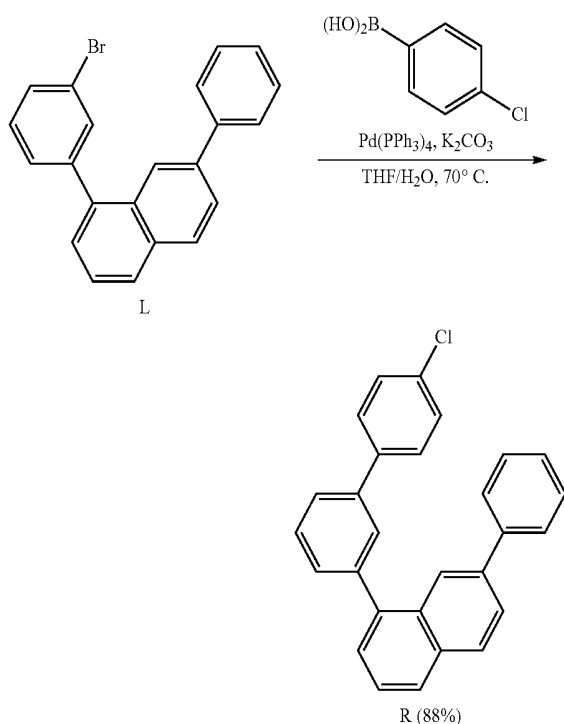


[0205] Intermediate R was synthesized by conducting the same synthetic method of Intermediate F except for using Intermediate L instead of Intermediate E in the synthetic method of Intermediate F. The molecular weight of Intermediate R measured by FAB-MS was 390.

[0206] (Synthesis of Compound 206)

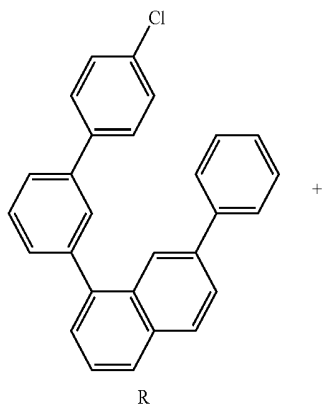

-continued

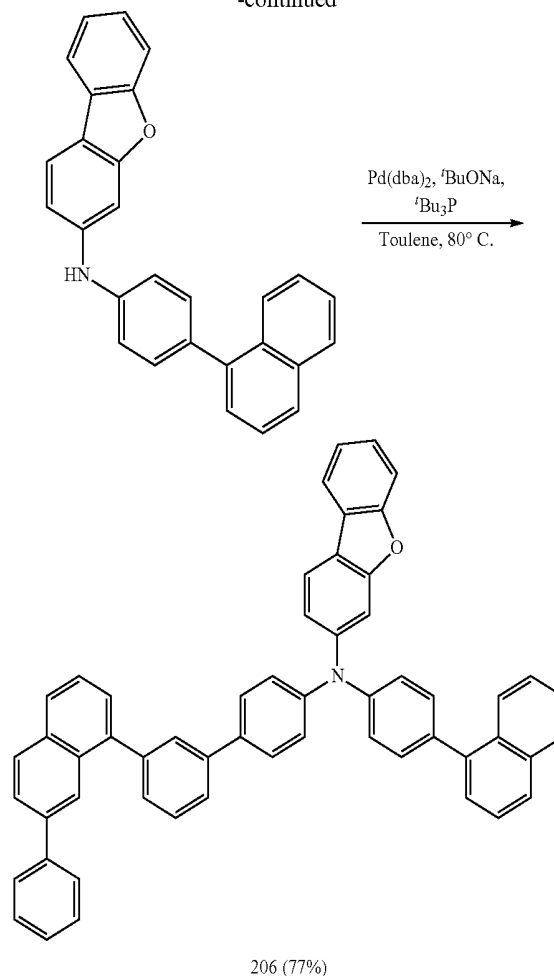

[0207] Compound 206 was synthesized by conducting the same synthetic method of Compound 80 except for using Intermediate R instead of Intermediate N in the synthetic method of Compound 80. The molecular weight of Compound 206 measured by FAB-MS was 739.

[0208] $^1\text{H NMR}$ (CDCl_3 , 25°C ., 300 Hz) $\delta=8.81$ (d, $J=7.9$ Hz, 1H), 8.66 (d, $J=8.1$ Hz, 1H), 8.54 (d, $J=8.1$ Hz, 1H), 8.46 (m, 1H), 8.31 (m, 1H), 8.21 (m, 1H), 8.10-8.01 (m, 3H), 7.98-7.95 (m, 2H), 7.84 (m, 1H), 7.79-7.74 (4H), 6.69-7.61 (m, 3H), 7.55-7.41 (m, 12H), 7.38-7.35 (m, 6H), 7.01 (d, $J=8.0$ Hz, 1H)]

[0209] The above-described synthesis examples are illustrated for assisting the understanding of those skilled in the art, and the reaction conditions may be modified if desired. Furthermore, the compound according to an example embodiment may be synthesized to have a variety of substituents by using various methods and materials. The compound may have features suitable for an organic electroluminescence device by introducing a variety of substituents to the core structure represented by Formula 1.


[0210] (Device Manufacturing Example)

[0211] Organic electroluminescence devices of Examples 1 to 11 were manufactured by using the above Compounds 1, 17, 71, 94, 80, 105, 117, 40, 189, 203, and 206 as an electron blocking material.


[0212] [Example Compounds]

-continued


80

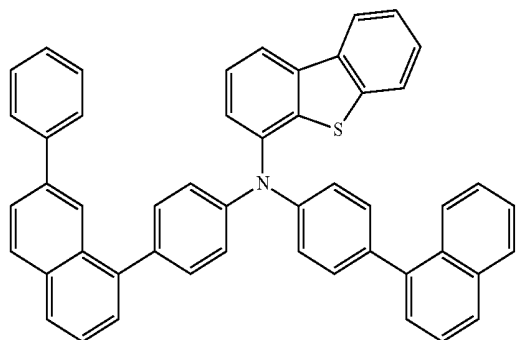


1

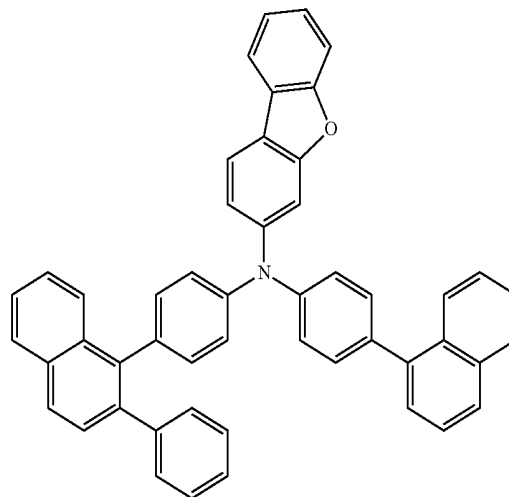


17

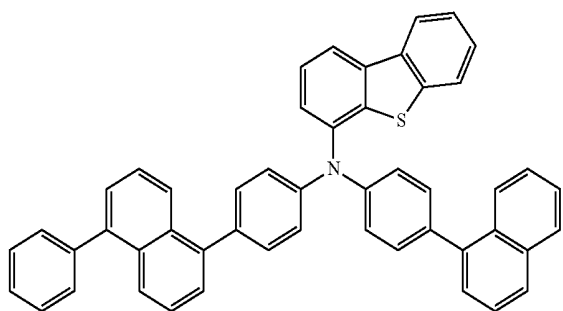



71

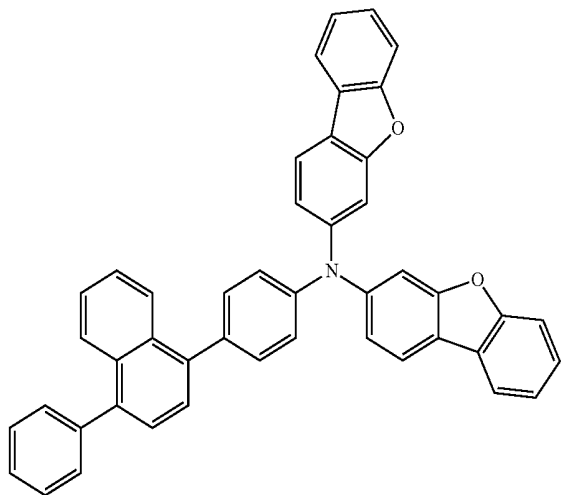

94

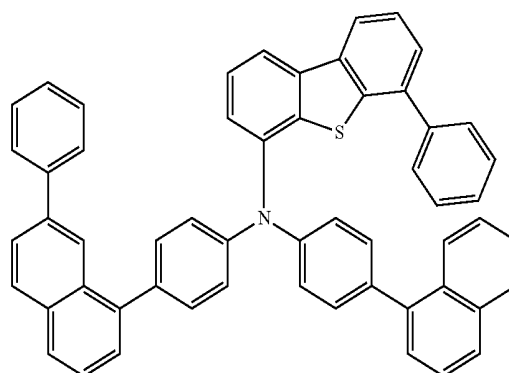


105

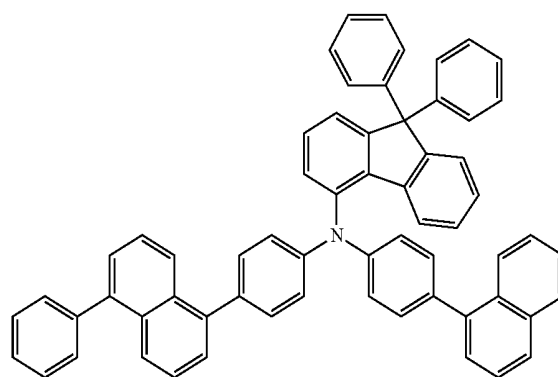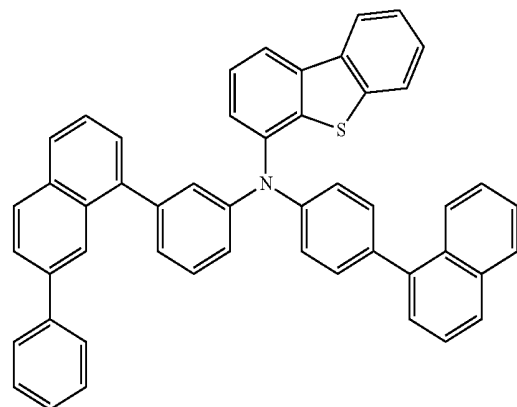


117

-continued


40

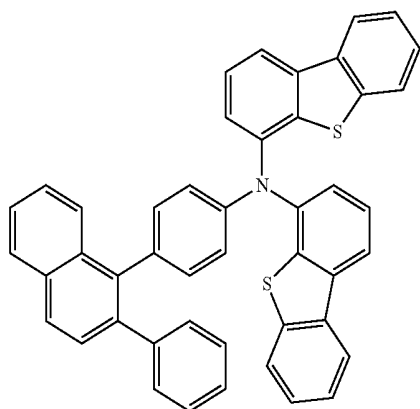


189

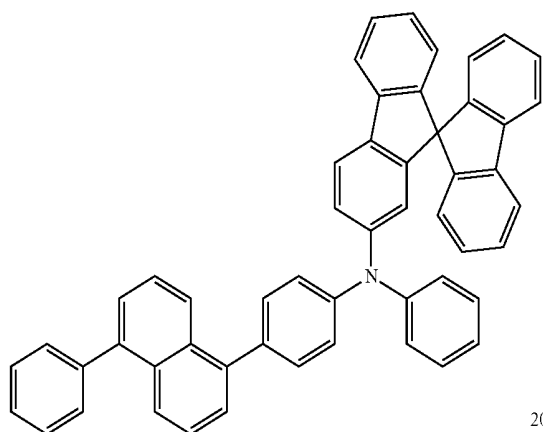

203

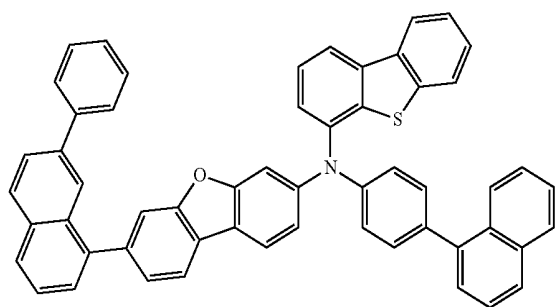


206

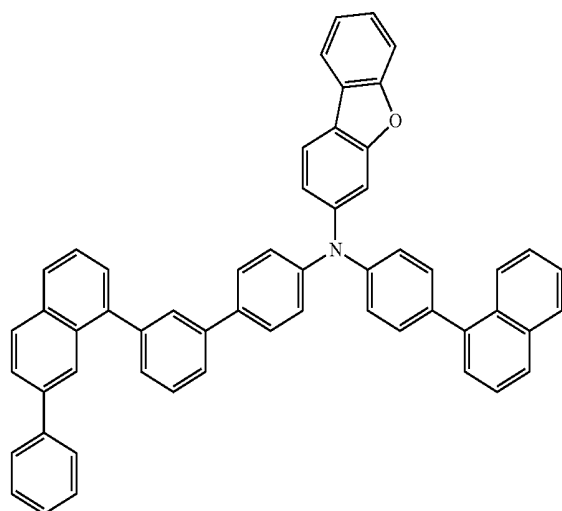


[0213] Organic electroluminescent devices of Comparative Examples 1 to 9 were manufactured by using the following Comparative Compounds A-1 to A-9.

[0214] [Comparative Compounds]


A-1

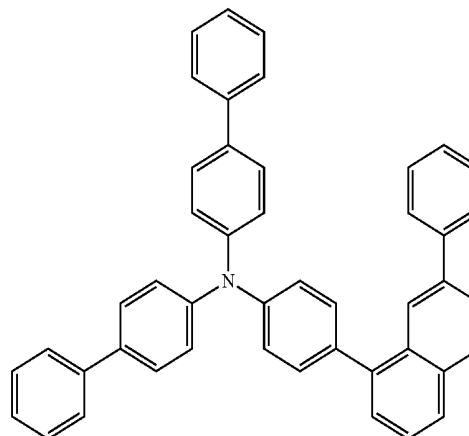

A-2

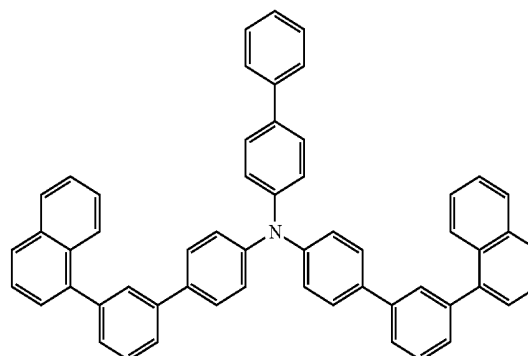


A-3

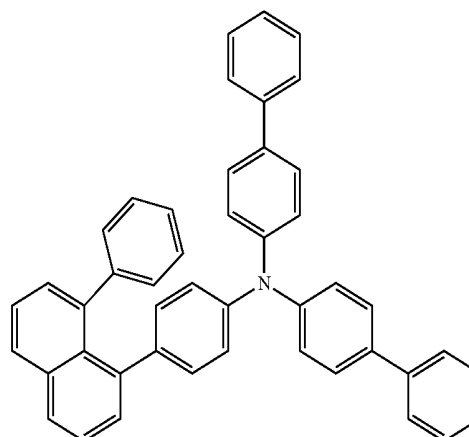


-continued


A-4

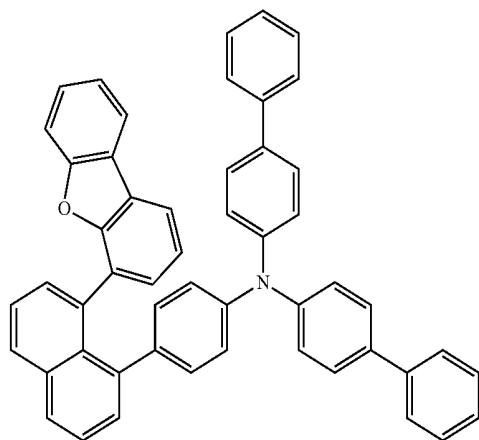


A-5

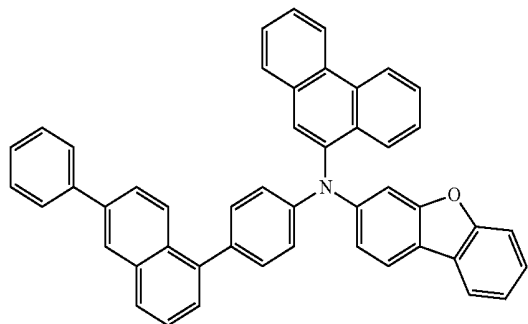

A-6

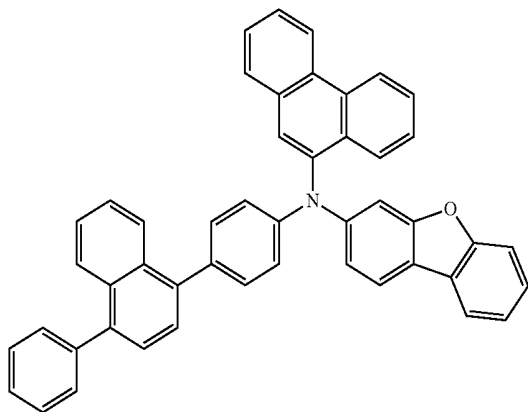


A-7

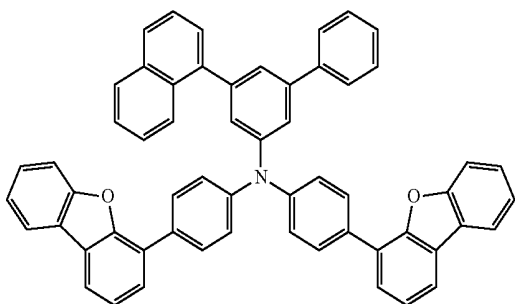


-continued


A-8

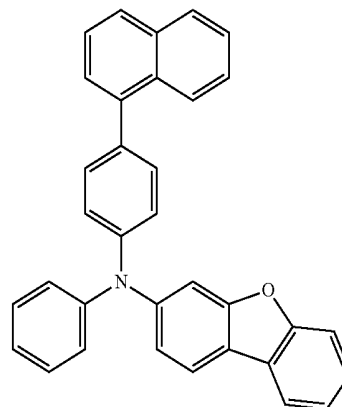

A-9


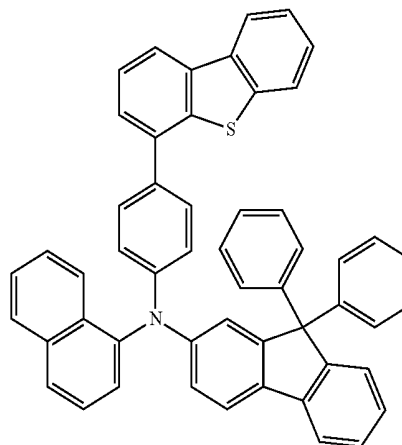


[0215] The organic electroluminescence devices according to Examples 1 to 11 and Comparative Examples 1 to 9 were manufactured by forming a first electrode using ITO to a thickness of about 150 nm, a hole injection layer using HT1 doped with 2% HIL to a thickness of about 10 nm, a hole transport layer using HT1 to a thickness of about 120 nm, an electron blocking layer using the example compounds or the comparative compounds to a thickness of about 10 nm, an emission layer using BH doped with 2% BD to a thickness of about 30 nm, a hole blocking layer using ET1 to a thickness of about 10 nm, an electron transport layer using ET2 to a thickness of about 20 nm, an electron injection layer using LiF to a thickness of about 1 nm, and a second electrode using a Mg/Ag alloy co-deposited at a volumetric ratio of 9:1 to a thickness of about 120 nm. Each layer was formed by a vacuum deposition method.




-continued

HT1

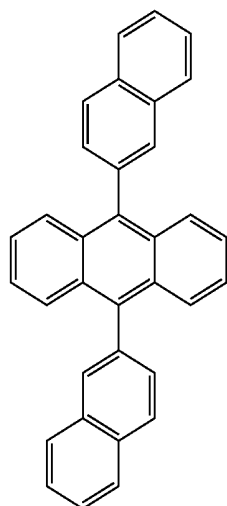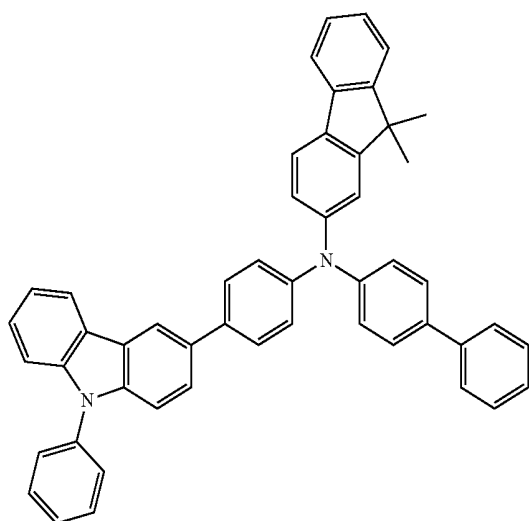


BH

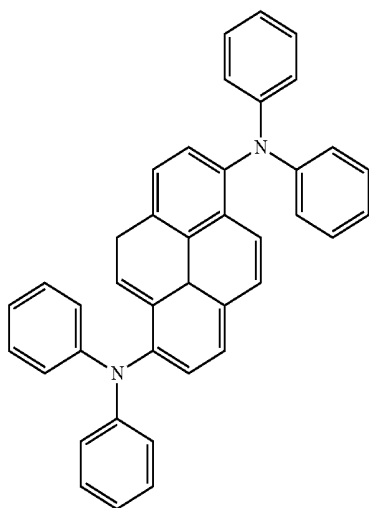


BD

-continued

ET1

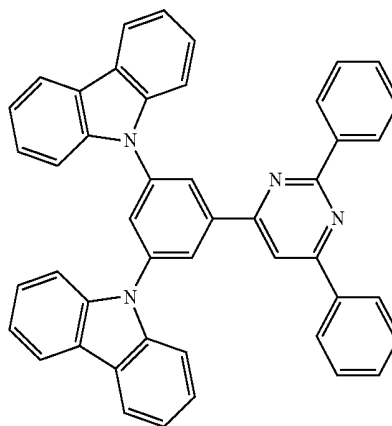

ET2

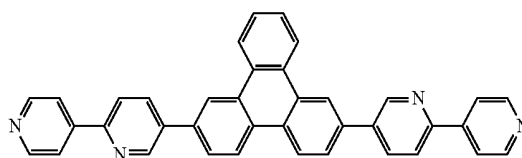

[0216] The voltage, half-life, emission efficiency, and color coordinate of the organic electroluminescence devices manufactured in Examples 1 to 11 and Comparative Examples 1 to 9 are shown in Table 1 below.

TABLE 1

	Electron blocking layer	Voltage (V)	Life LT50 (h)	Emission efficiency (cd/A)	Color coordinate CIE (x, y)
Example 1	Example Compound 1	4.5	182	5.3	0.141, 0.052
Example 2	Example Compound 17	4.7	189	5.1	0.142, 0.052
Example 3	Example Compound 71	4.7	200	4.9	0.141, 0.051
Example 4	Example Compound 94	4.7	183	5.4	0.141, 0.051
Example 5	Example Compound 80	4.6	193	5.4	0.141, 0.052
Example 6	Example Compound 105	4.7	182	5.4	0.141, 0.052
Example 7	Example Compound 117	4.7	178	5.1	0.141, 0.051
Example 8	Example Compound 40	4.6	184	5.5	0.142, 0.052
Example 9	Example Compound 189	4.5	188	5.2	0.142, 0.051
Example 10	Example Compound 203	4.7	187	5.0	0.141, 0.051
Example 11	Example Compound 206	4.6	186	5.4	0.140, 0.052
Comparative Example 1	Comparative Compound A-1	4.8	167	4.1	0.141, 0.052
Comparative Example 2	Comparative Compound A-2	4.9	160	3.8	0.140, 0.051
Comparative Example 3	Comparative Compound A-3	4.8	164	3.9	0.140, 0.052
Comparative Example 4	Comparative Compound A-4	5.1	160	4.0	0.140, 0.051
Comparative Example 5	Comparative Compound A-5	4.8	163	4.1	0.141, 0.053
Comparative Example 6	Comparative Compound A-6	5.1	160	4.1	0.141, 0.050

TABLE 1-continued

	Electron blocking layer	Voltage (V)	Life LT50 (h)	Emission efficiency (cd/A)	Color coordinate CIE (x, y)
Comparative Example 7	Comparative Compound A-7	5.1	160	4.0	0.140, 0.051
Comparative Example 8	Comparative Compound A-8	4.9	160	4.1	0.141, 0.052
Comparative Example 9	Comparative Compound A-9	5.0	163	4.1	0.141, 0.052

[0217] In the above table, the emission efficiency was a measured value at a current density of about 10 mA/cm², and the half-life was a value at about 1.0 mA/cm².

[0218] Referring to the results in Table 1, it may be found that the organic electroluminescence devices of Examples 1 to 11 had decreased driving voltage, extended life and enhanced efficiency when compared with those of Comparative Examples 1 to 9. The monoamine compound according to an example embodiment includes a phenyl group with a high thermal resistance and electric charge resistance, which may help provide an extended device life. Furthermore, the monoamine compound has a bulky naphthyl group substituted with a phenyl group, which decreases symmetry of molecule and may inhibit crystallization, and may thus enhance the quality of layers and help provide high efficiency of the device.

[0219] The organic electroluminescence devices of Examples 1 to 11 use the example compounds including a naphthyl group connected to the nitrogen atom at position 1 via a linker, which may inhibit crystallization due to the bulky molecular structure, to thereby enhance quality of layers and attain improved emission efficiency.

[0220] The organic electroluminescence device of Comparative Example 1 uses an amine compound including a phenyl group but not a condensed ring connected to the nitrogen atom, which results in low electric charge resistance, thereby decreasing device life. The organic electroluminescence device of Comparative Example 2 uses an amine compound including a naphthyl group but not a phenyl group, which results in low electric charge resistance, thereby decreasing device life and emission efficiency due to the insufficient quality of layers.

[0221] The organic electroluminescence devices of Comparative Examples 3 and 4 use Comparative Compounds A-3 and A-4 including a substituted naphthyl group but not a condensed ring connected directly to the nitrogen atom, which results in low electric charge resistance, thereby decreasing device life. Furthermore, Comparative Compounds A-3 and A-4 have a bulky naphthyl group with substituents at both positions 1 and 8, which results in easy decomposition and long intermolecular distance, thereby delaying hole transport and decreasing device life and efficiency when compared with those of Examples.

[0222] The organic electroluminescence devices of Comparative Examples 5 and 6 use Comparative Compounds A-5 and A-6 including a phenanthrene ring having more than 12 ring carbon atoms, which causes a strong molecular stacking and increased deposition temperature, thereby resulting in easy thermal decomposition and decreasing efficiency and device life.

[0223] The organic electroluminescence device of Comparative Example 7 uses Comparative Compound A-7 including fused heterocycles connected to the nitrogen atom

via p-phenylene group, which results in weak stabilizing effect of amine, thereby decreasing device life. The organic electroluminescence device of Comparative Example 8 uses Comparative Compound A-8 including a fused heterocycle connected directly to the nitrogen atom but not including a phenyl group, which results in weak stabilizing effect of amine, thereby decreasing device life.

[0224] The organic electroluminescence device of Comparative Example 9 uses Comparative Compound A-9 including a naphthyl group connected directly to the amine group, which results in easy decomposition due to the bulky amine group, thereby decreasing device life. Furthermore, Comparative Compound A-9 includes both a fluorenyl group and a fused heterocycle, which weakens the electric charge balance in the device due to excessive introduction of substituents with strong electric charge transport property, thereby decreasing device life and efficiency.

[0225] By way of summation and review, in an application of an organic electroluminescence device to a display, decrease of a driving voltage, increase of emission efficiency and extension of life for the organic electroluminescence device are desired, and development of a material which may stably implement these requirements in the organic electroluminescence device is also desired.

[0226] Embodiments may provide an organic electroluminescence device and a monoamine compound for an organic electroluminescence device. Embodiments may provide an organic electroluminescence device with high efficiency and a monoamine compound included in a hole transport region of an organic electroluminescence device.

[0227] The monoamine compound according to an example embodiment may be used as a material for a hole transport region of an organic electroluminescence device, which may contribute to a decrease of a driving voltage, increase of emission efficiency, and extension of life for the organic electroluminescence device.

[0228] The organic electroluminescence device according to an example embodiment may have high efficiency.


[0229] The monoamine compound according to an example embodiment may be used as a material for a hole transport region of an organic electroluminescence device, and may enhance efficiency and life of the organic electroluminescence device.

[0230] The monoamine compound according to an example embodiment may be used as a material for a hole transport region of an organic electroluminescence device, and may decrease a driving voltage of the organic electroluminescence device.

[0231] Example embodiments have been disclosed herein, and although specific terms are employed, they are used and are to be interpreted in a generic and descriptive sense only and not for purpose of limitation. In some instances, as would be apparent to one of ordinary skill in the art as of the filing of the present application, features, characteristics, and/or elements described in connection with a particular embodiment may be used singly or in combination with features, characteristics, and/or elements described in connection with other embodiments unless otherwise specifically indicated. Accordingly, it will be understood by those of skill in the art that various changes in form and details may be made without departing from the spirit and scope of the present invention as set forth in the following claims.

What is claimed is:

1. An organic electroluminescence device, comprising:
a first electrode;
a hole transport region on the first electrode;
an emission layer on the hole transport region;
an electron transport region on the emission layer; and
a second electrode on the electron transport region,
wherein the hole transport region includes a monoamine
compound represented by the following Formula 1:



[Formula 1]

wherein in Formula 1,

X is S, O or CRR',

R and R' are each independently a substituted or unsubstituted alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted aryl group having 6 to 20 ring carbon atoms, or a substituted or unsubstituted heteroaryl group having 2 to 10 ring carbon atoms, and are separate or form a ring by combining adjacent groups with each other,

L₁ and L₂ are each independently a direct linkage, a substituted or unsubstituted arylene group having 6 to 12 ring carbon atoms, or a substituted or unsubstituted heteroarylene group having 2 to 12 ring carbon atoms,


n and m are each independently an integer of 0 to 2,

R_A is a hydrogen atom, a substituted or unsubstituted alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 ring carbon atoms, or a substituted or unsubstituted heteroaryl group having 2 to 30 ring carbon atoms,

q is an integer of 0 to 7,

Ar₁ is a substituted or unsubstituted aryl group having 6 to 12 ring carbon atoms, or a substituted or unsubstituted heteroaryl group having 2 to 12 ring carbon atoms, provided that when X is CRR', Ar₁ does not include a heteroaryl group, and

FR is represented by the following Formula 2:



[Formula 2]


wherein in Formula 2,

R₁ is a hydrogen atom, a deuterium atom, or a halogen atom, and

a is an integer of 0 to 6.

2. The organic electroluminescence device as claimed in claim 1, wherein FR is represented by the following Formula 2-1:

[Formula 2-1]



wherein in Formula 2-1,

b is an integer of 0 to 5, and R₁ is the same as defined in Formula 2.

3. The organic electroluminescence device as claimed in claim 1, wherein n is 1, and L₁ is a substituted or unsubstituted arylene group having 6 to 12 ring carbon atoms.

4. The organic electroluminescence device as claimed in claim 3, wherein L₁ is a substituted or unsubstituted phenylene group.

5. The organic electroluminescence device as claimed in claim 4, wherein FR is substituted on the phenylene group at a para position to the amine nitrogen atom.

6. The organic electroluminescence device as claimed in claim 1, wherein m is 1, L₂ is a substituted or unsubstituted arylene group having 6 to 12 ring carbon atoms, and Ar₁ is a substituted or unsubstituted aryl group having 6 to 12 ring carbon atoms.

7. The organic electroluminescence device as claimed in claim 6, wherein L₂ is a substituted or unsubstituted phenylene group, and Ar₁ is a substituted or unsubstituted phenyl group, a substituted or unsubstituted biphenyl group, or a substituted or unsubstituted naphthyl group.

8. The organic electroluminescence device as claimed in claim 1, wherein m is 0, and Ar₁ is a substituted or unsubstituted heteroaryl group having 5 to 12 ring carbon atoms.

9. The organic electroluminescence device as claimed in claim 8, wherein Ar₁ is a substituted or unsubstituted dibenzofuran group, or a substituted or unsubstituted dibenzothiophene group.

10. The organic electroluminescence device as claimed in claim 1, wherein the hole transport region has a plurality of layers, and a layer of the plurality of layers contacting with the emission layer includes the monoamine compound represented by Formula 1.

11. The organic electroluminescence device as claimed in claim 1, wherein the hole transport region includes:






a hole injection layer on the first electrode;
a hole transport layer on the hole injection layer; and
an electron blocking layer on the hole transport layer, the electron blocking layer including the monoamine compound represented by Formula 1.

12. The organic electroluminescence device as claimed in claim 1, wherein the electron transport region includes:





a hole blocking layer on the emission layer;
an electron transport layer on the hole blocking layer; and
an electron injection layer on the electron transport layer.

13. The organic electroluminescence device as claimed in claim 1, wherein the monoamine compound represented by Formula 1 is selected from the following Compound Group 1:

[Compound Group 1]

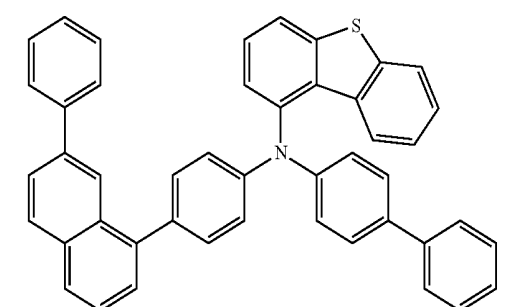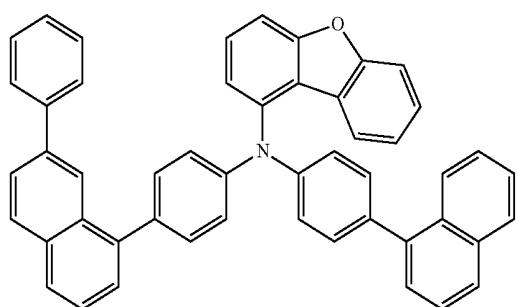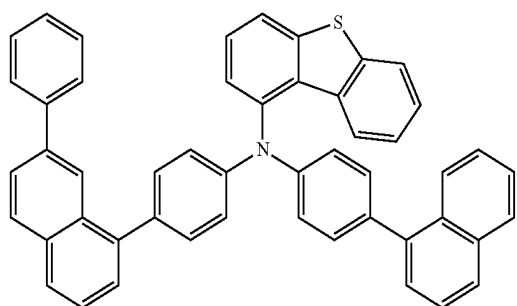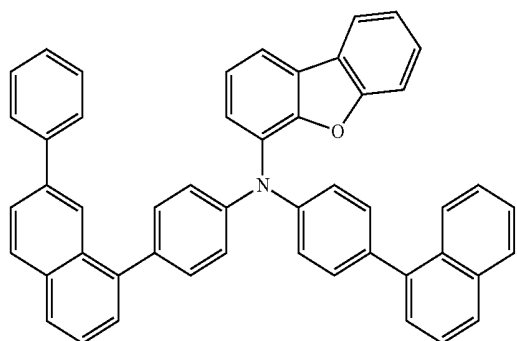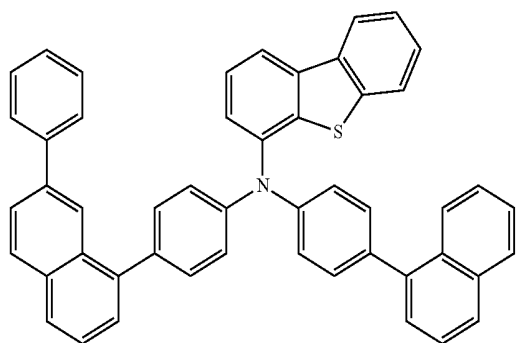


-continued

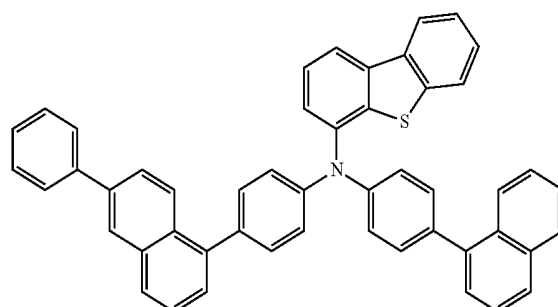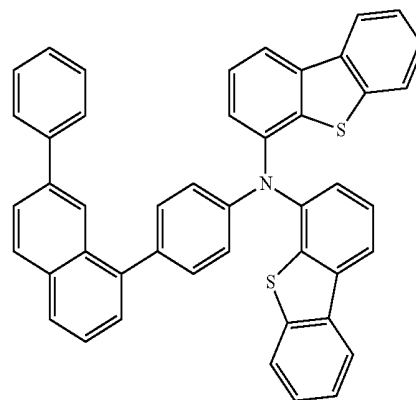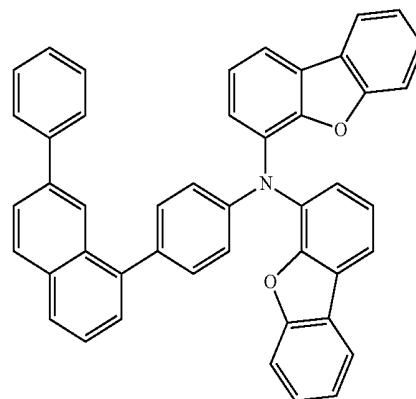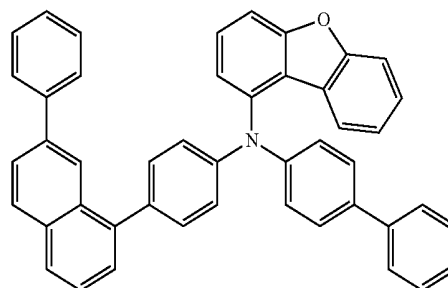


-continued


10

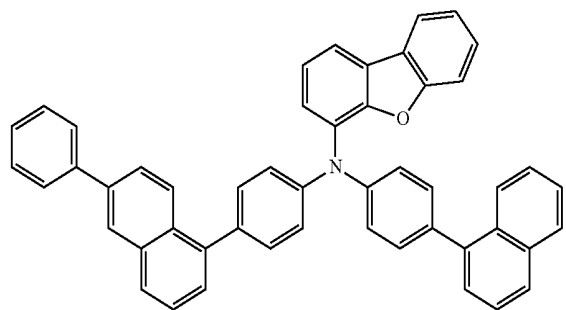


11

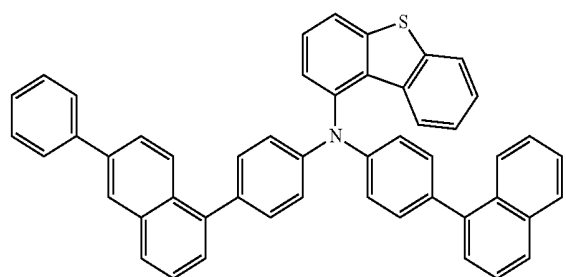


12

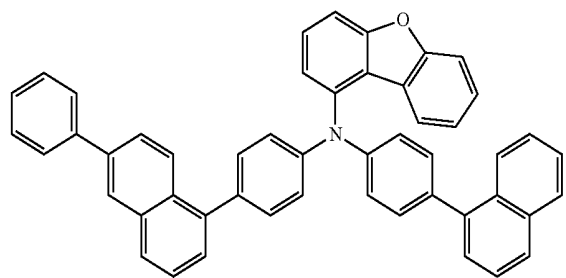

13

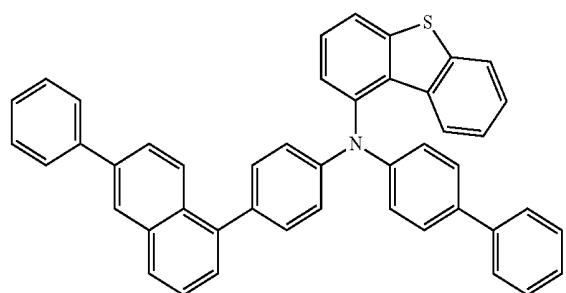


14

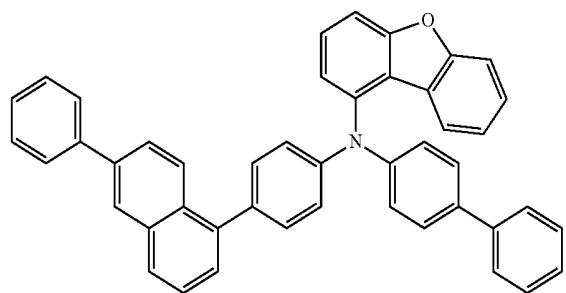


-continued


15

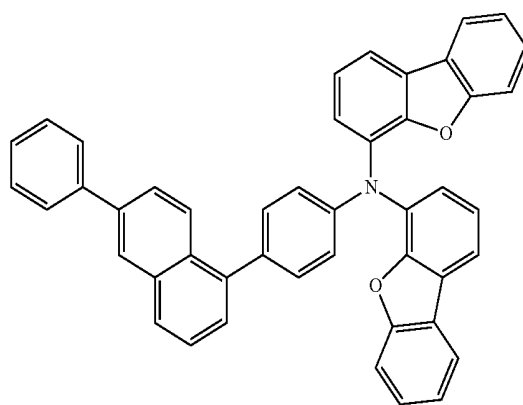


16

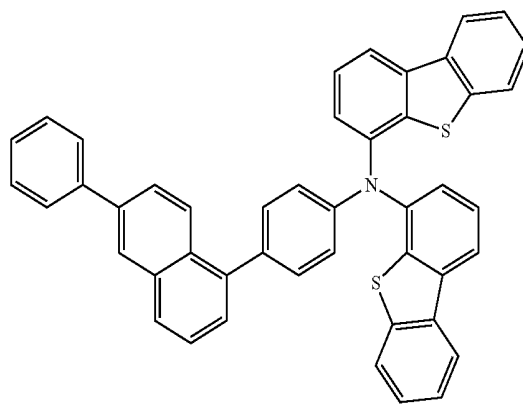


17

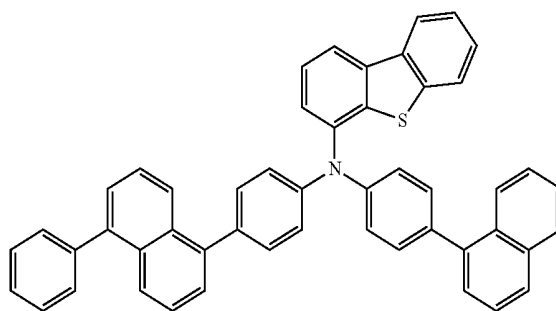


18

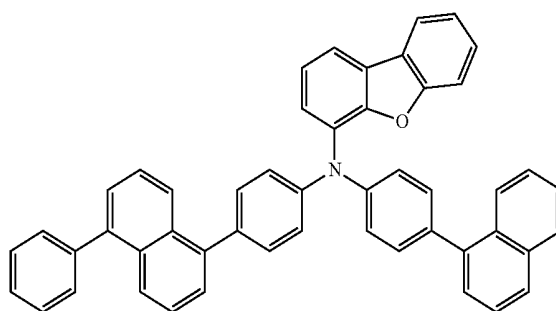


-continued

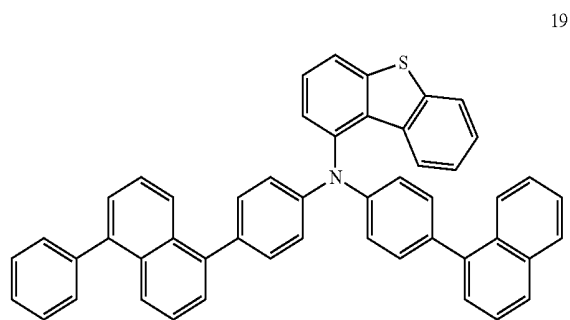


19

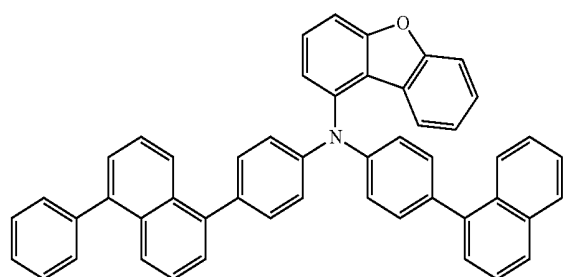


20

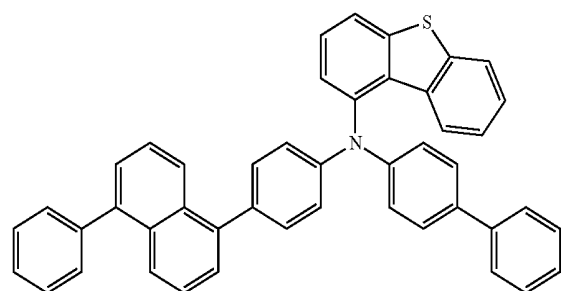

21

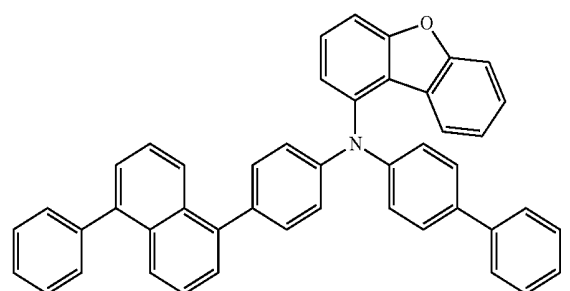


22

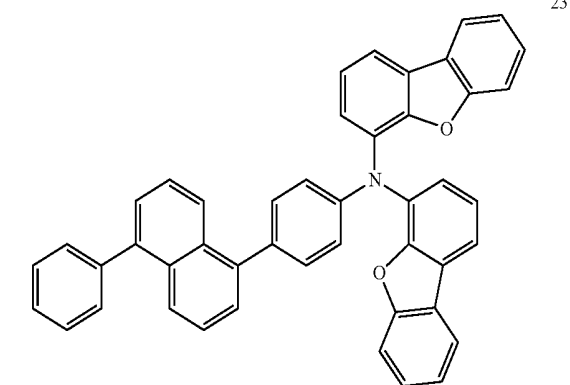


23


-continued

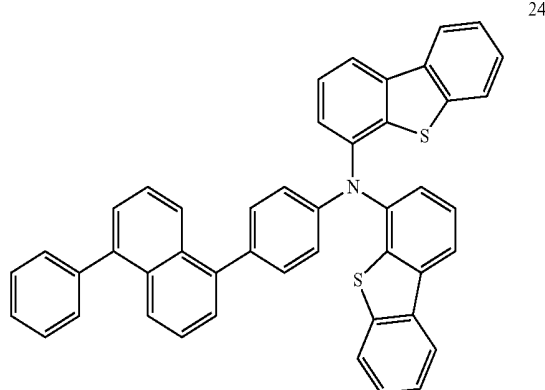


24

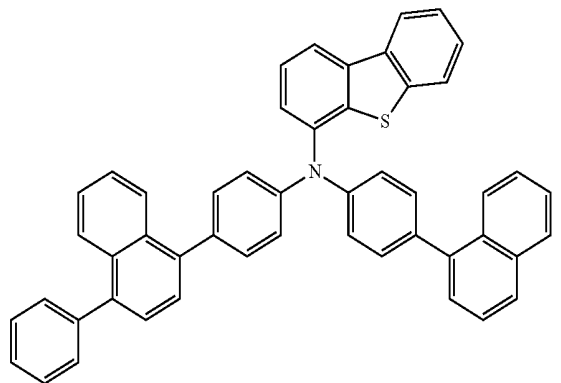

25

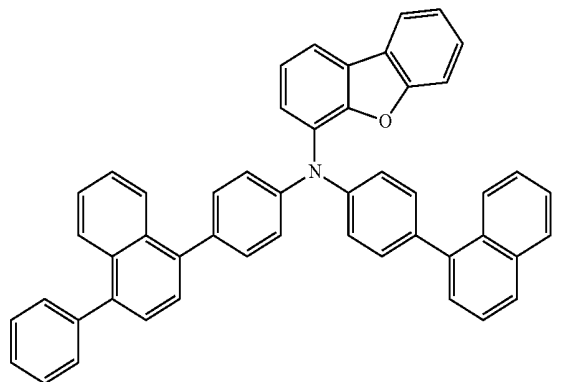


26

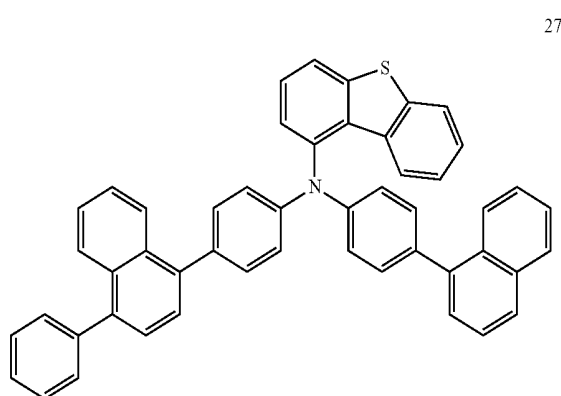


27

-continued


28

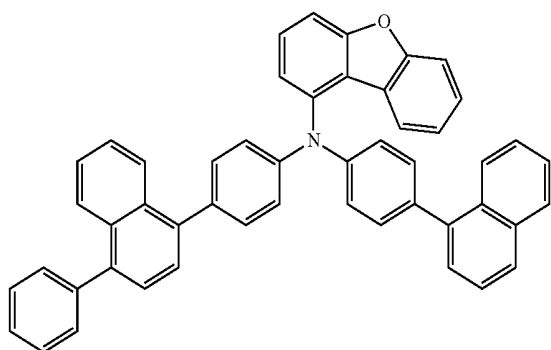


29

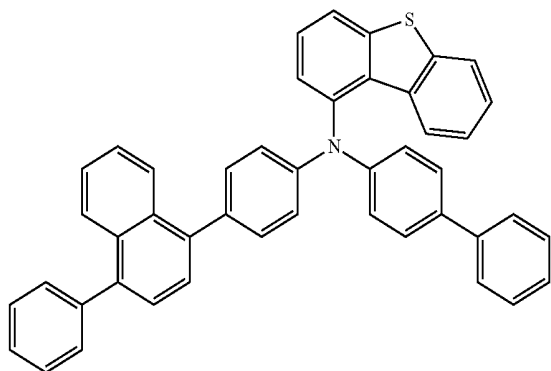

30

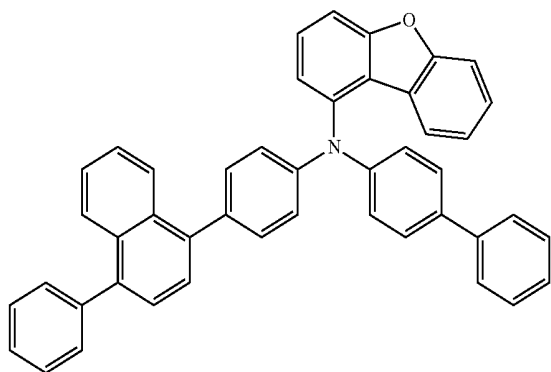


31

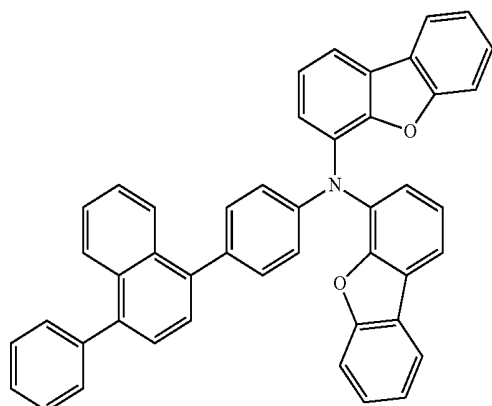


-continued


32

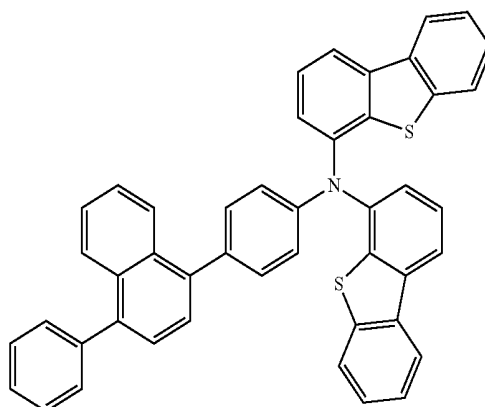


33

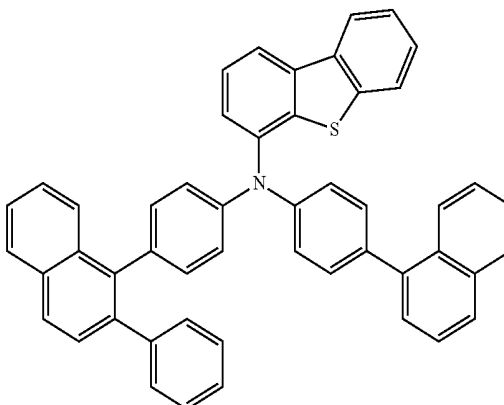


34

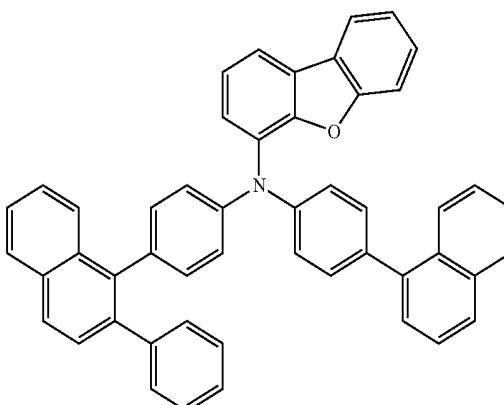

35

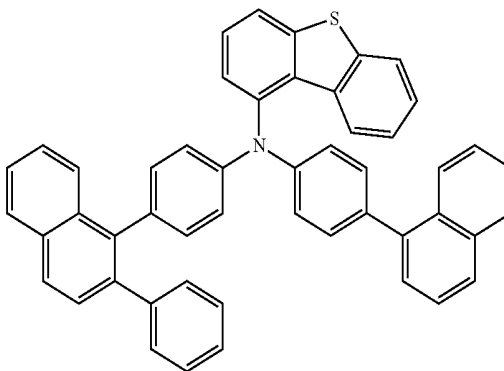


-continued

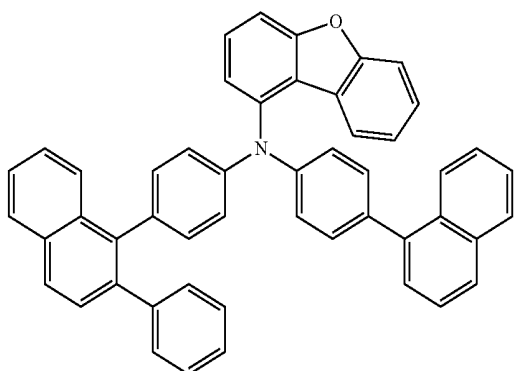


36

-continued

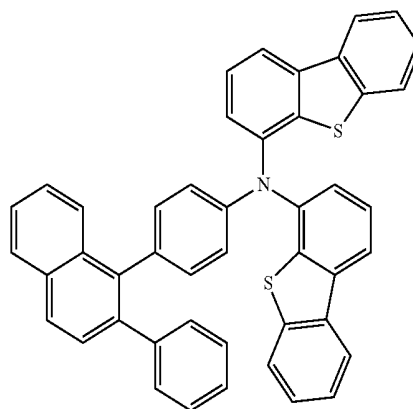


40


37

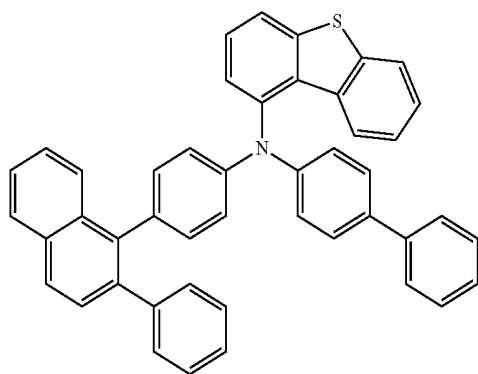

41


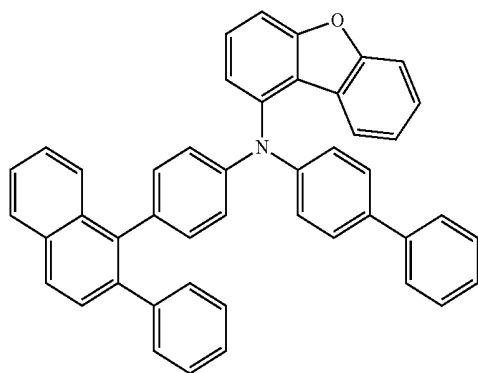


38

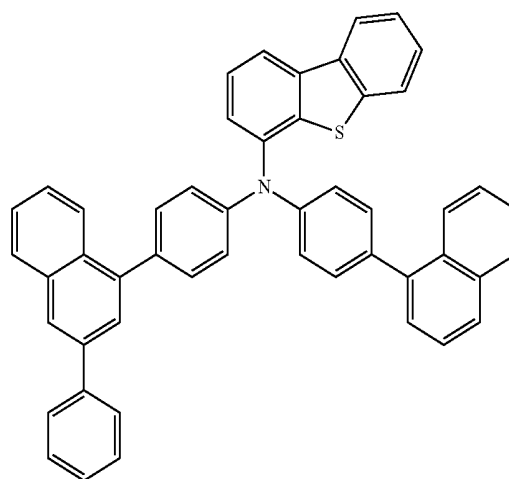


42

39

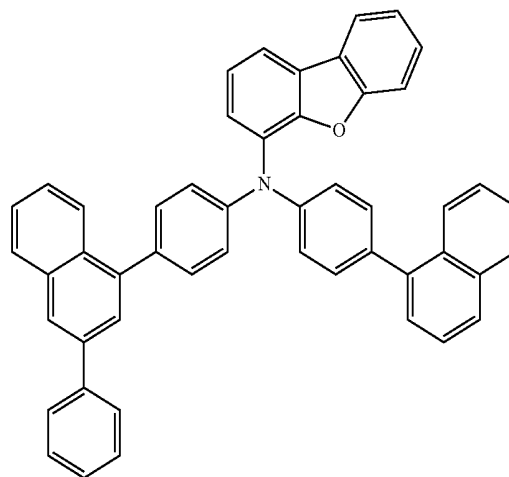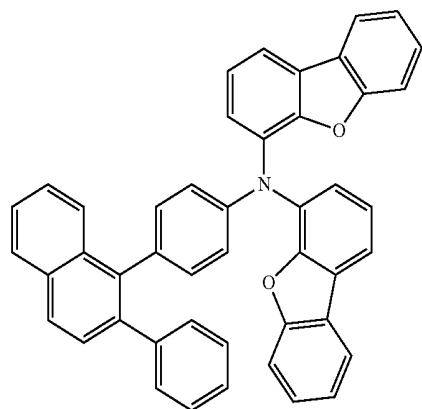


-continued

43

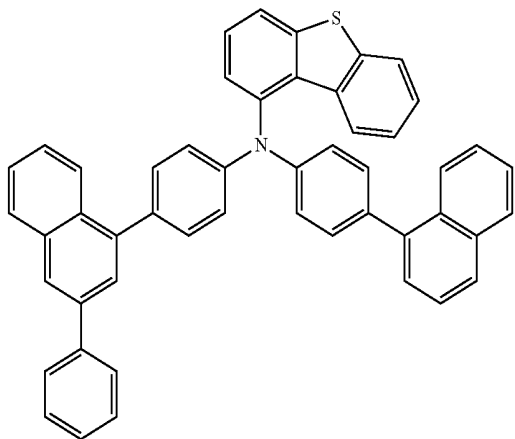


-continued


46

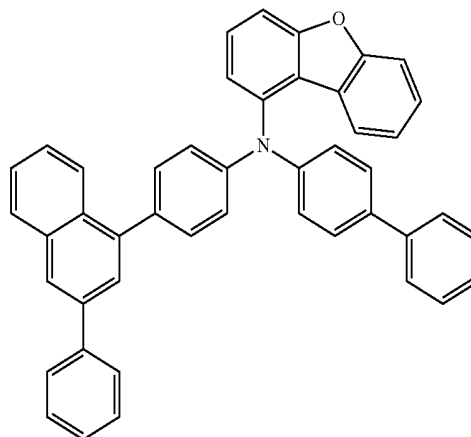


44

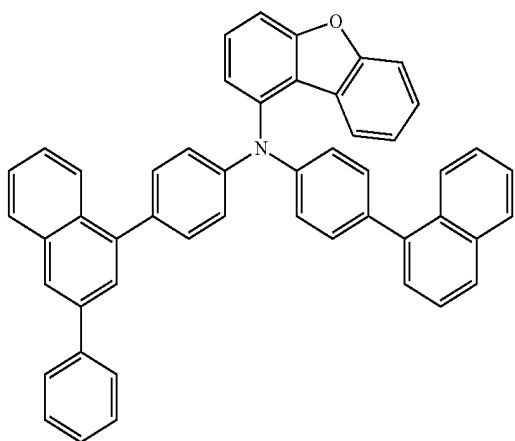


47

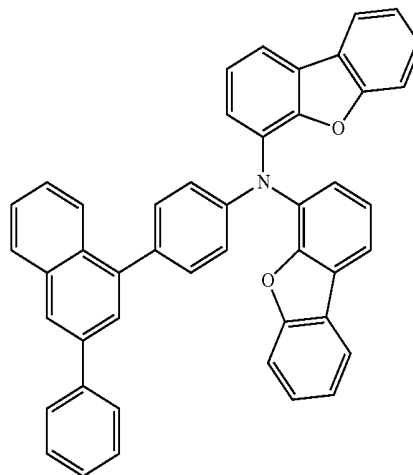

45

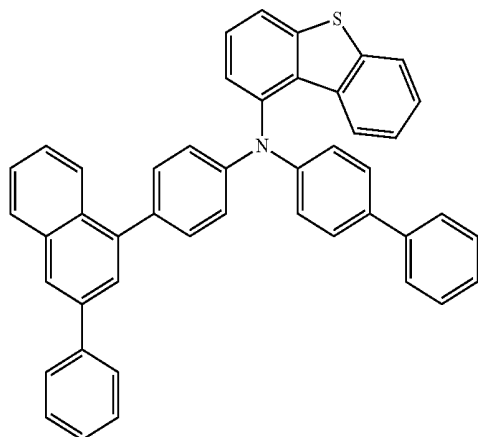


48

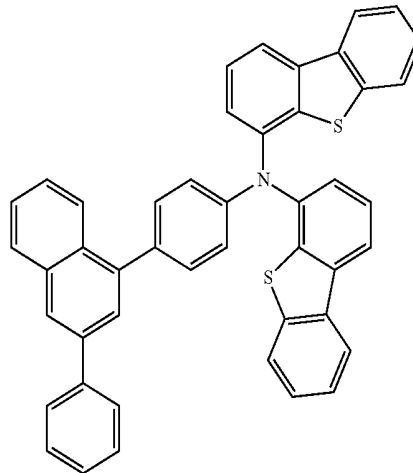


-continued

49

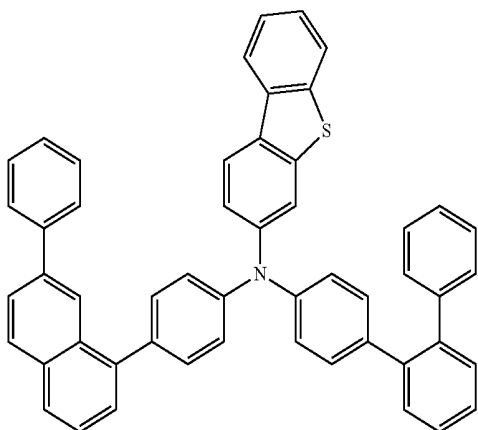


-continued


52

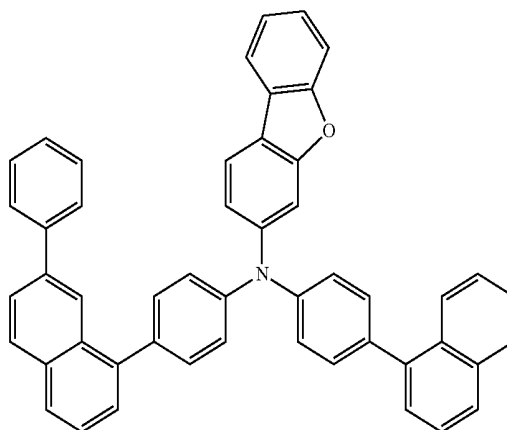


50

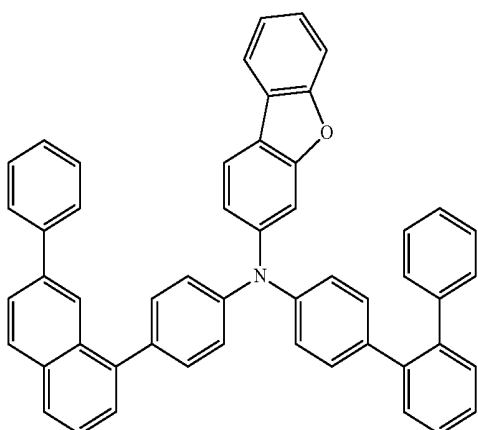


53

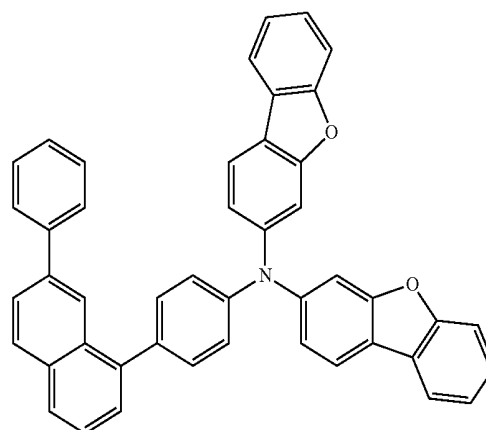

51

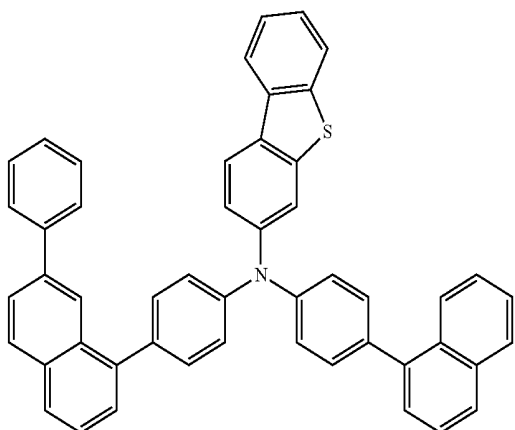


54

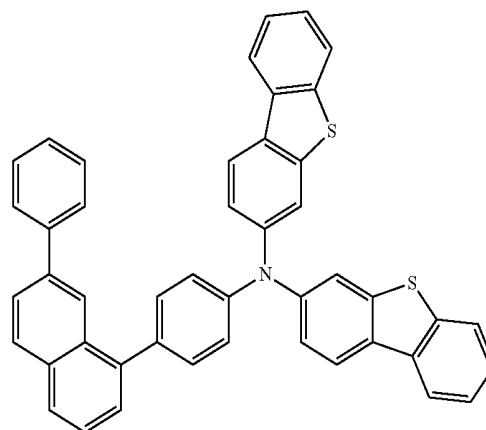

-continued


55

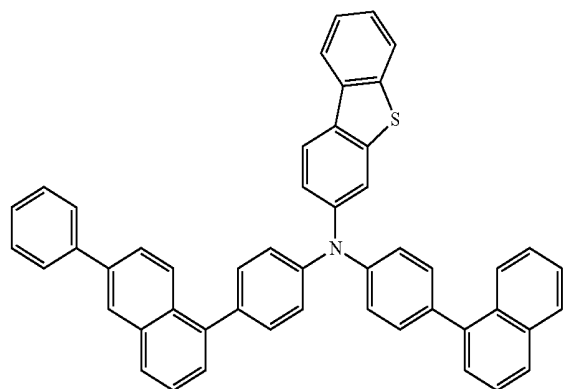


56

-continued


59

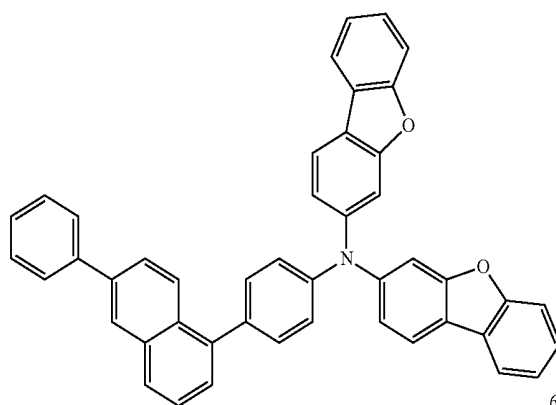


60

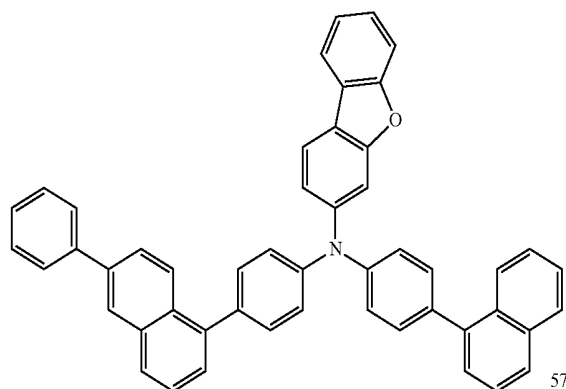


57

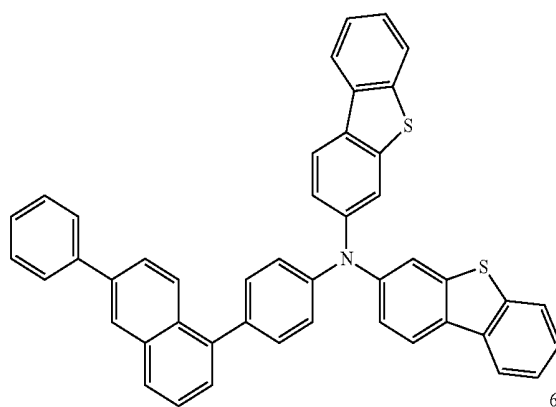



61

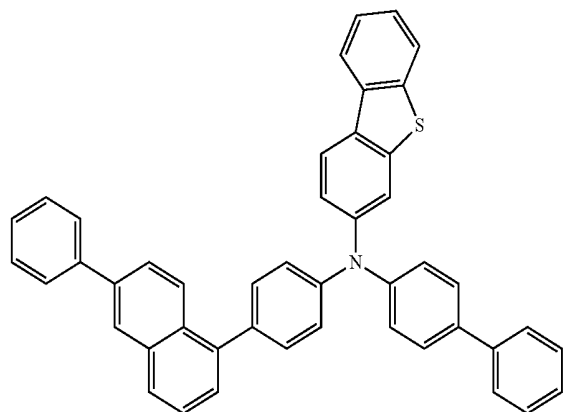

58

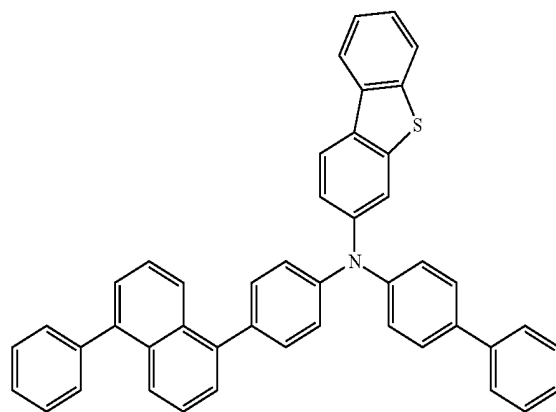


62

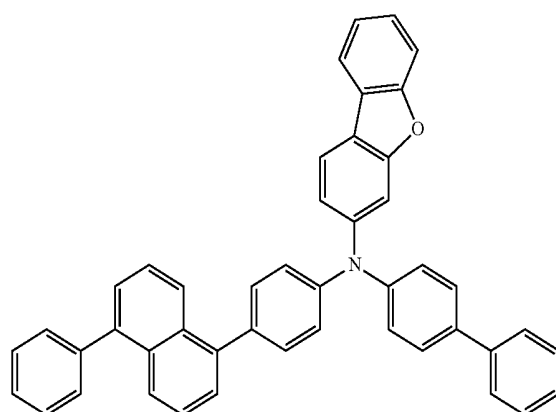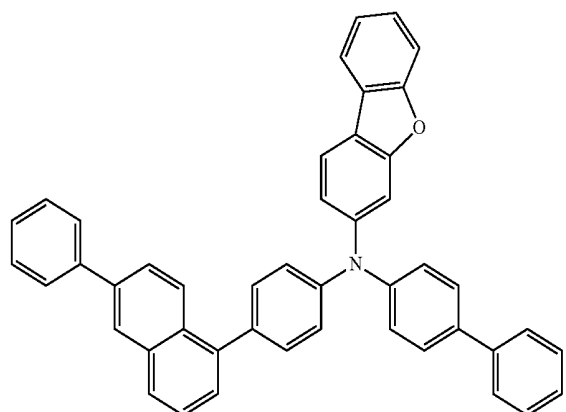

-continued


63

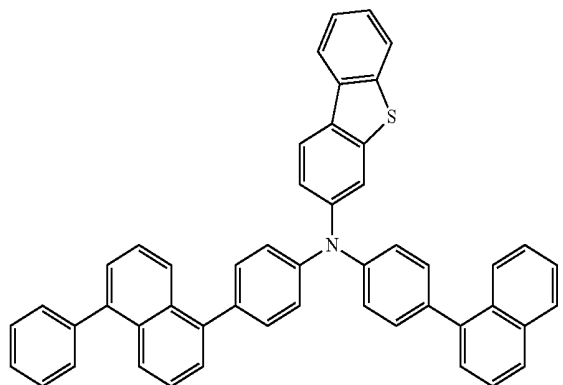


64

-continued


67

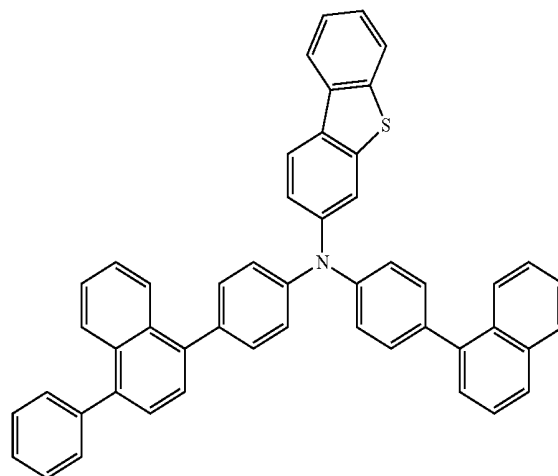


68

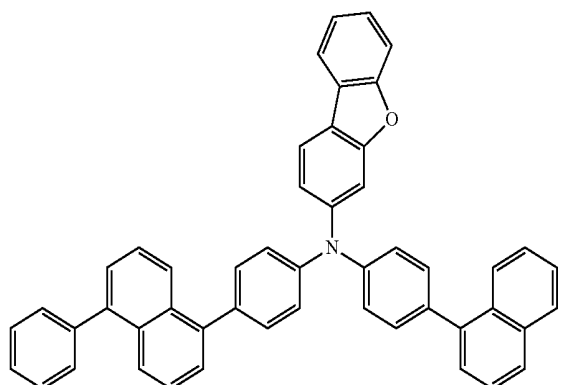



65

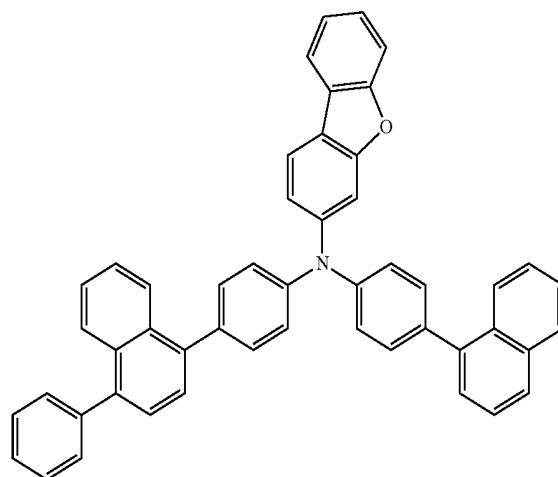

69

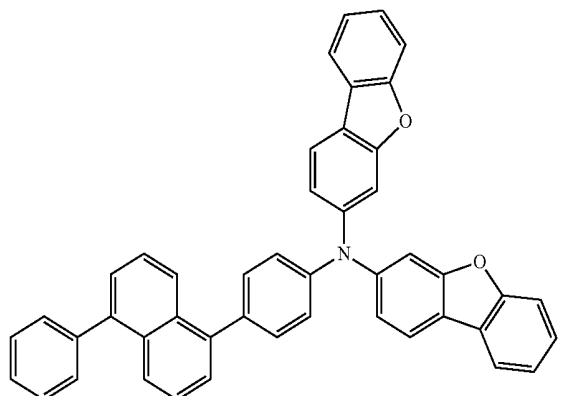


66

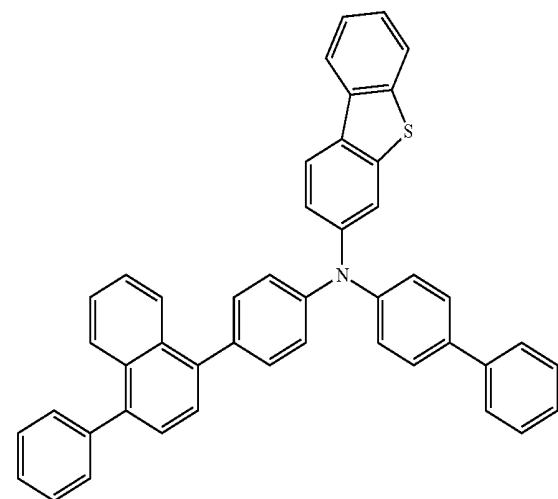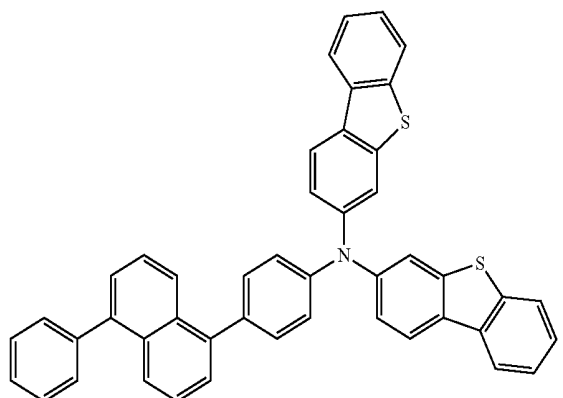


-continued


70

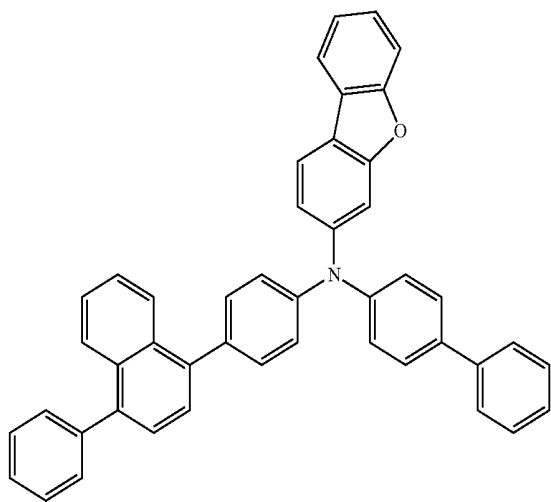

71

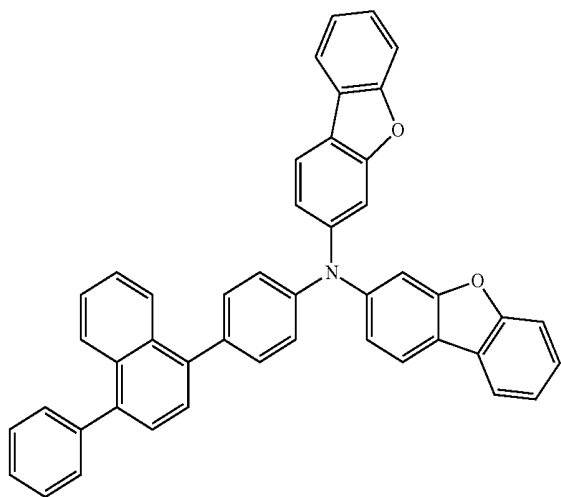


72

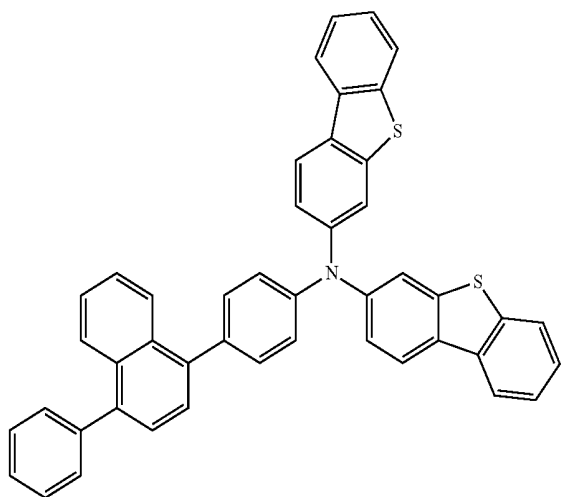


-continued


73

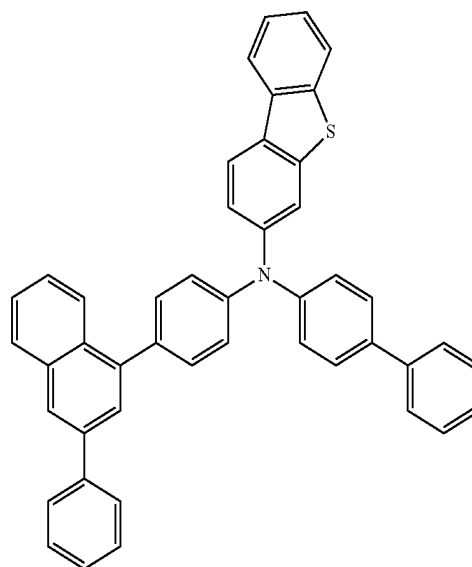

74

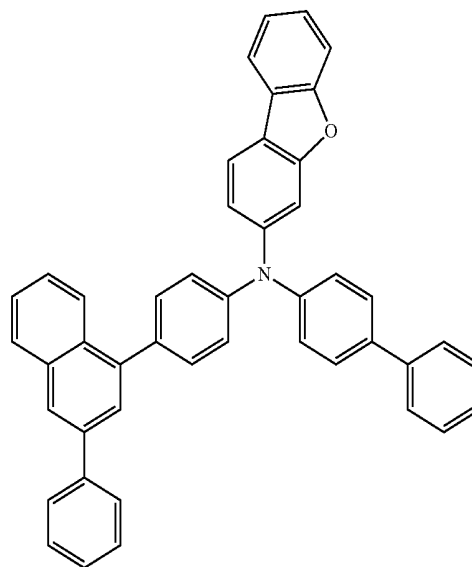


75

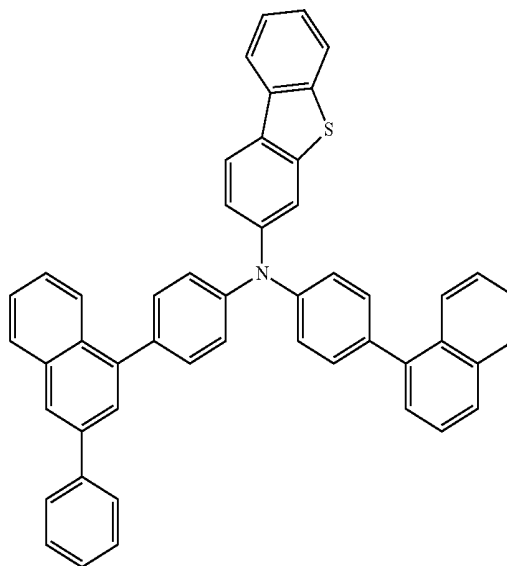


-continued

76

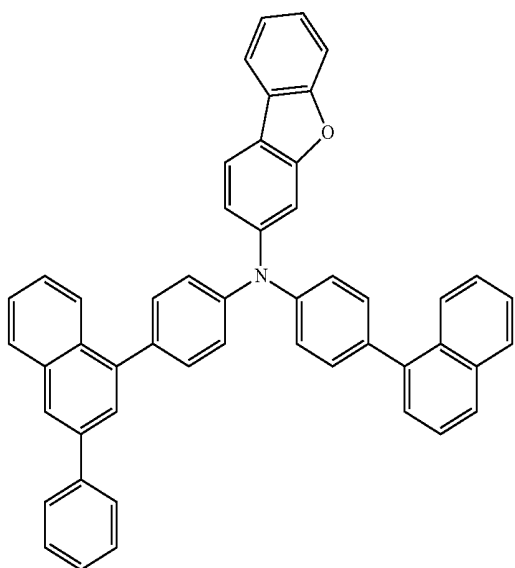



-continued

79

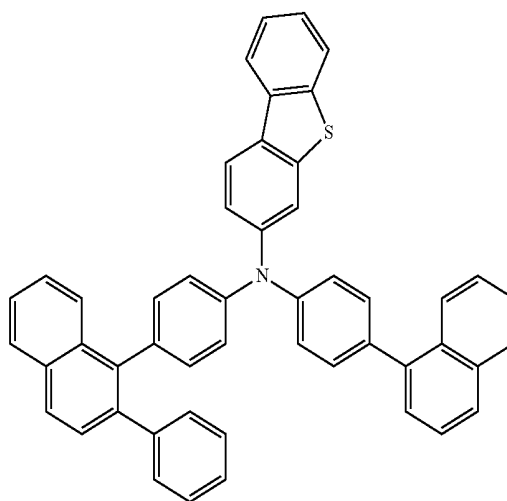


80


77

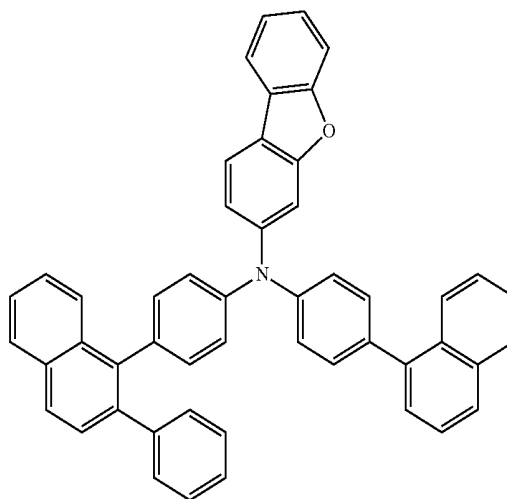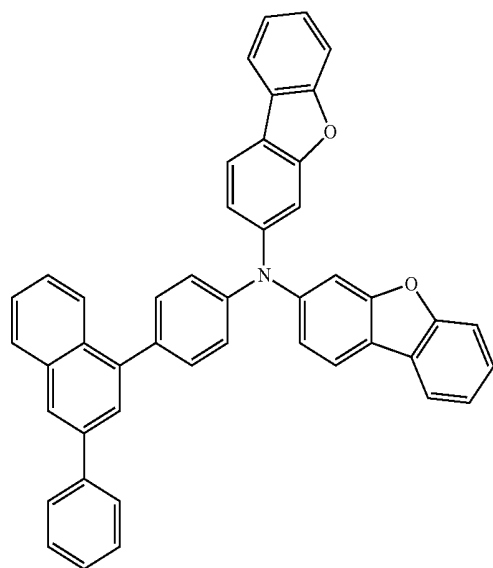


78

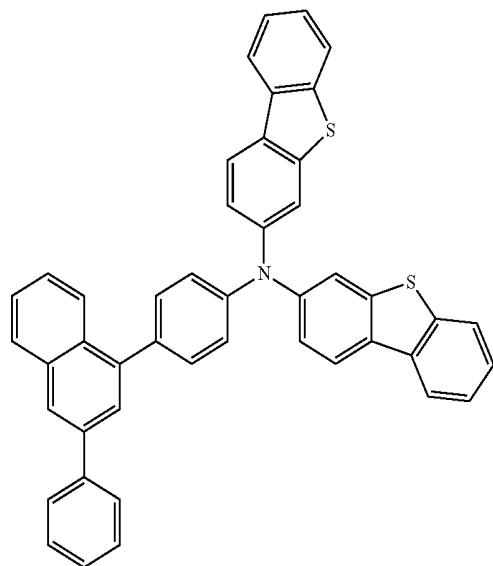


81

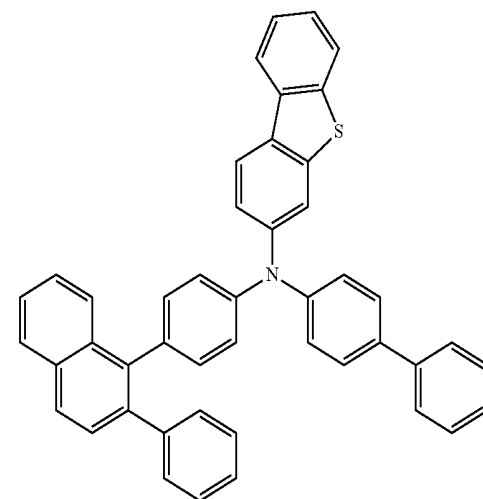

-continued

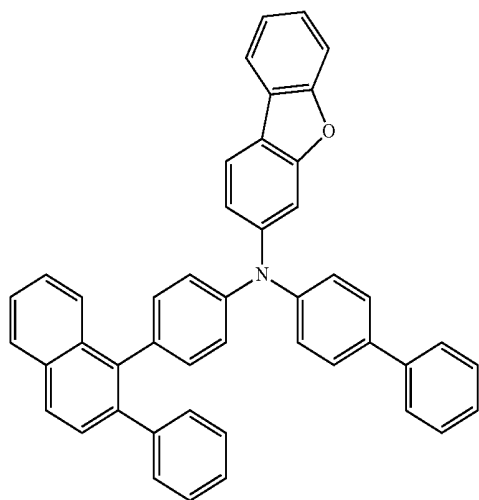


-continued

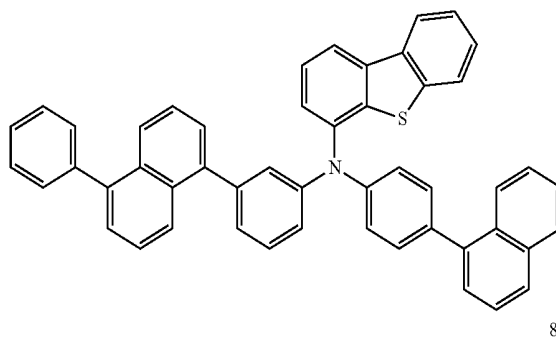


82

85


83

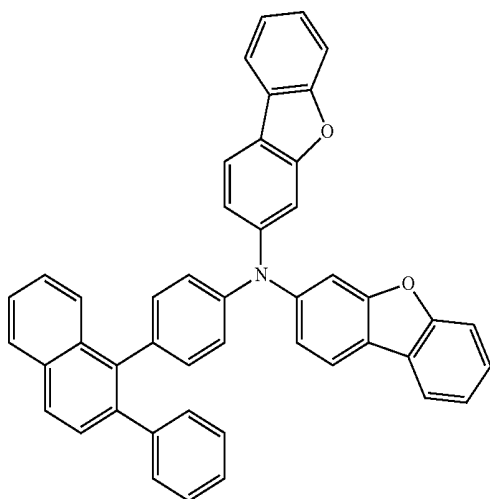

84

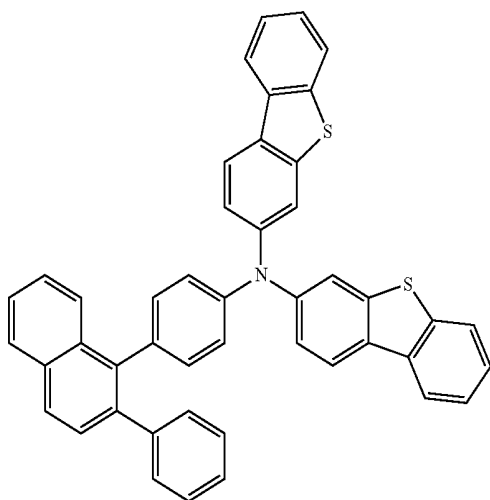


86

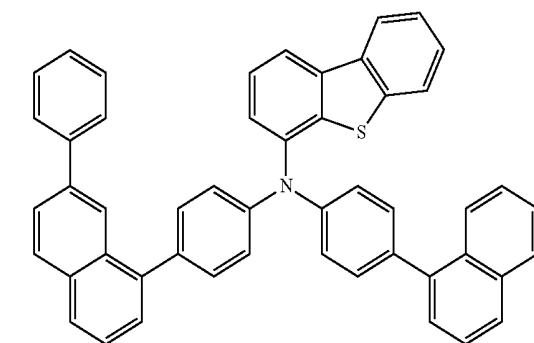


86

87

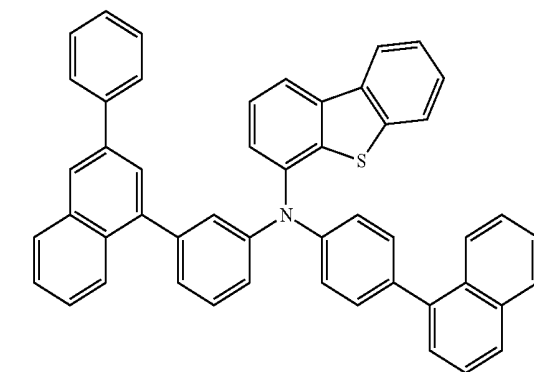


88

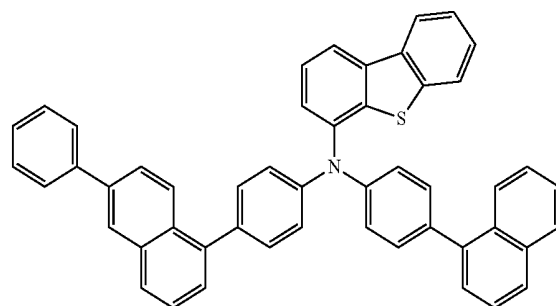


-continued


89

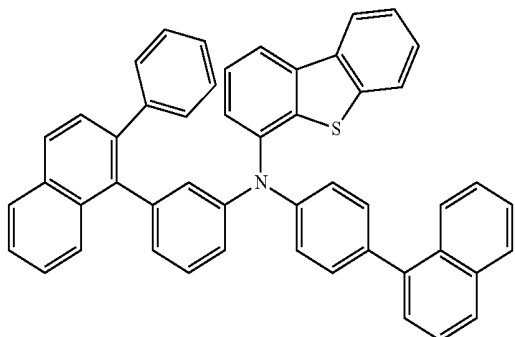


90

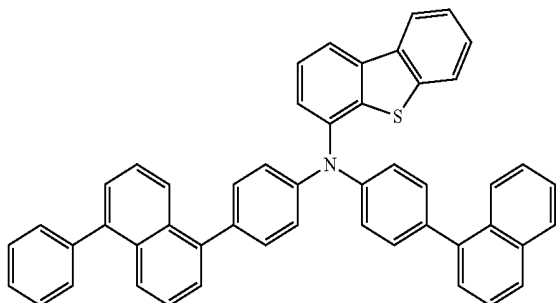

91

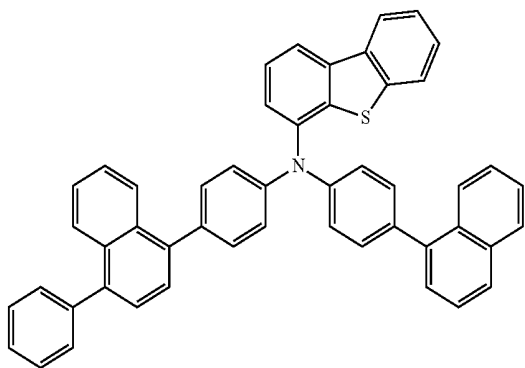


92

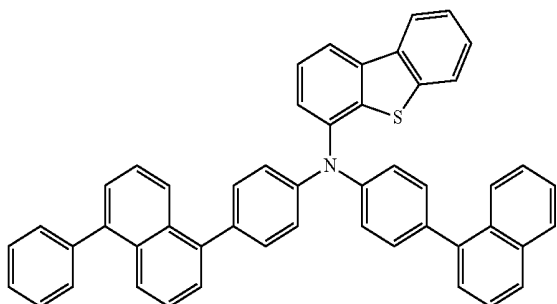


-continued


93

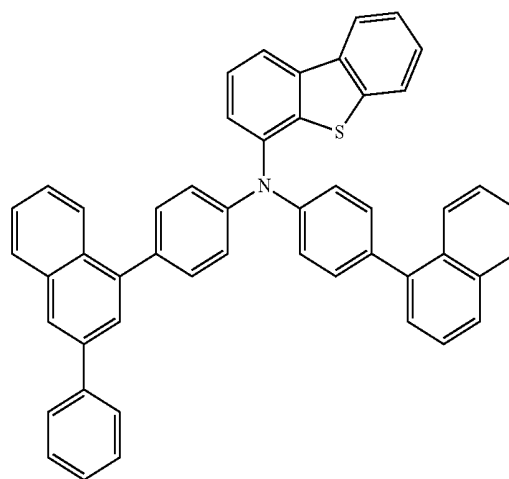


94

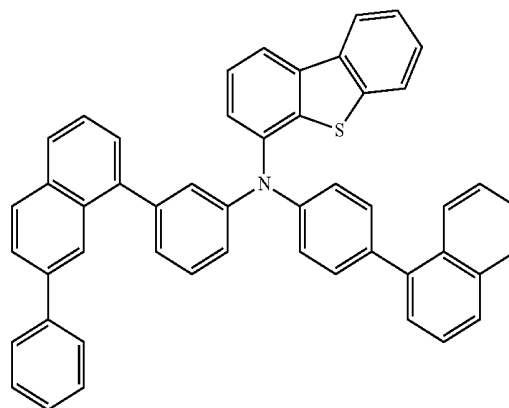

95

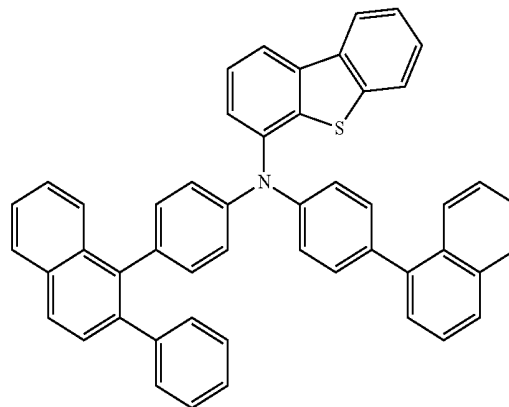


-continued

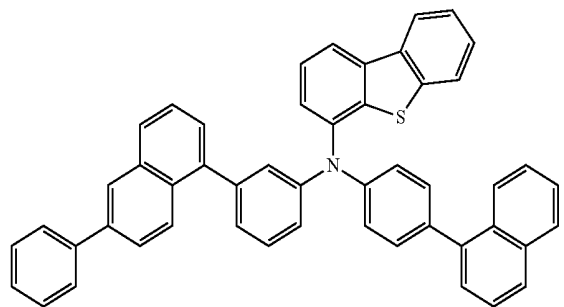


96


97

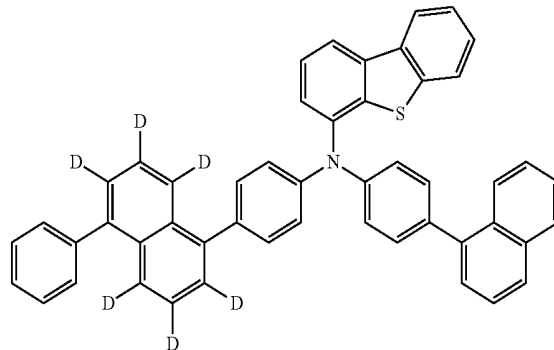


100

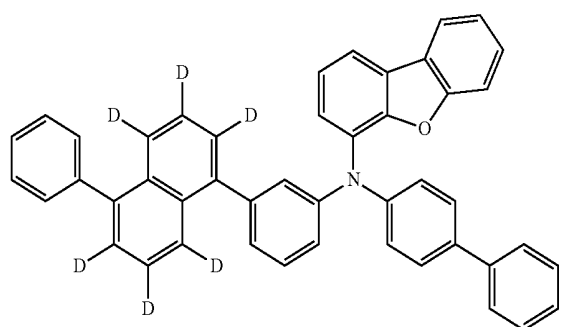


98

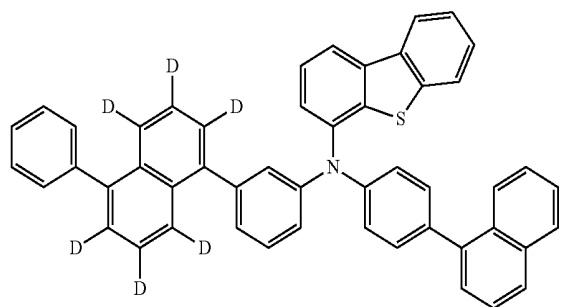


99

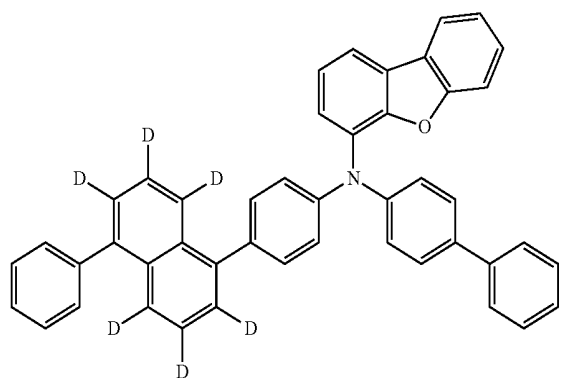


-continued

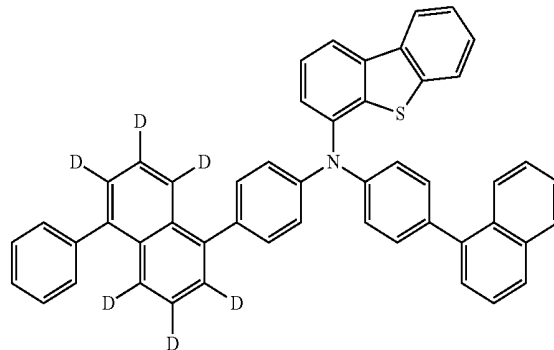

101

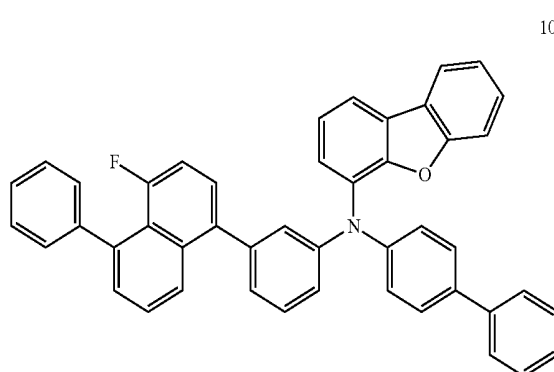


102

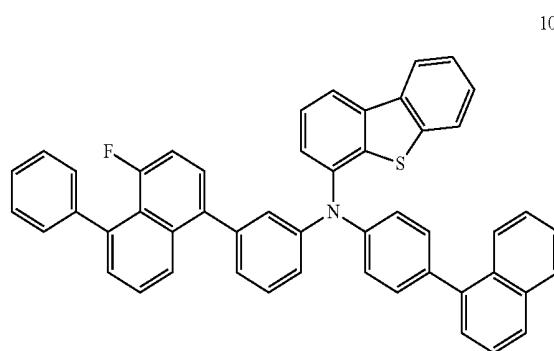


103

-continued


104

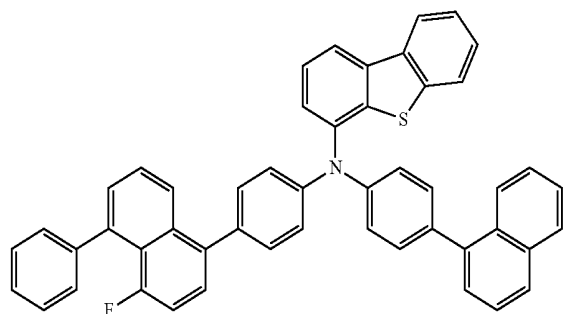


105

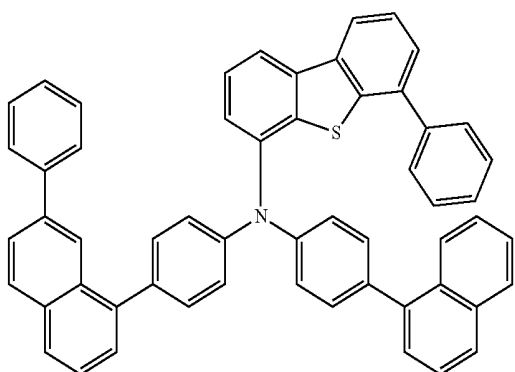

106

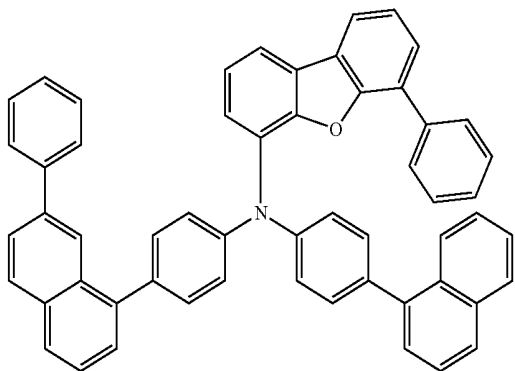


107

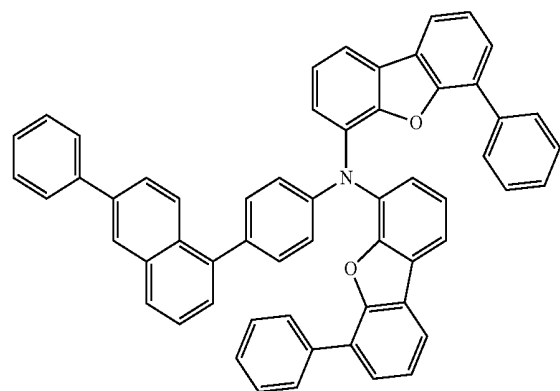


-continued


108

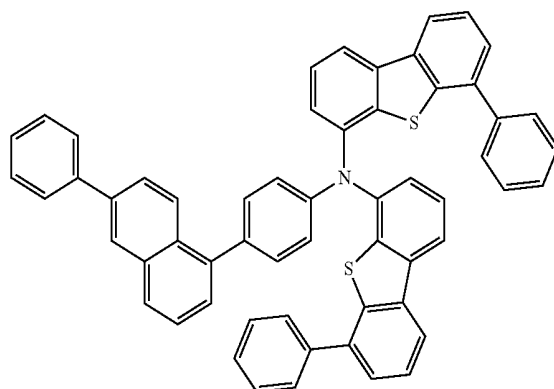


109

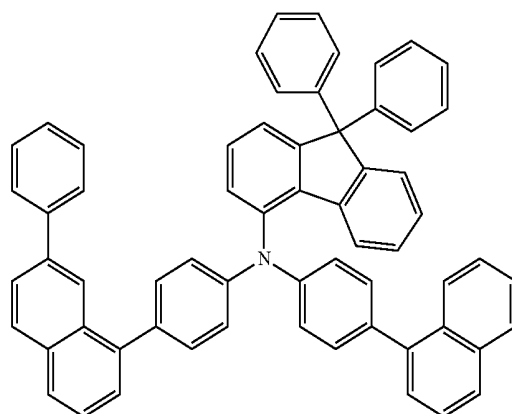

110

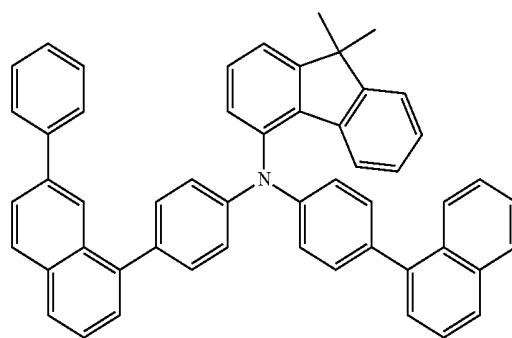


111

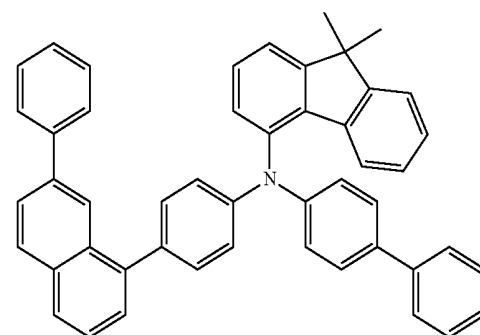


-continued


112

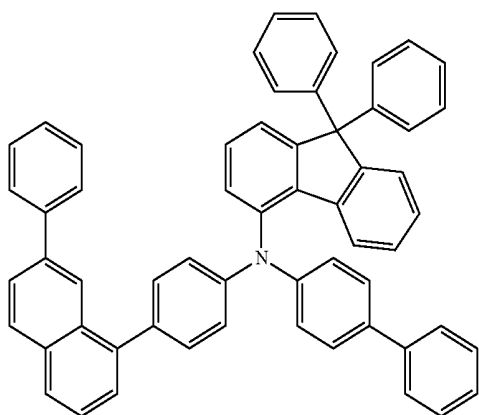


113

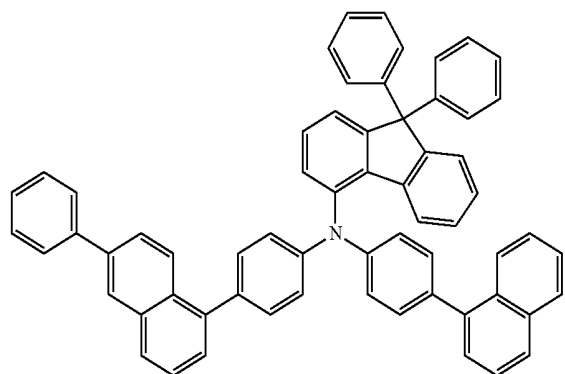

114

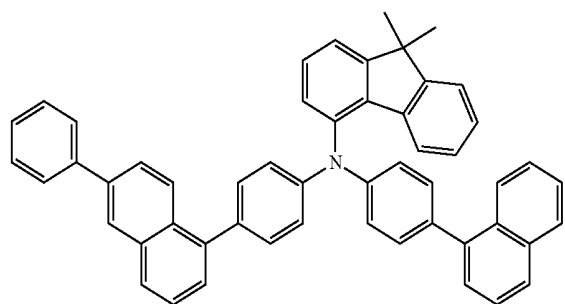


115

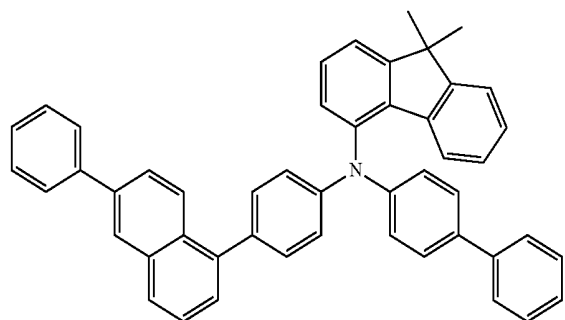


-continued


116

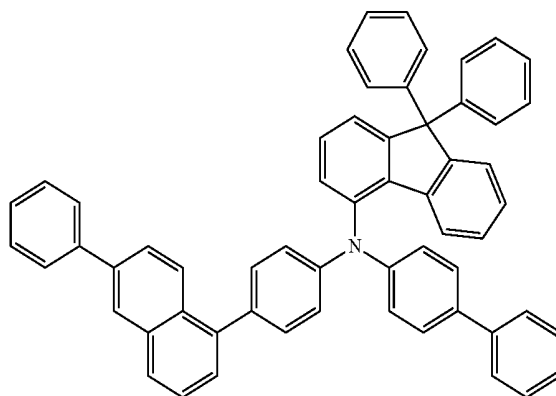


117

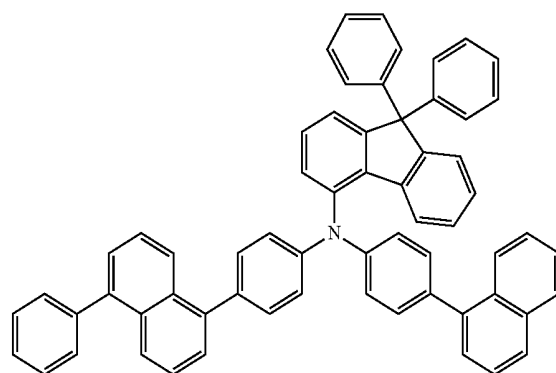

118

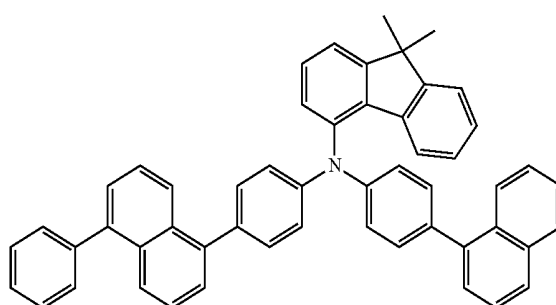


119

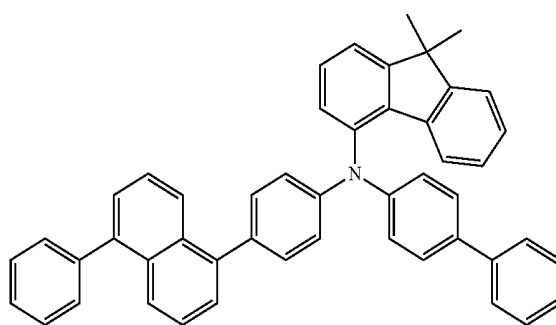

-continued


120

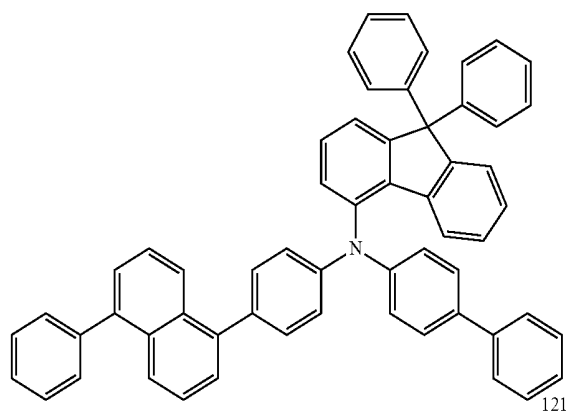


121

-continued


124

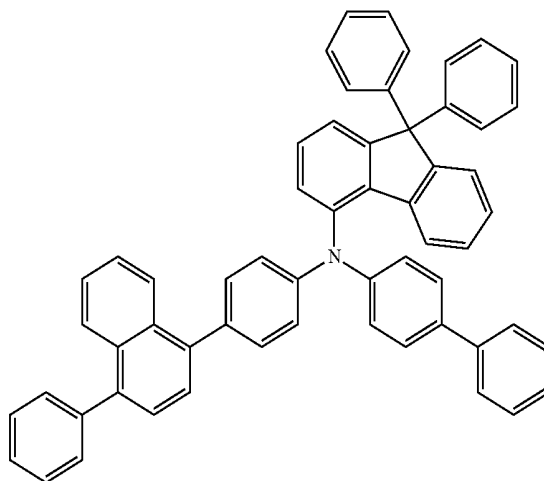


125

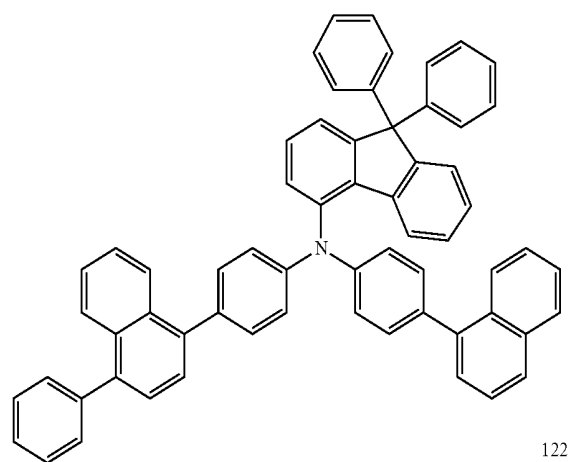



122

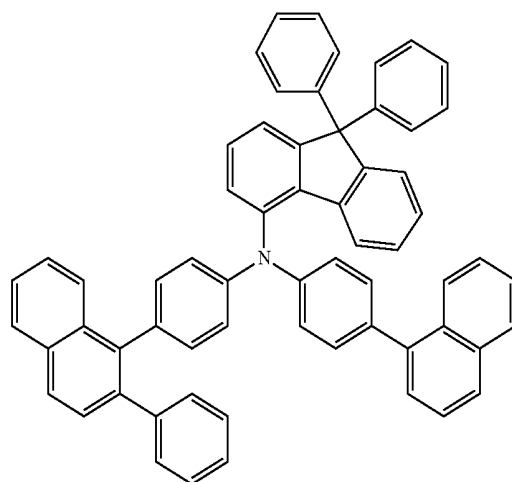

126

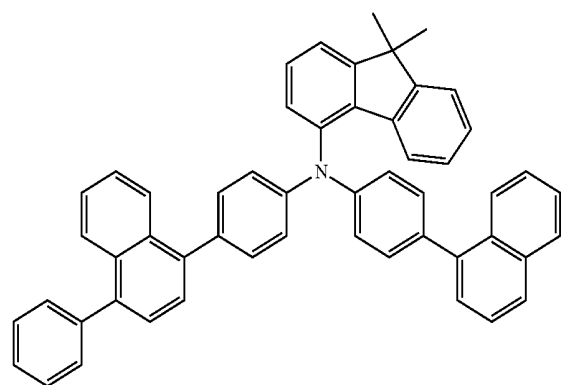


123

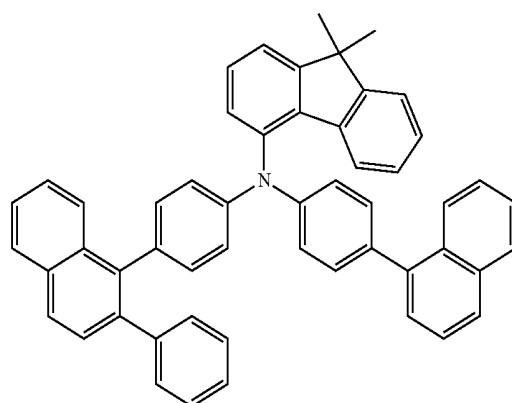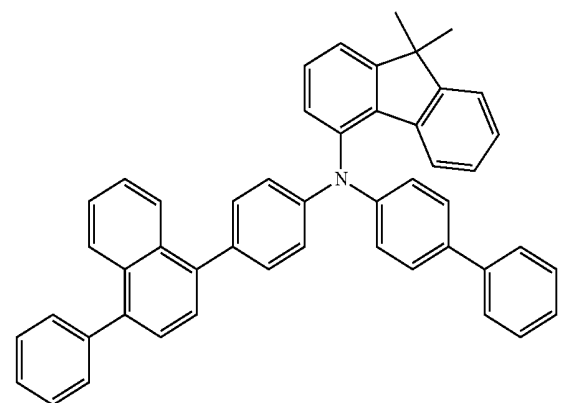


-continued

127

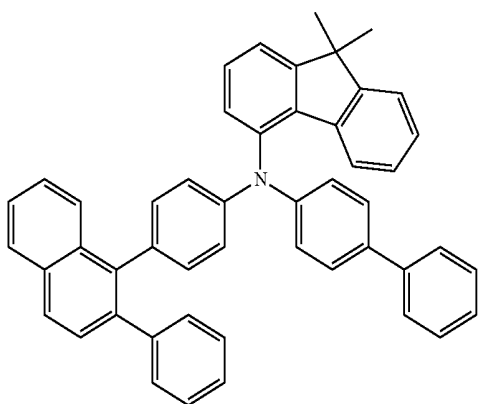


-continued


130

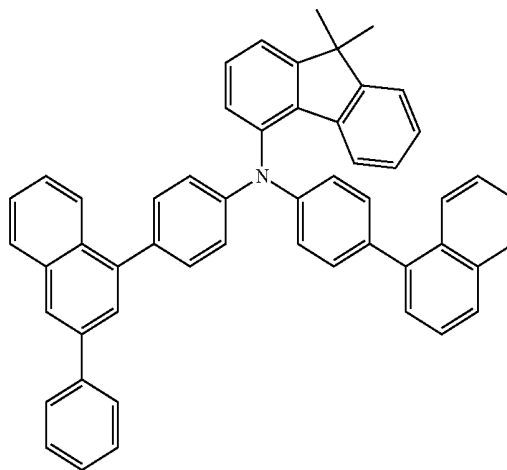


128

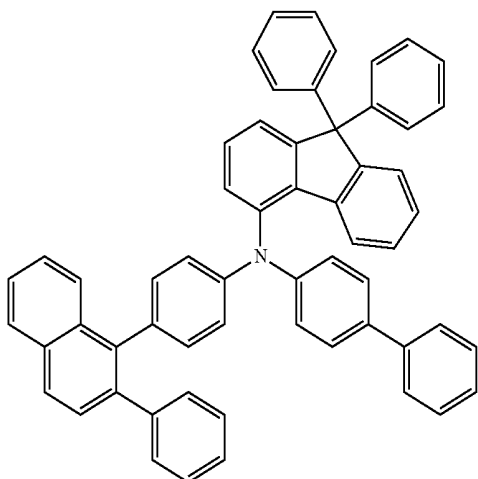


131

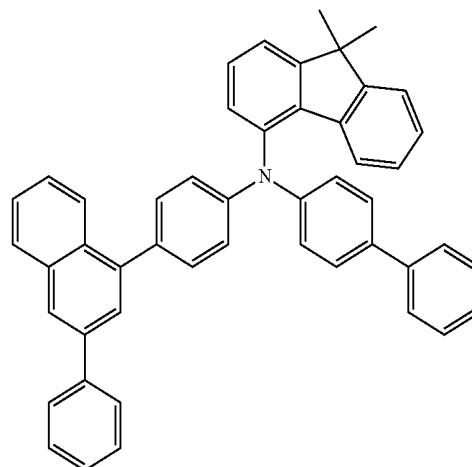

129

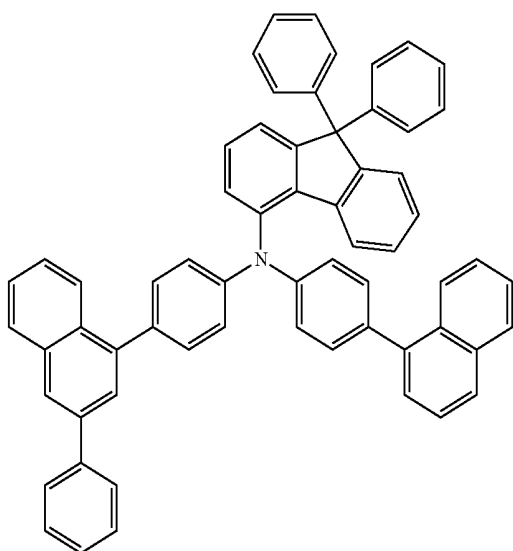


132

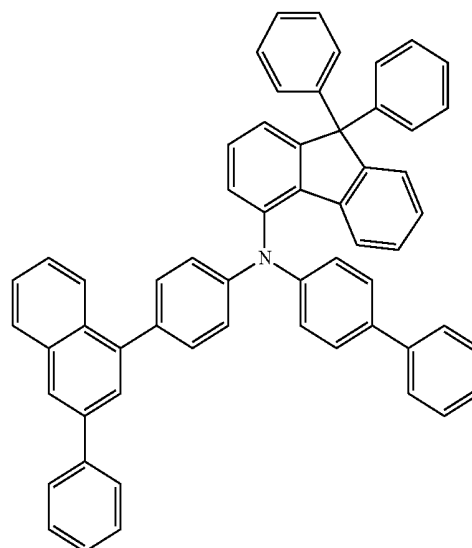

-continued


133

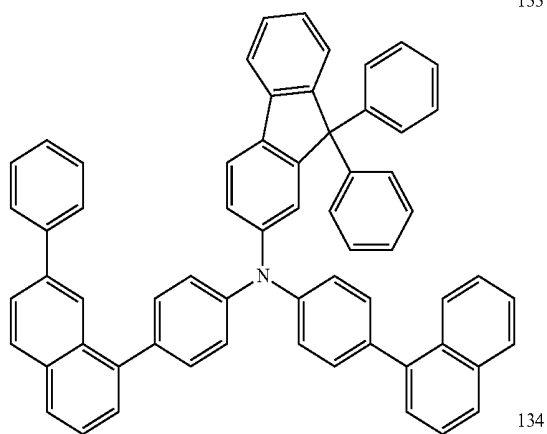


134

-continued


137

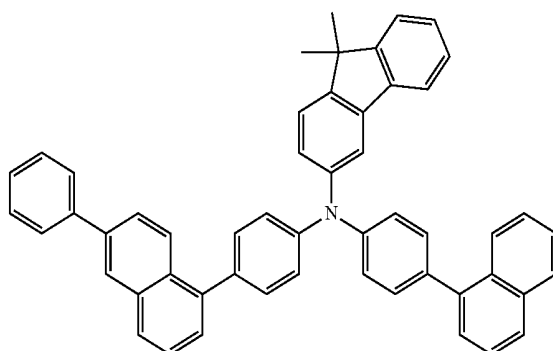


138

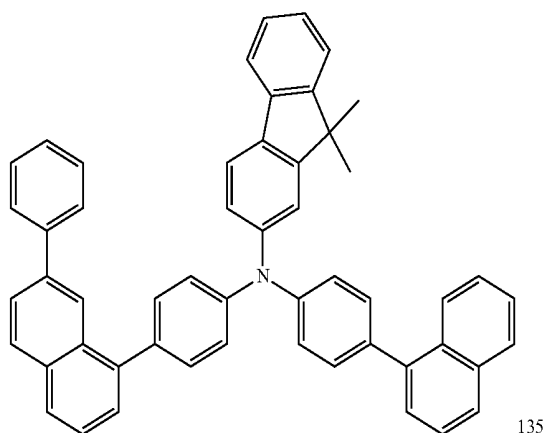


135

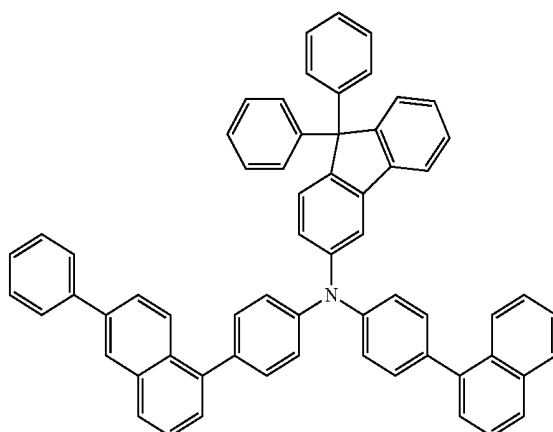



139

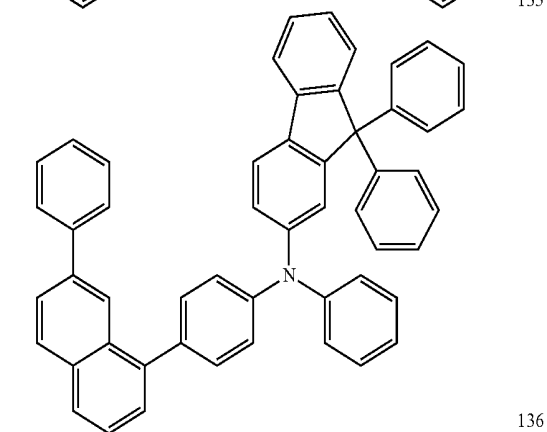

136

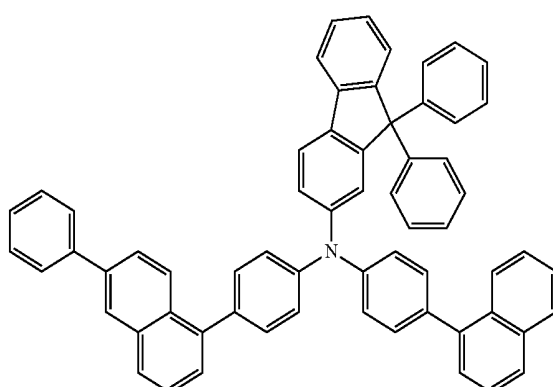


140

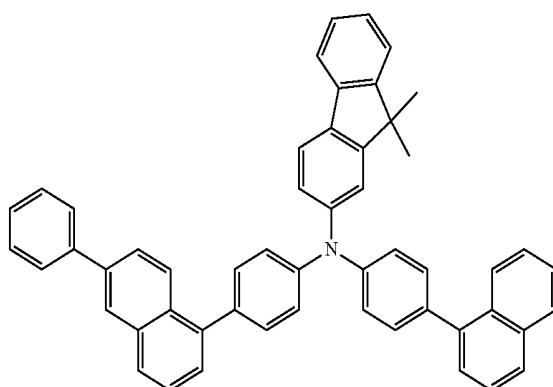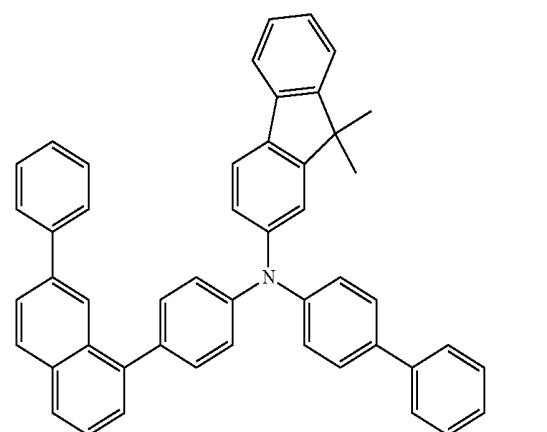


-continued

141

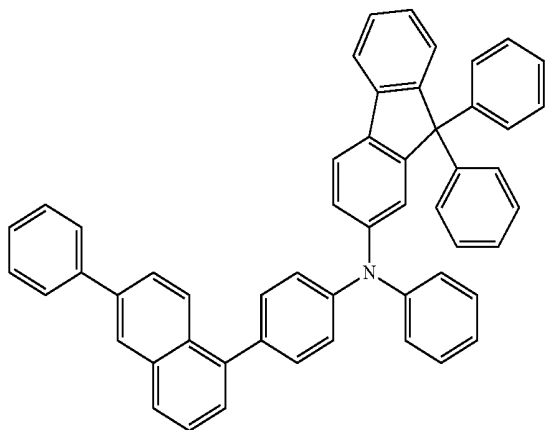


-continued

144

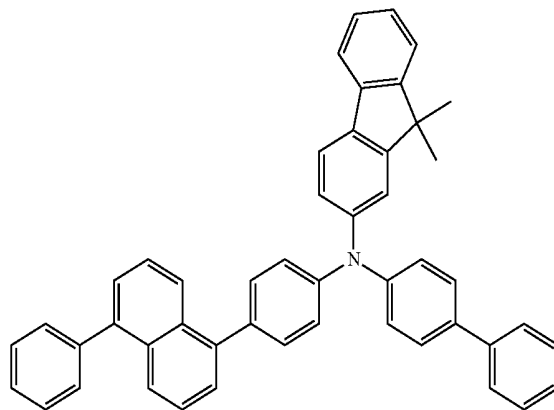


145

142

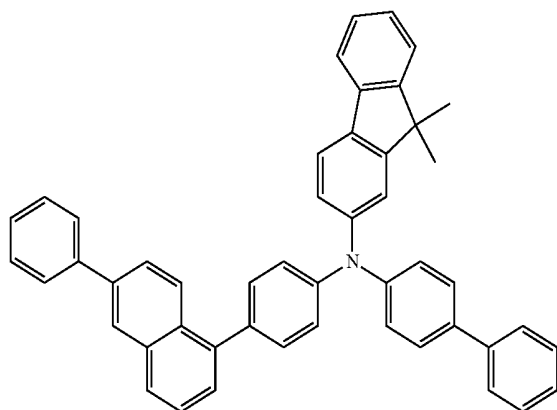


143


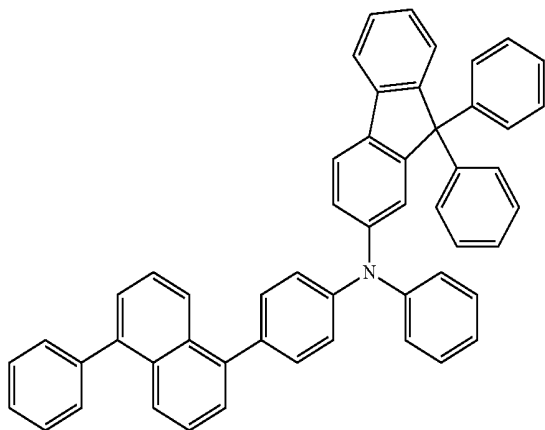


-continued

146

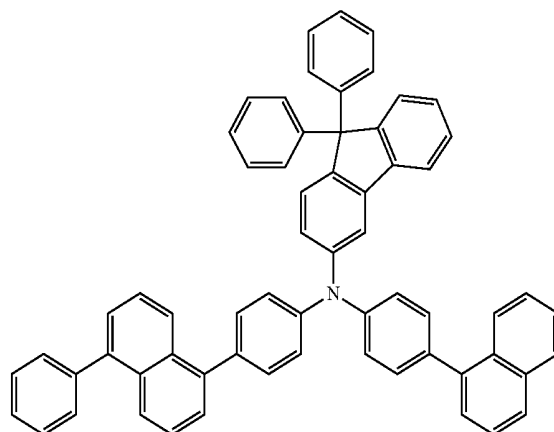


147

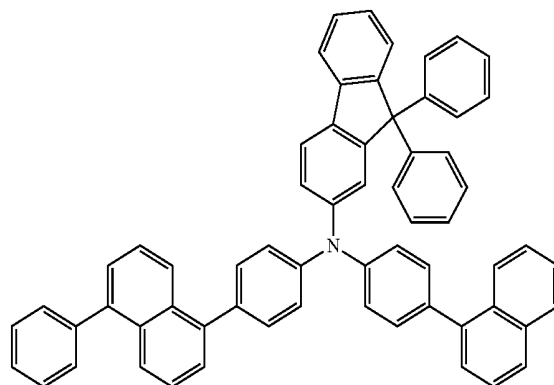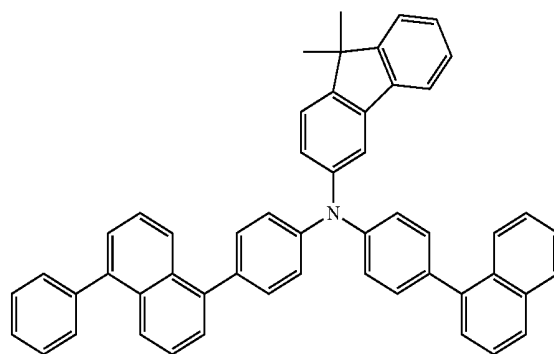


-continued


154

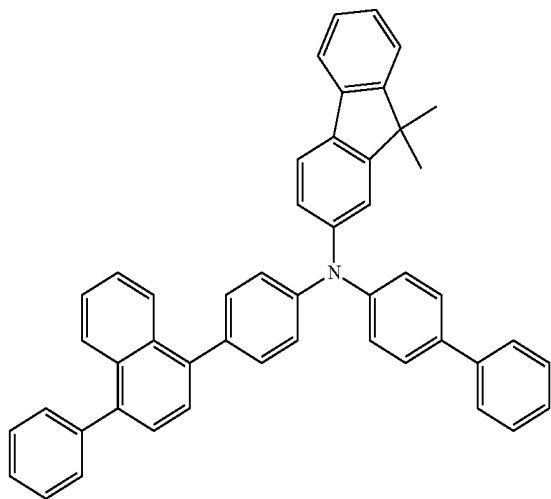

155

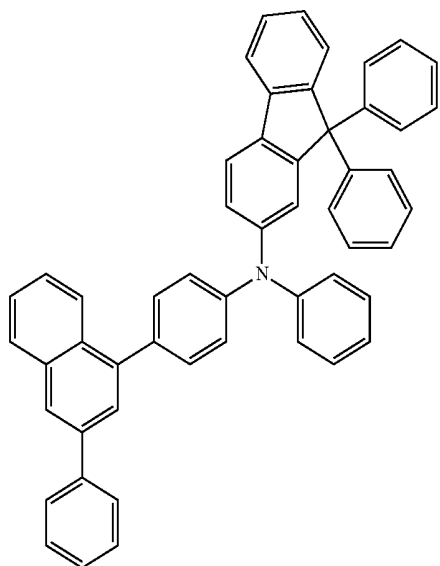


156

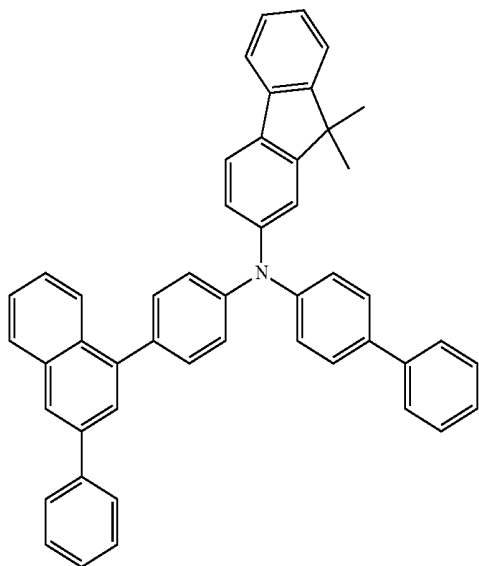


-continued


157

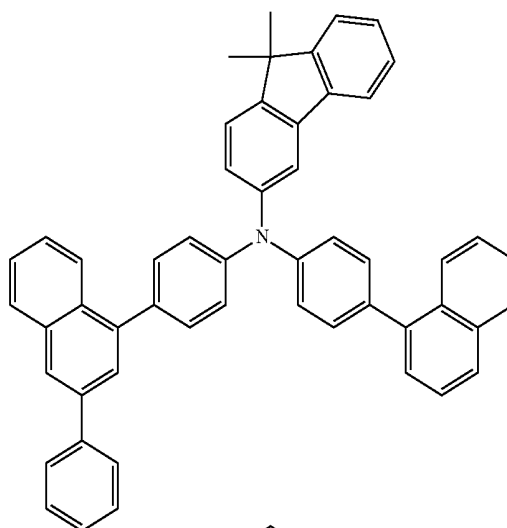

158

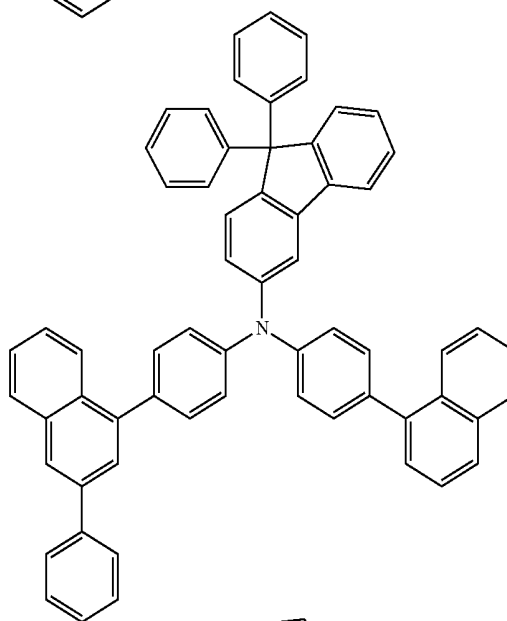


159

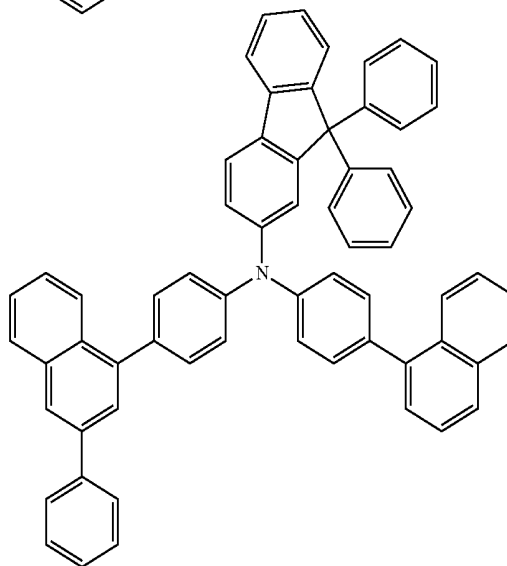


-continued

160

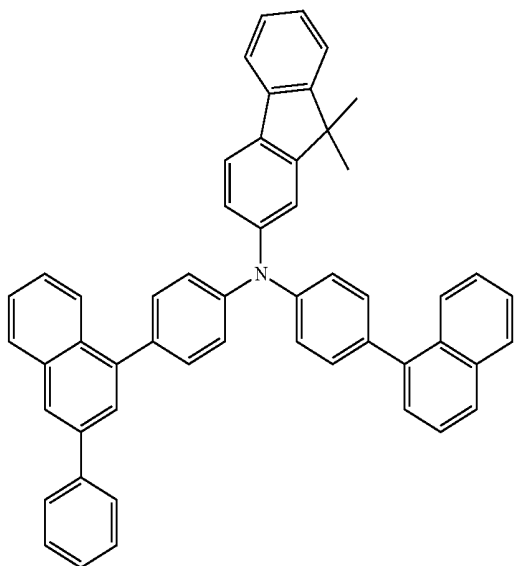


-continued


163

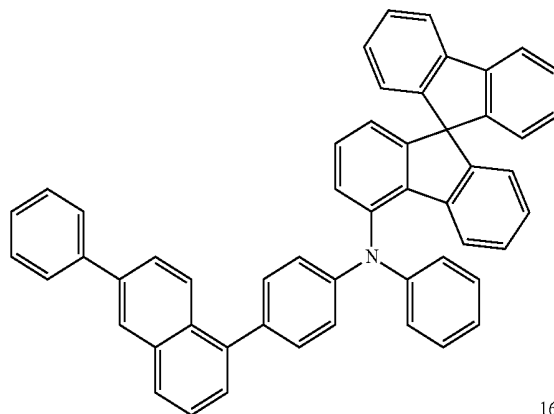


164

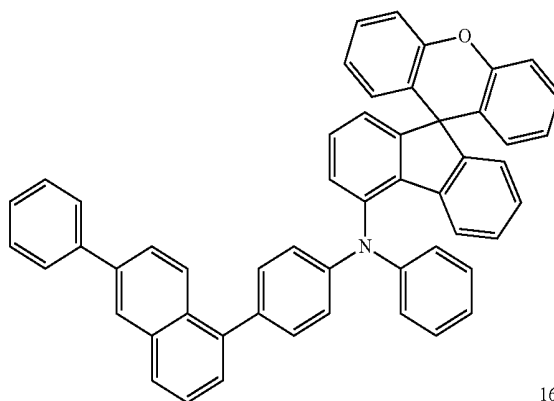


161

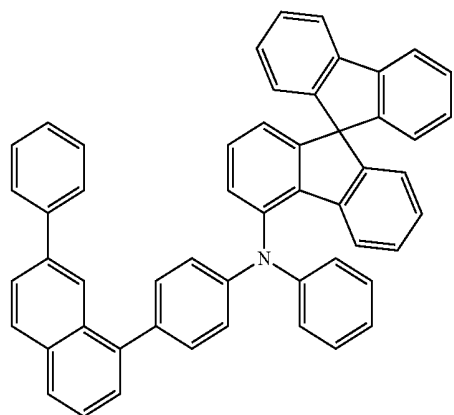


165

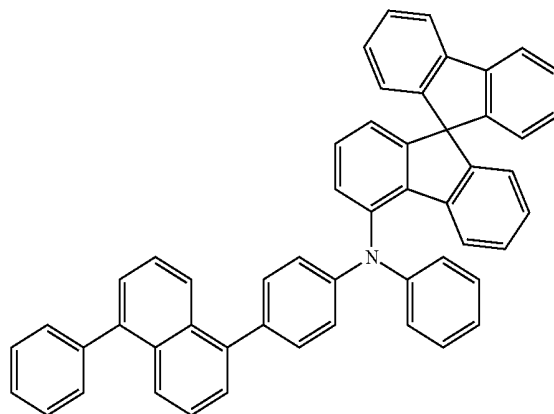

162

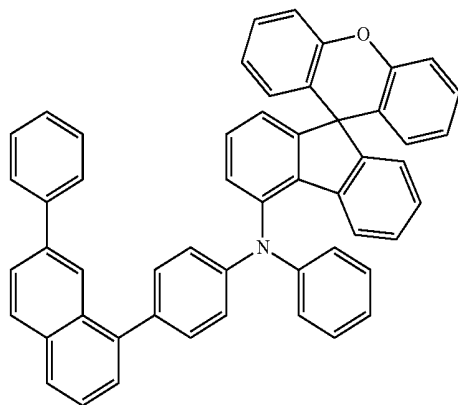


166

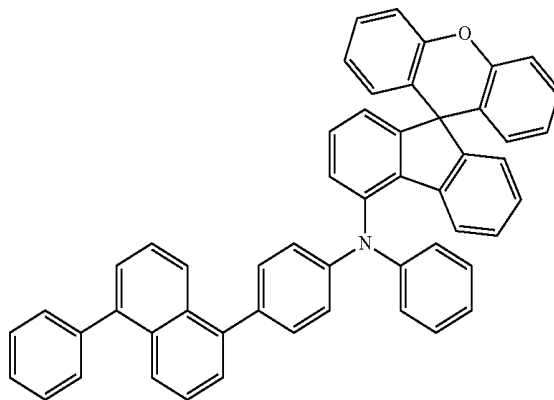


-continued


167

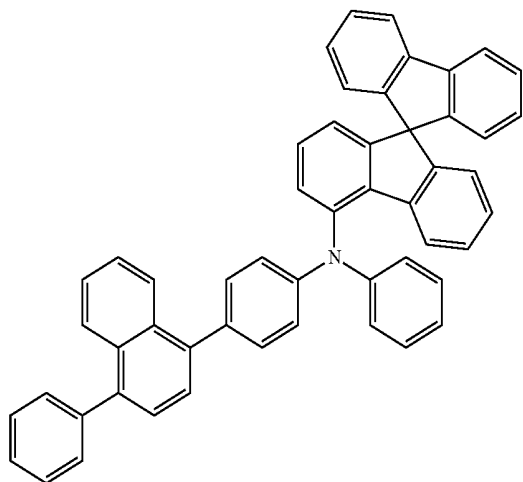

168

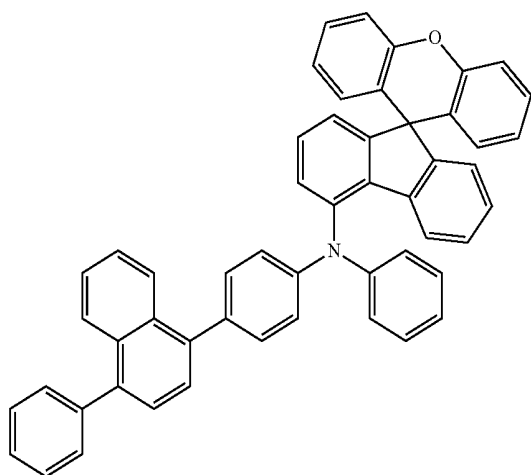


169

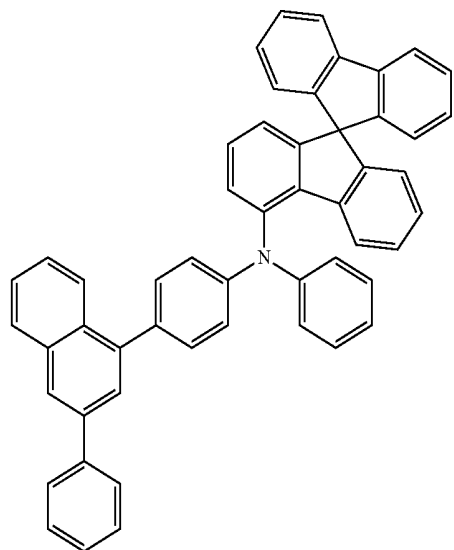


-continued


170

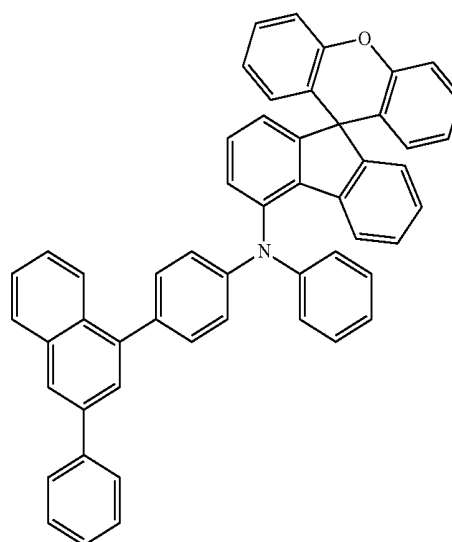


171

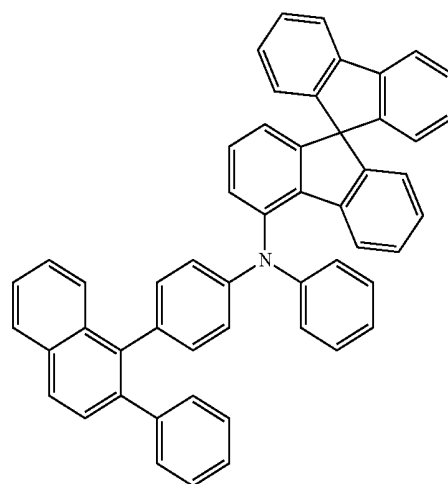

172

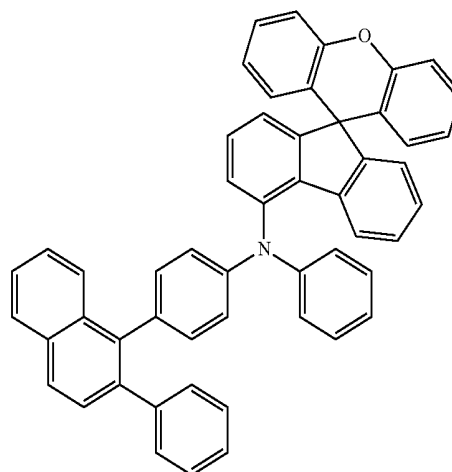


-continued

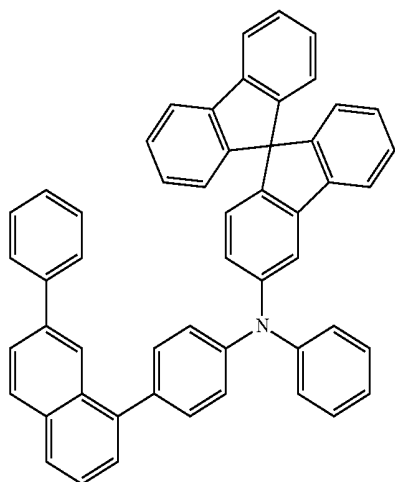


173

-continued

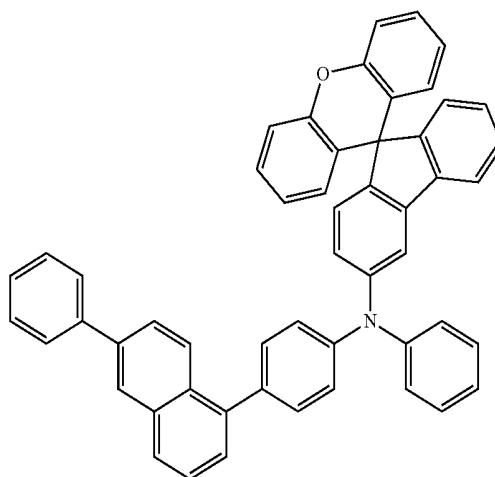


176


174

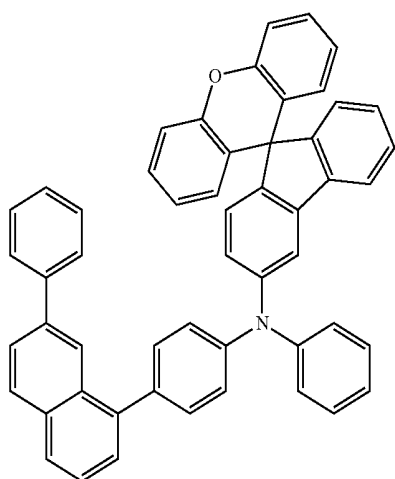


177

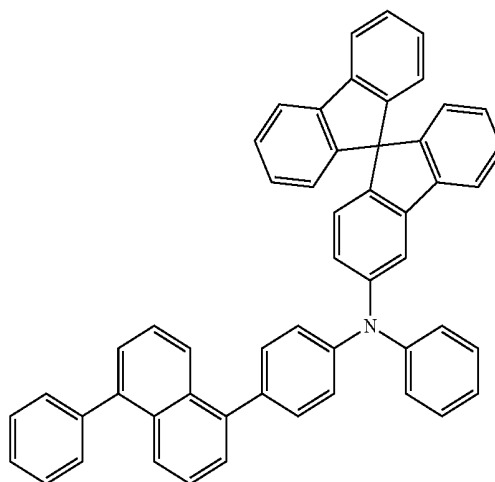


175

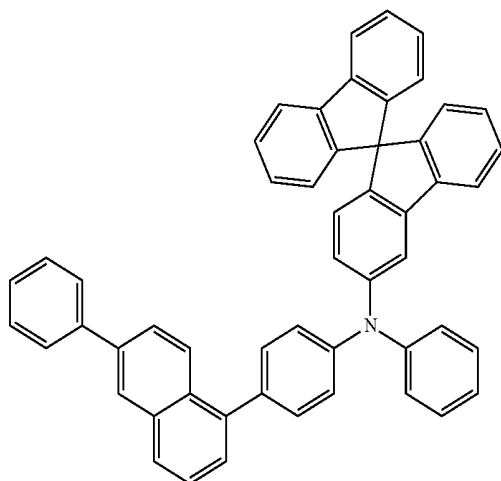

178

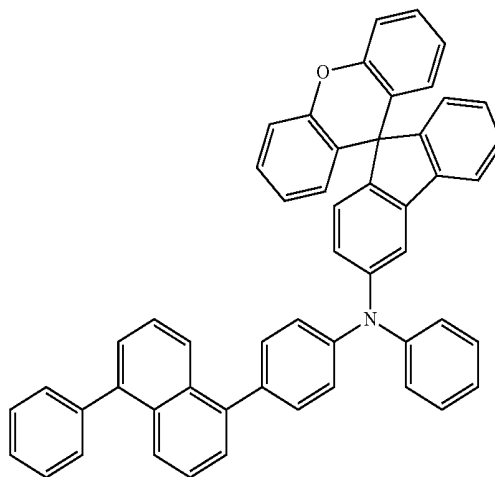


-continued

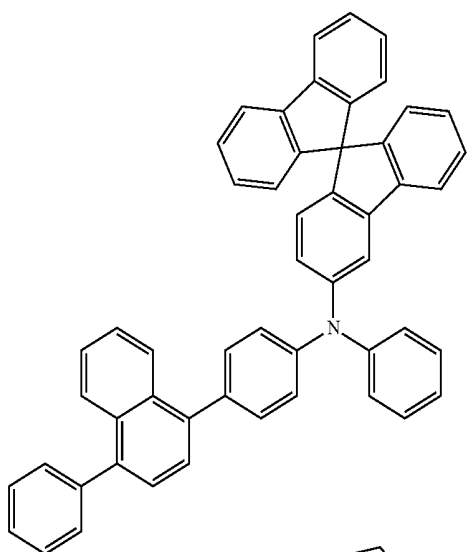


179


-continued

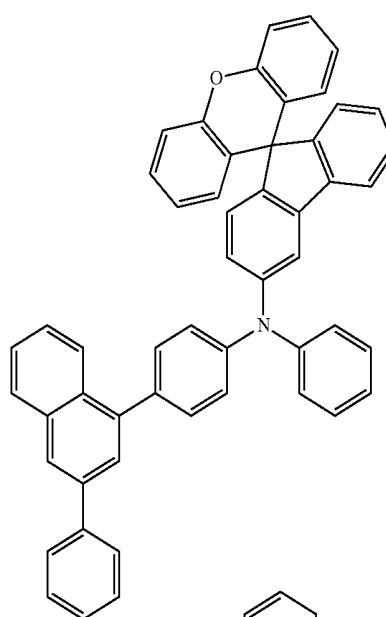


182

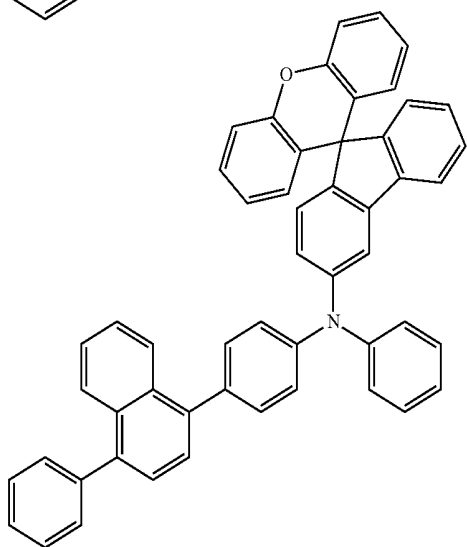


180

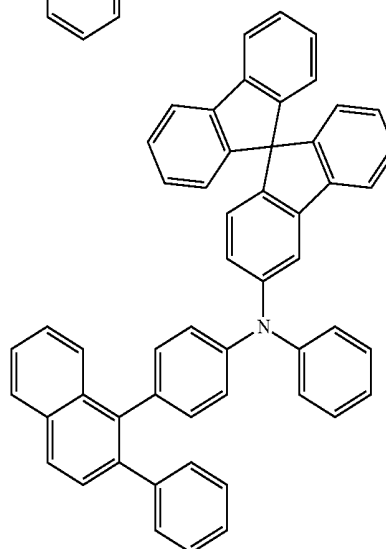

183

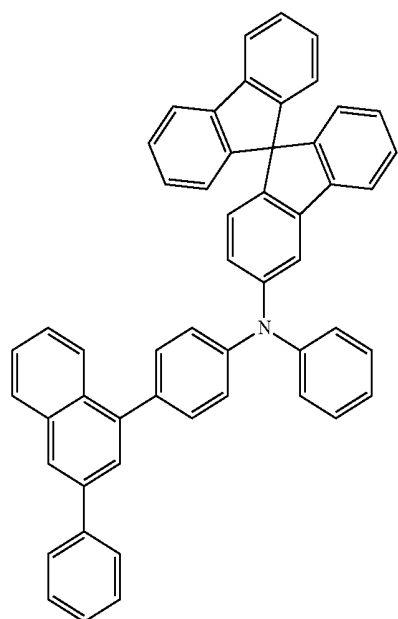


181

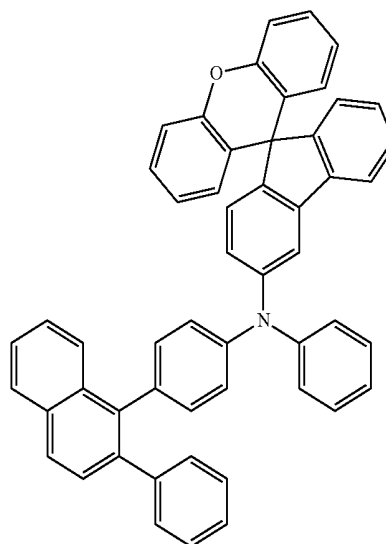

184


-continued

185

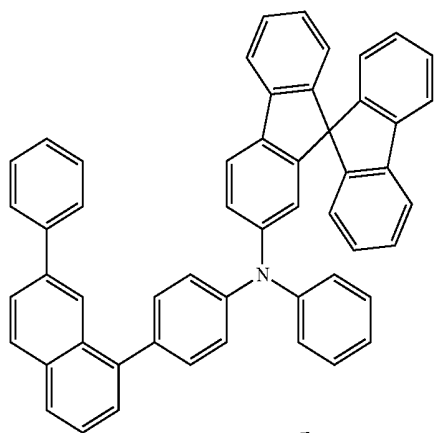


-continued

189


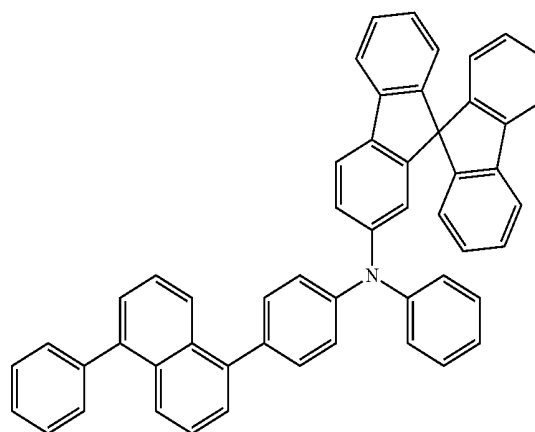


186

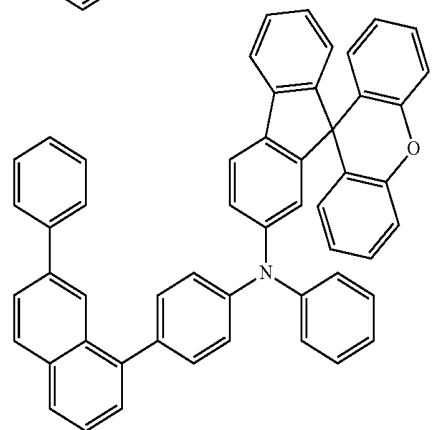



187

190

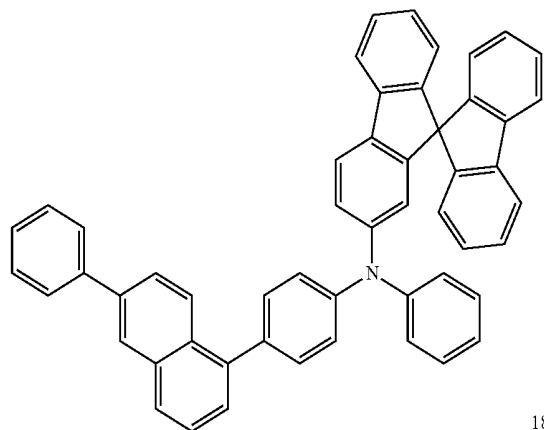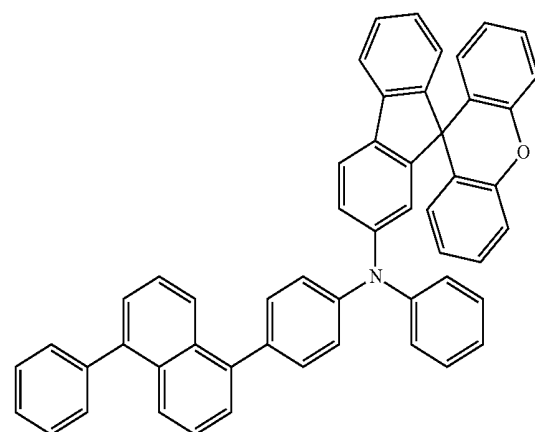


188


191

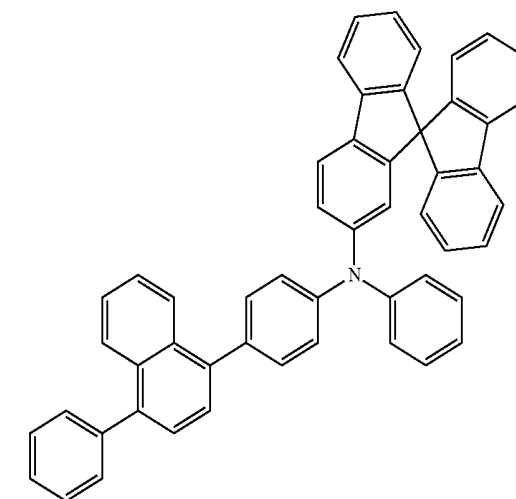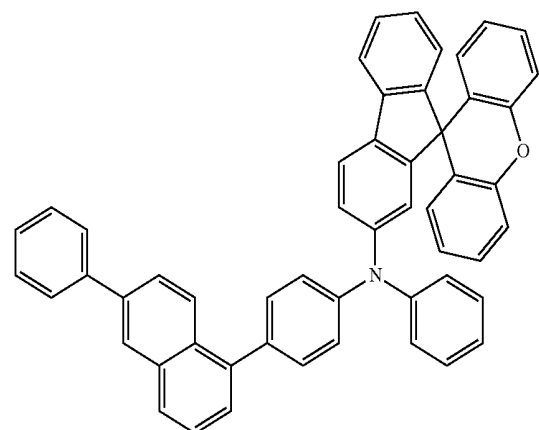


-continued

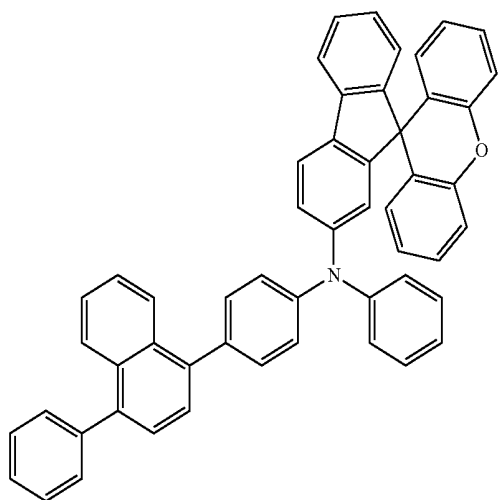


-continued

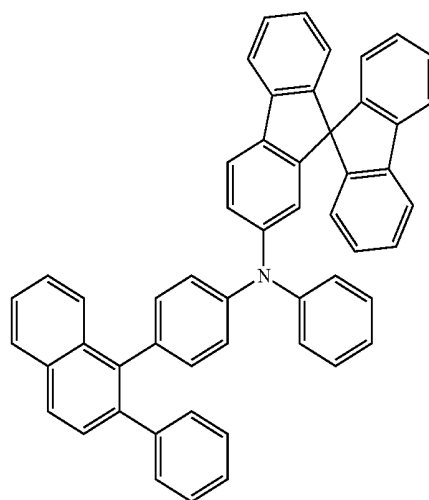


193

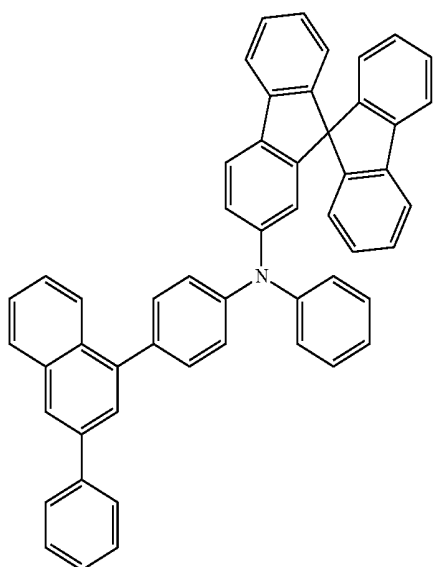


196

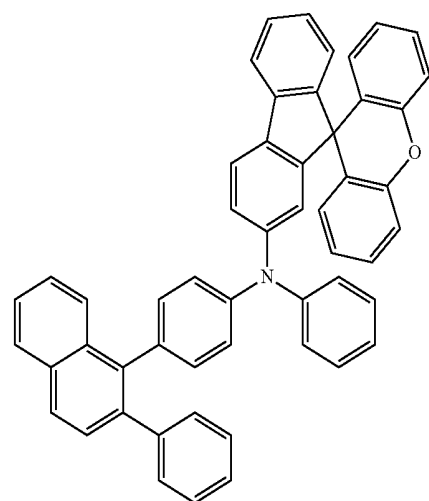

194

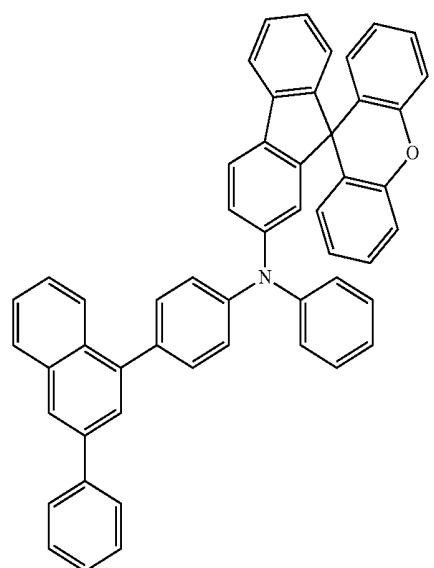


197

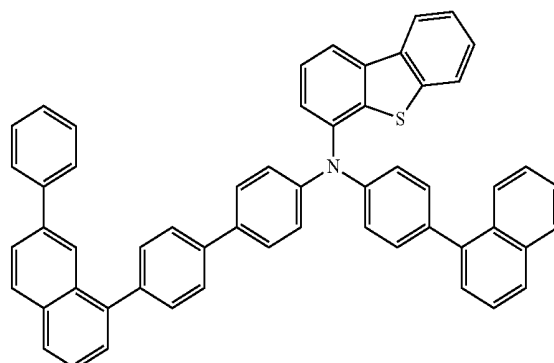


-continued


198

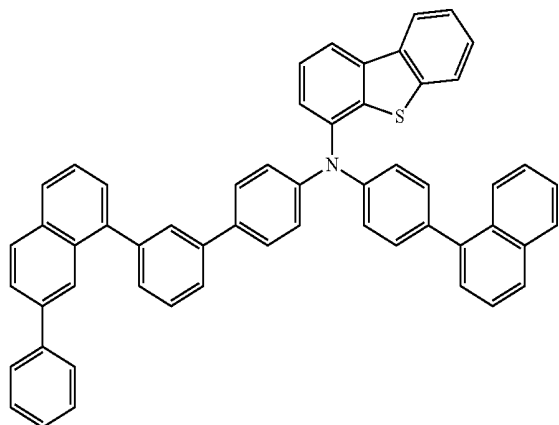


199

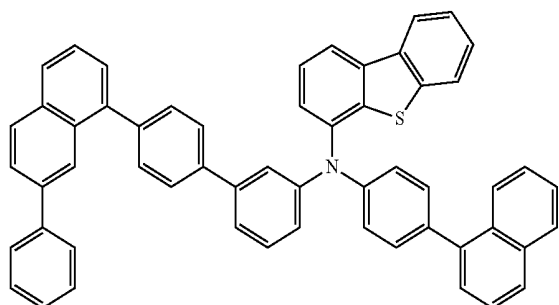

200

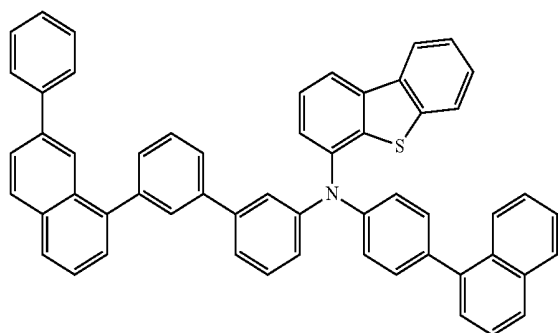


201

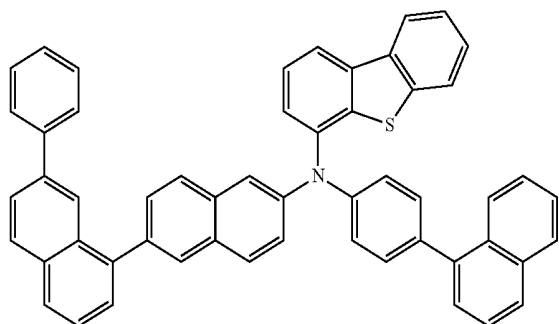


-continued


202

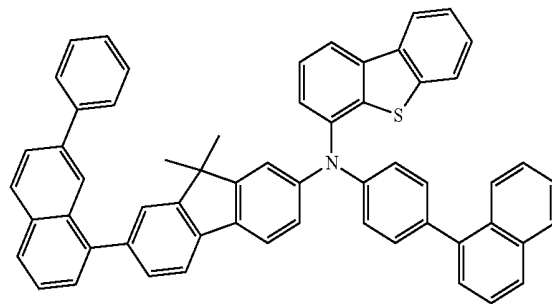


203

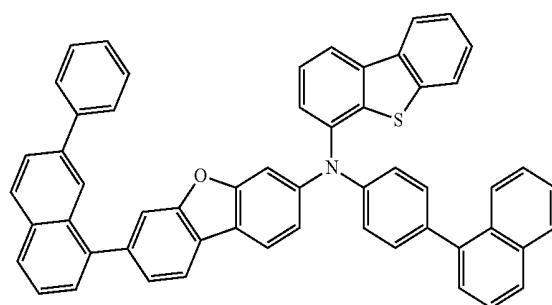

204

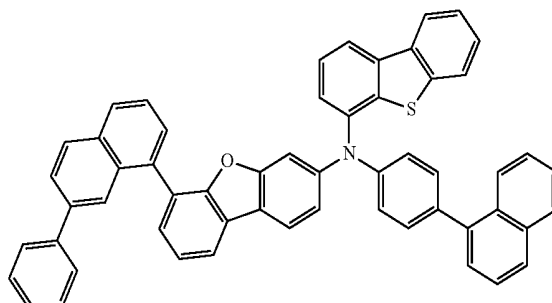


205

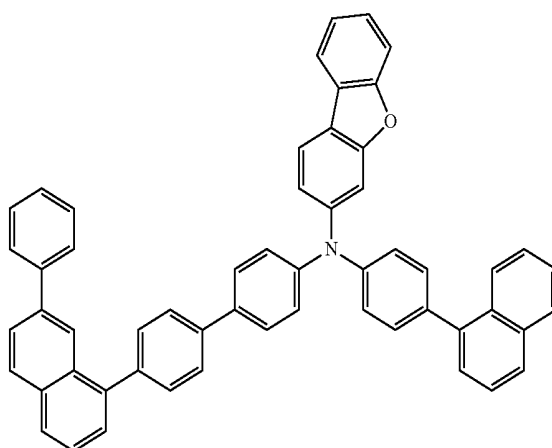


-continued


206

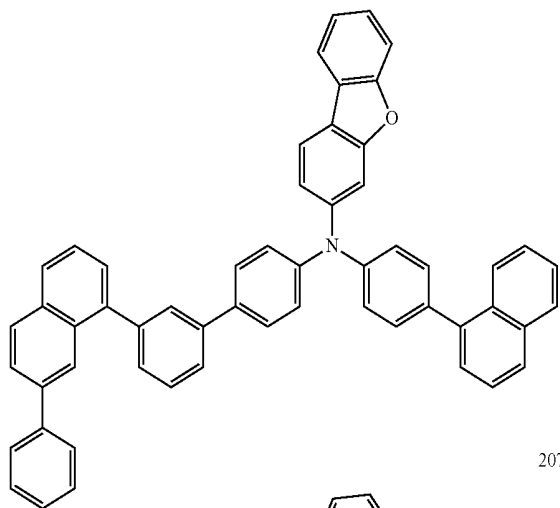


207

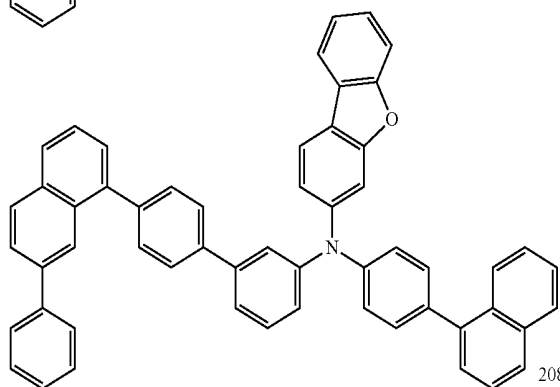

208

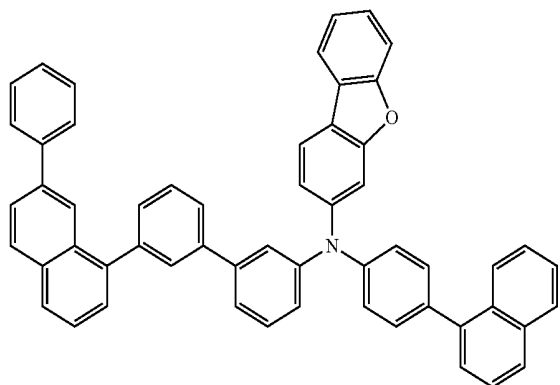


209

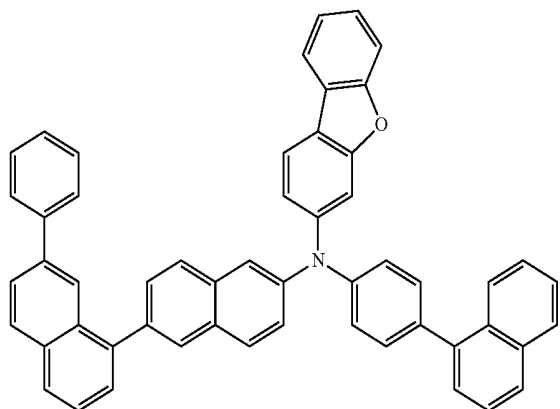


-continued


210

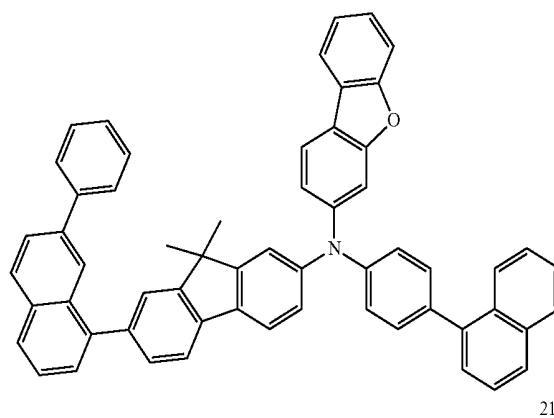

211

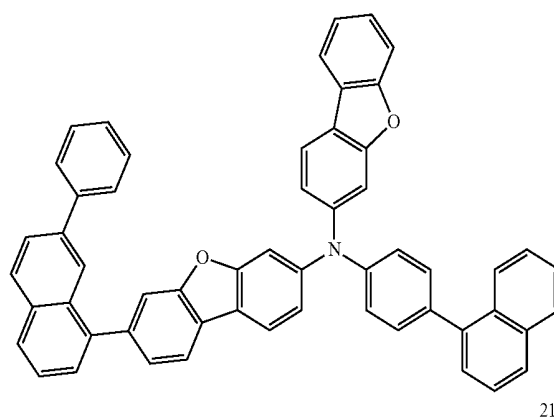


212

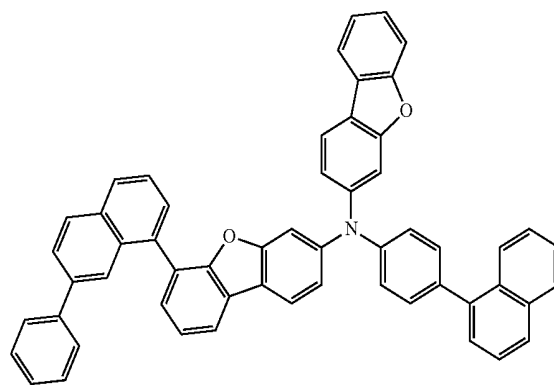

14. A monoamine compound represented by the following Formula 1:

[Formula 1]



wherein in Formula 1,

X is S, O or CRR',

R and R' are each independently a substituted or unsubstituted alkyl group having 1 to 10 carbon atoms, a

substituted or unsubstituted aryl group having 6 to 20 ring carbon atoms, or a substituted or unsubstituted heteroaryl group having 2 to 10 ring carbon atoms, and are separate or form a ring by combining adjacent groups with each other,


L_1 and L_2 are each independently a direct linkage, a substituted or unsubstituted arylene group having 6 to 12 ring carbon atoms, or a substituted or unsubstituted heteroarylene group having 2 to 12 ring carbon atoms, n and m are each independently an integer of 0 to 2,

R_A is a hydrogen atom, a substituted or unsubstituted alkyl group having 1 to 10 carbon atoms, a substituted or unsubstituted aryl group having 6 to 30 ring carbon atoms, or a substituted or unsubstituted heteroaryl group having 2 to 30 ring carbon atoms,

q is an integer of 0 to 7,

Ar_1 is a substituted or unsubstituted aryl group having 6 to 12 ring carbon atoms, or a substituted or unsubstituted heteroaryl group having 2 to 12 ring carbon atoms, provided that when X is CRR' , Ar_1 does not include a heteroaryl group, and

FR is represented by the following Formula 2:




[Formula 2]

wherein in Formula 2,

R_1 is a hydrogen atom, a deuterium atom, or a halogen atom, and

a is an integer of 0 to 6.

15. The monoamine compound as claimed in claim 14, wherein FR is represented by the following Formula 2-1:



[Formula 2-1]

wherein in Formula 2-1,

b is an integer of 0 to 5, and R_1 is the same as defined in Formula 2.

16. The monoamine compound as claimed in claim 14, wherein n is 1, and L_1 is a substituted or unsubstituted arylene group having 6 to 12 ring carbon atoms.


17. The monoamine compound as claimed in claim 14, wherein L_1 is a substituted or unsubstituted phenylene group.

18. The monoamine compound as claimed in claim 14, wherein m is 1, L_2 is a substituted or unsubstituted arylene group having 6 to 12 ring carbon atoms, and Ar_1 is a substituted or unsubstituted aryl group having 6 to 12 ring carbon atoms.


19. The monoamine compound as claimed in claim 14, wherein m is 0, and Ar_1 is a substituted or unsubstituted heteroaryl group having 5 to 12 ring carbon atoms.

20. The monoamine compound as claimed in claim 14, wherein the monoamine compound represented by Formula 1 is selected from the following Compound Group 1:


[Compound Group 1]

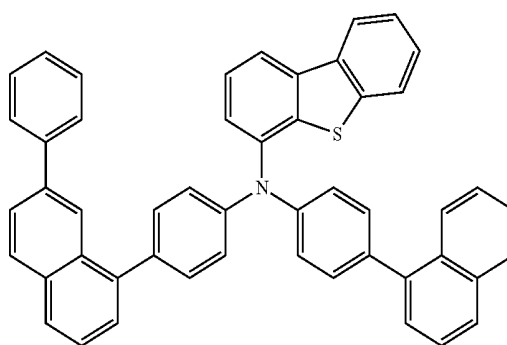


1

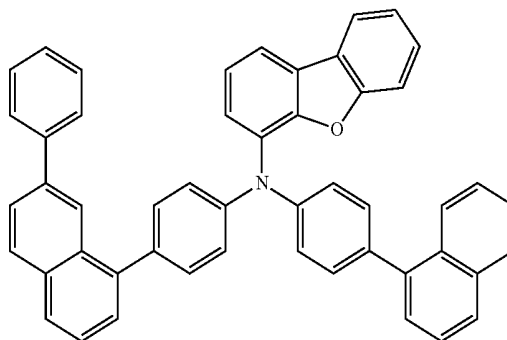

2

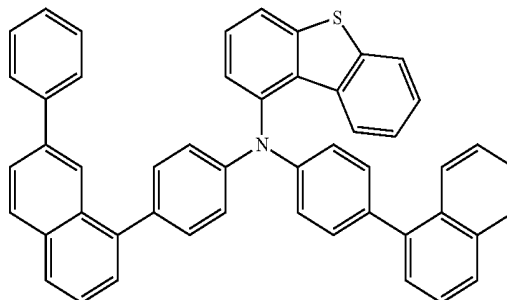


3

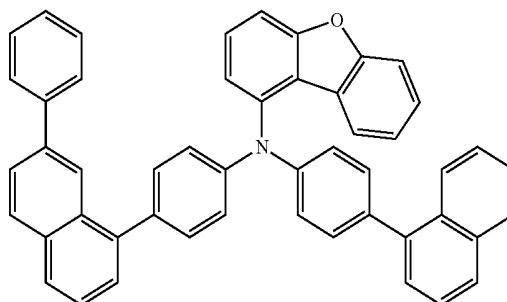


4


-continued

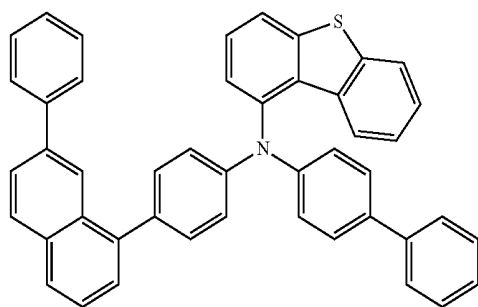


5

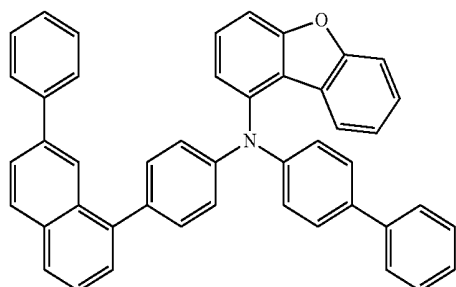

6

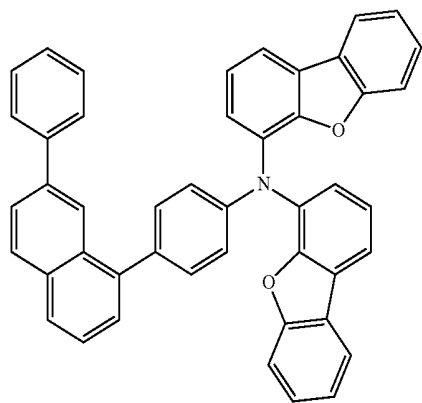


7

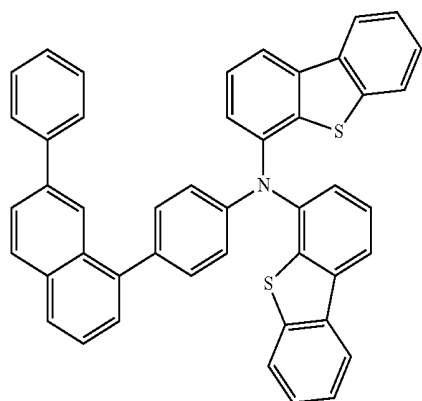


8


-continued

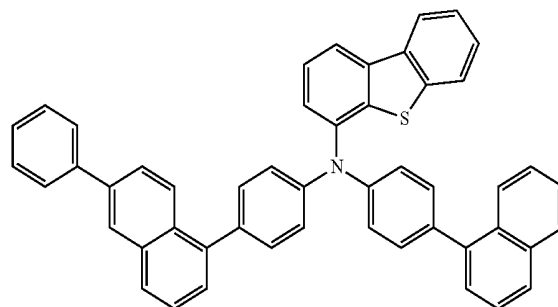


9

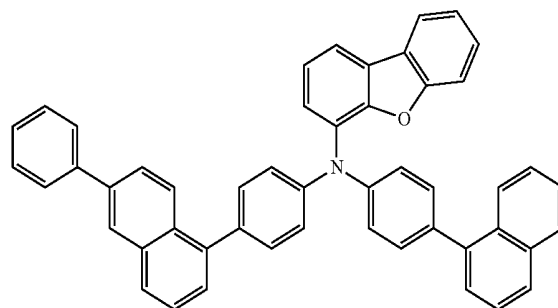


10

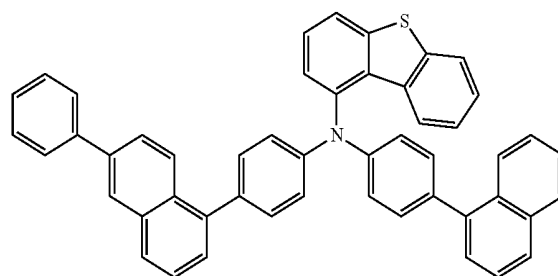

11

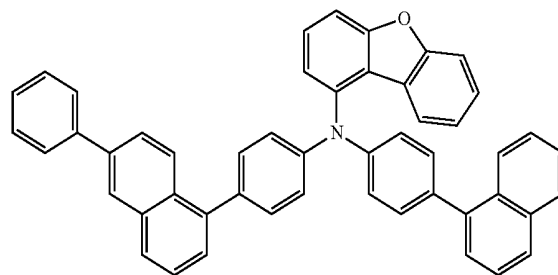


12

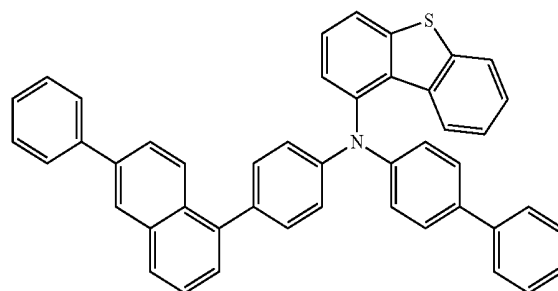


13

-continued


14

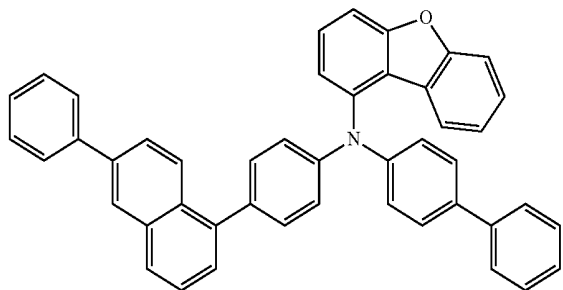


15

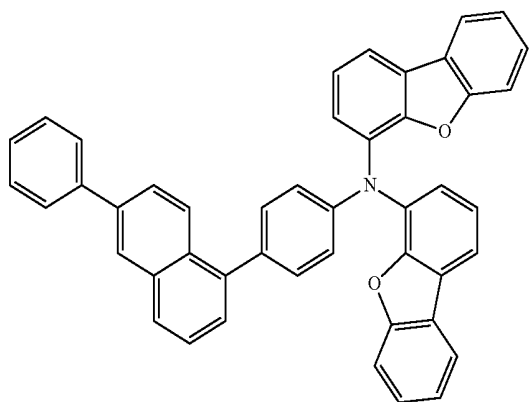

16

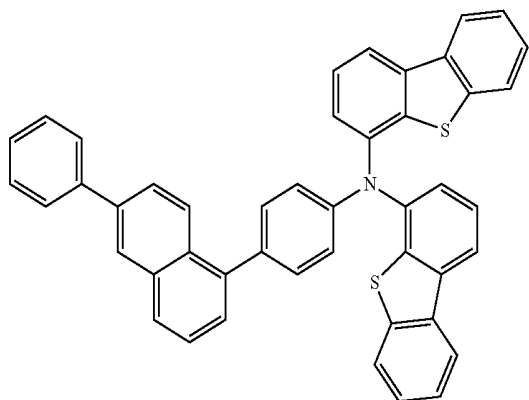


17

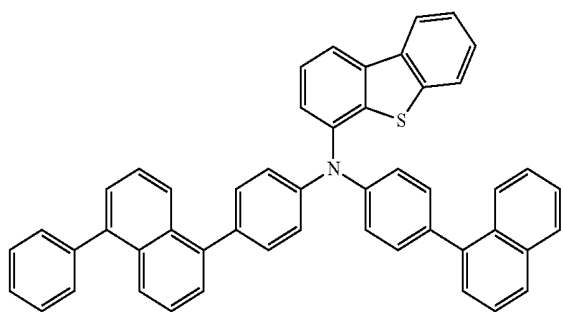


-continued


18

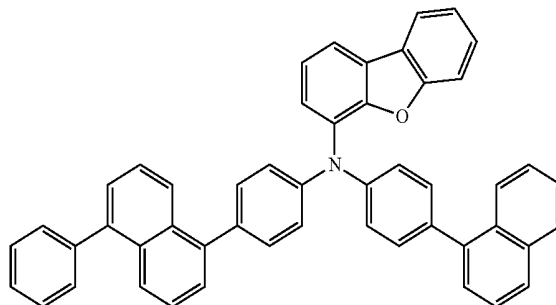


19

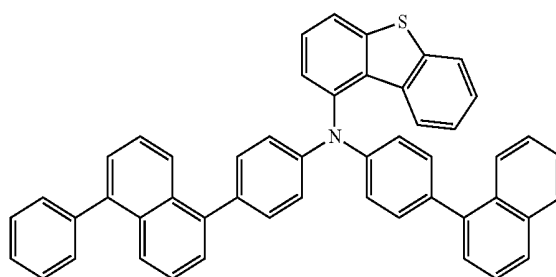


20

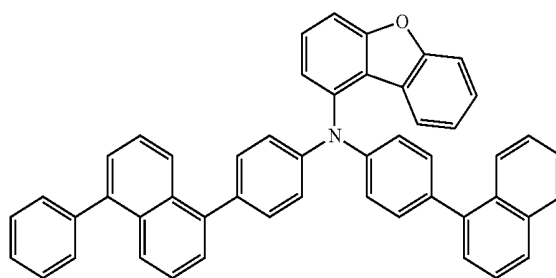


21

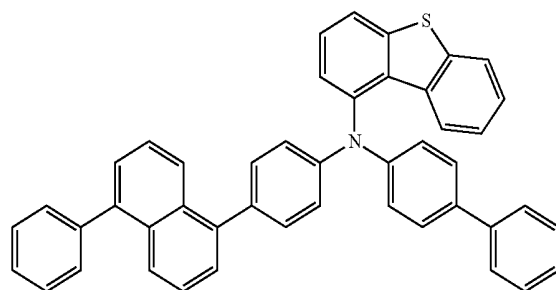

22

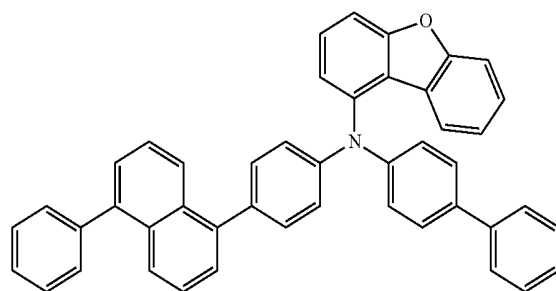


-continued

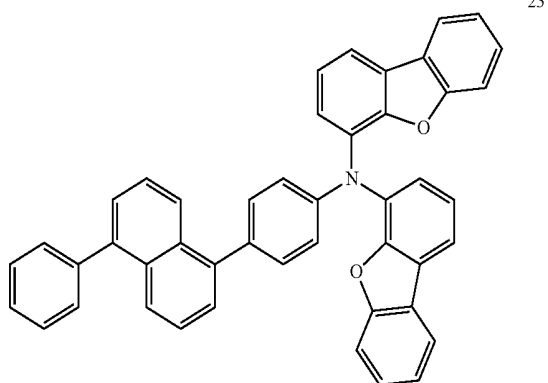


23


-continued

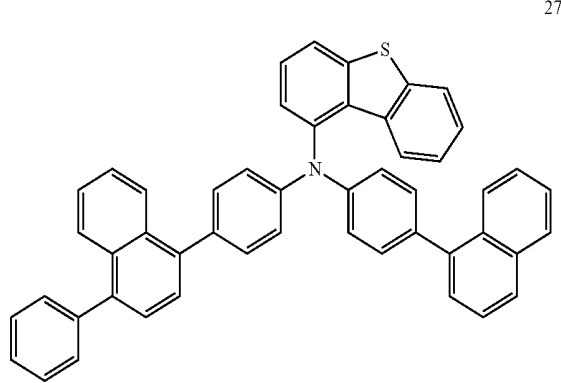


27

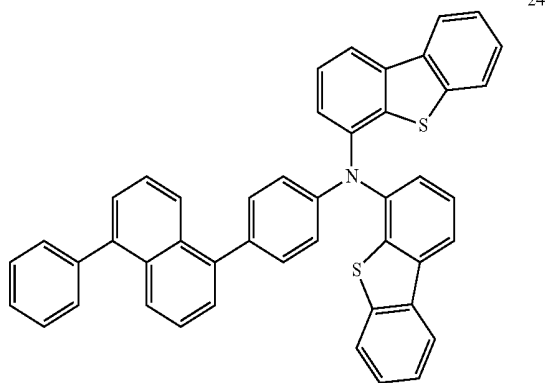


24

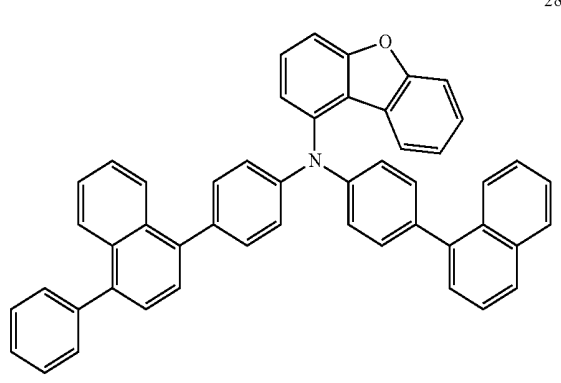


28

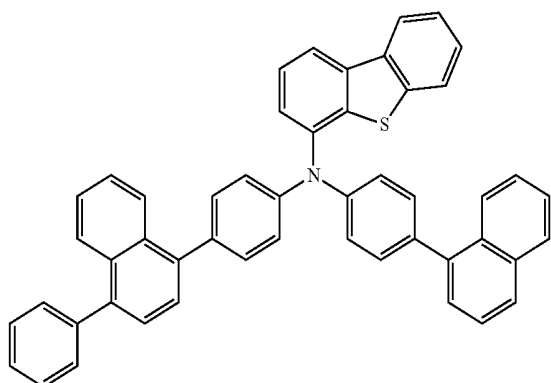


25

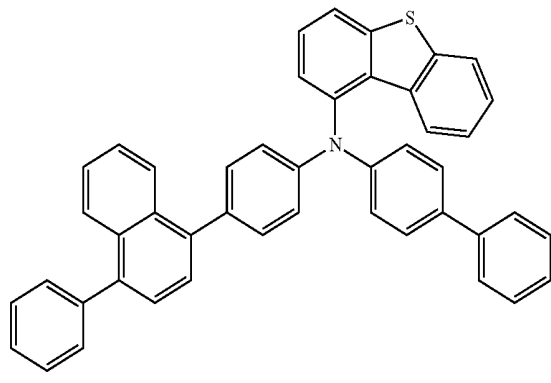

29




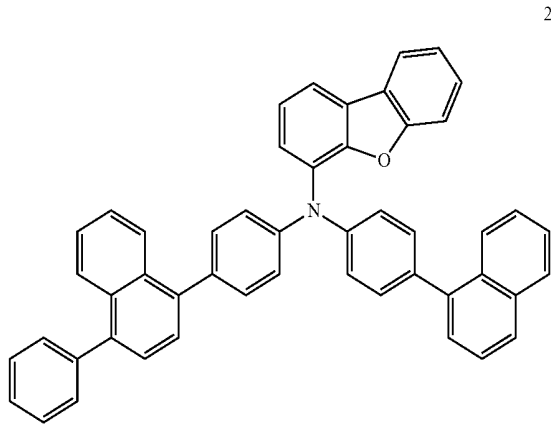


26




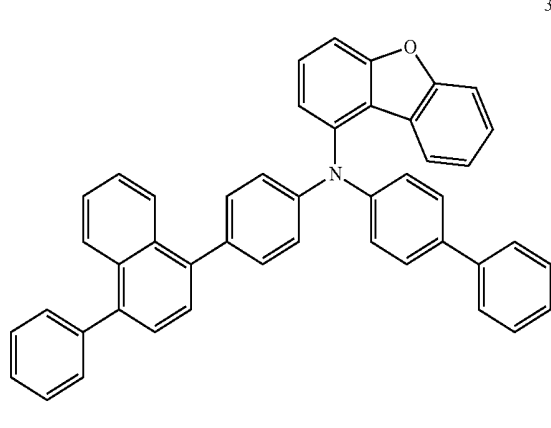


30


-continued

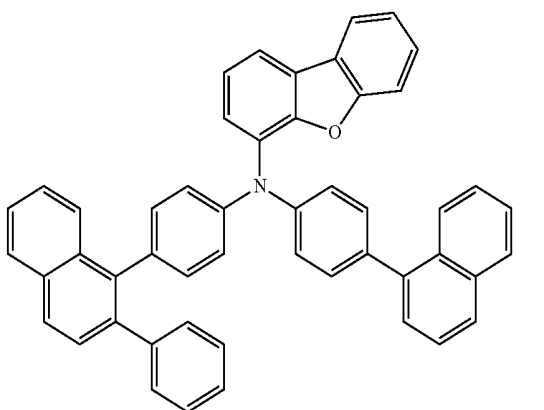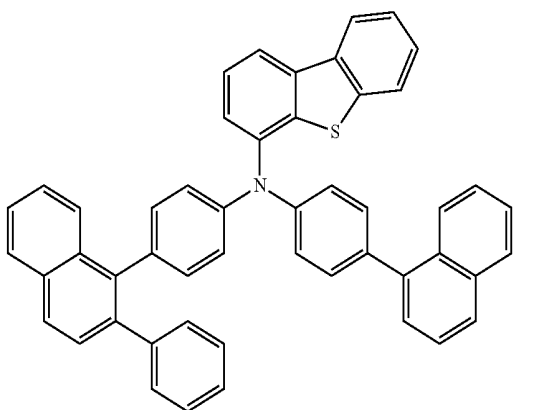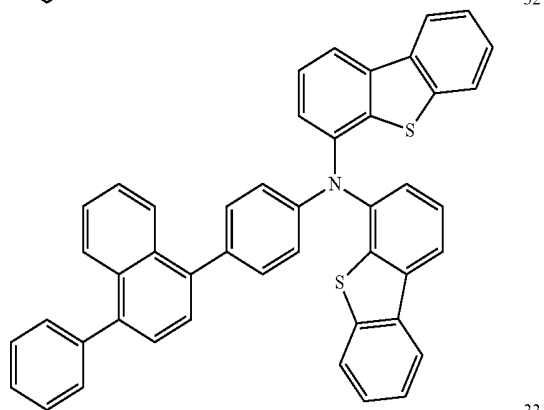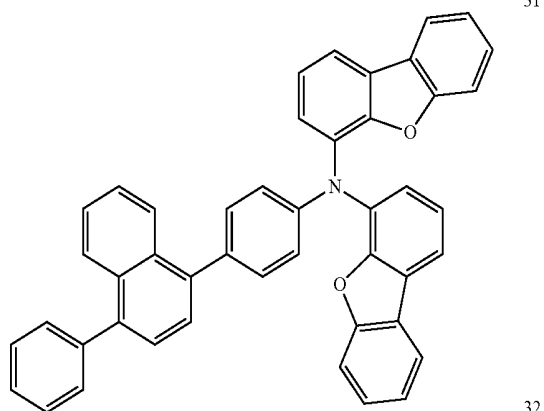


-continued

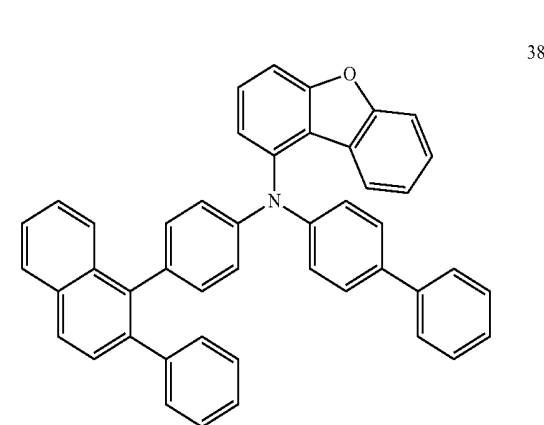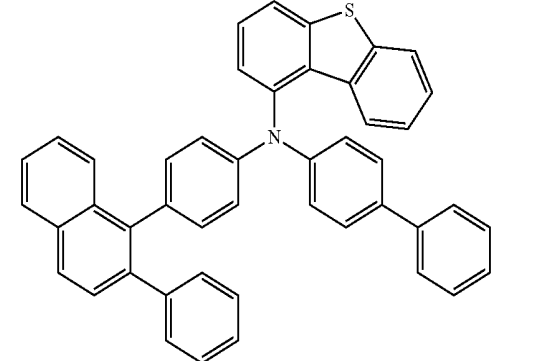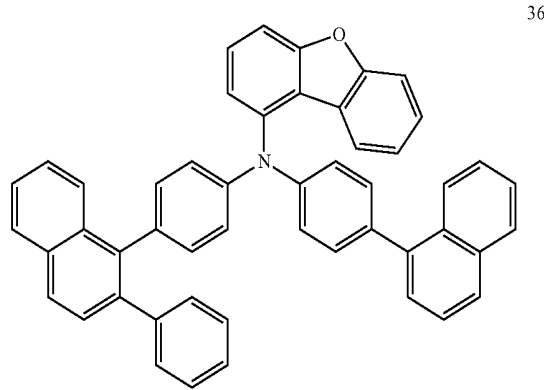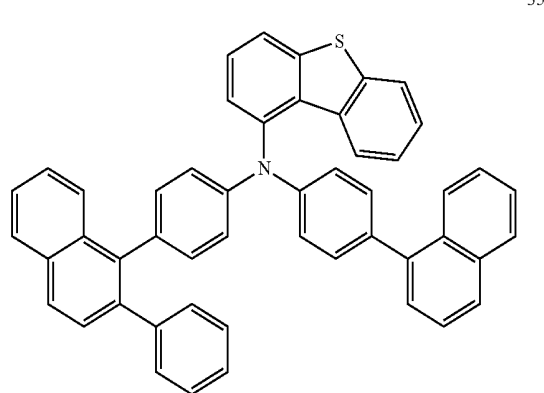


-continued

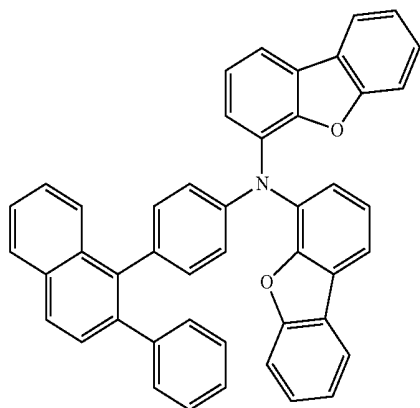


-continued

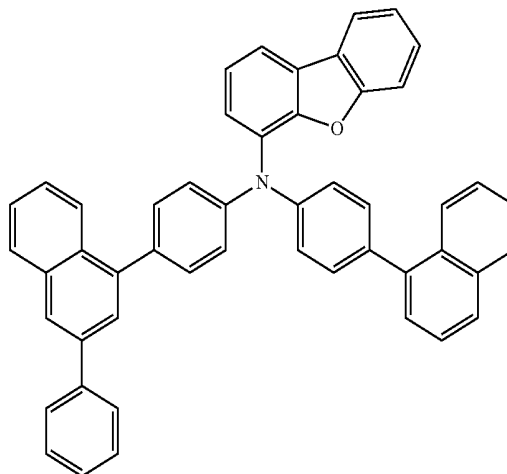


40

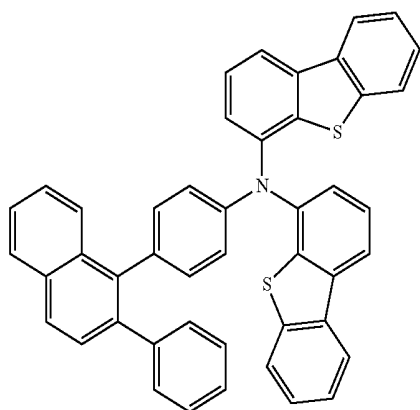


43

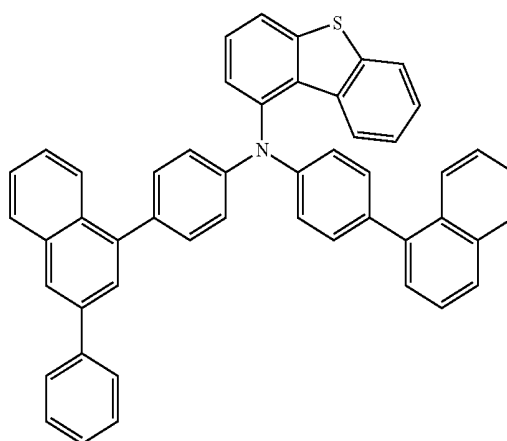





41

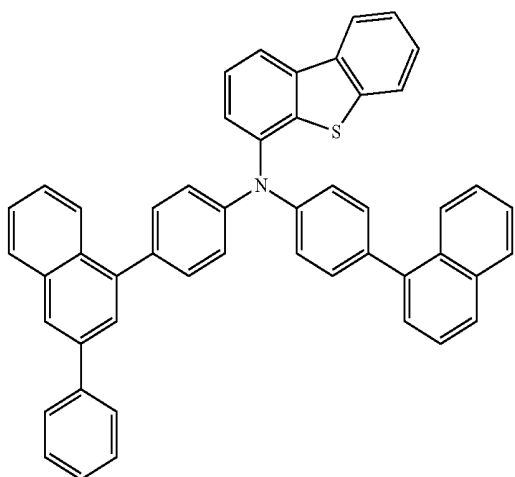





44

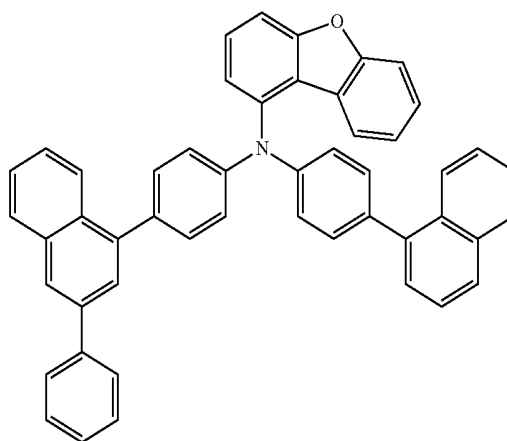

-continued

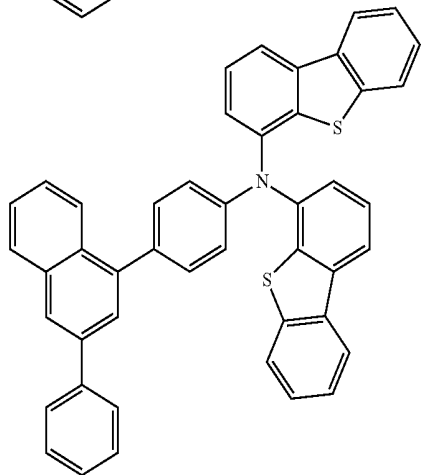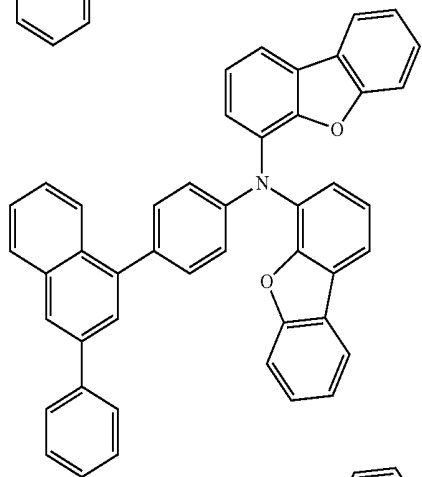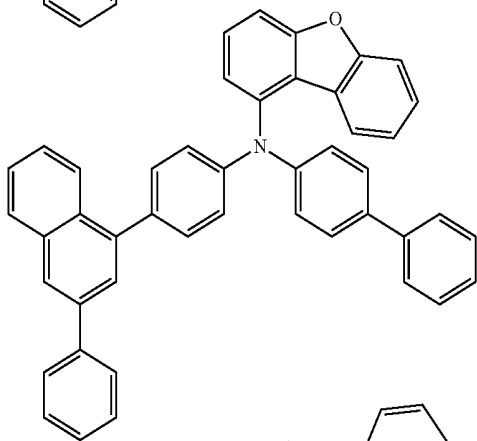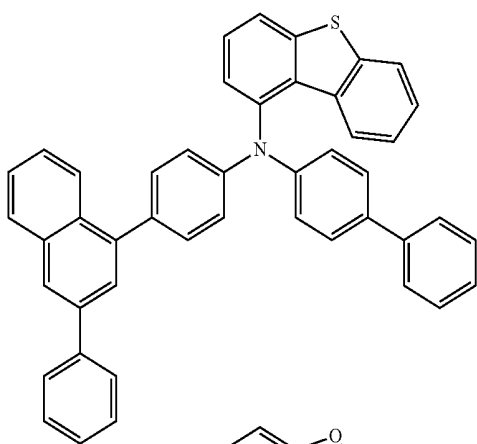


-continued

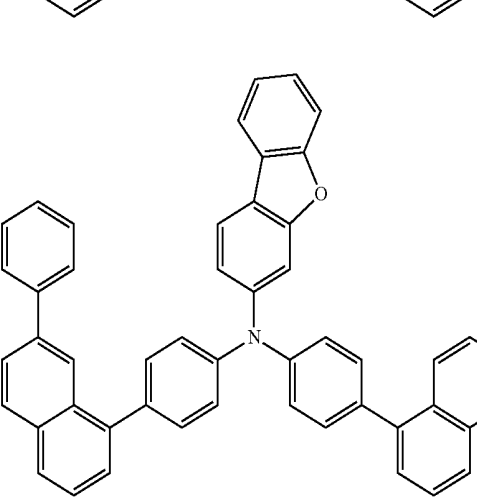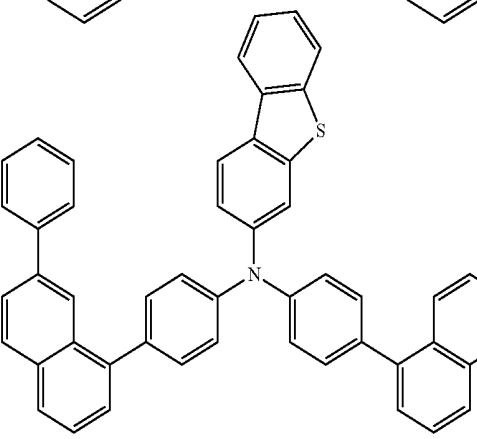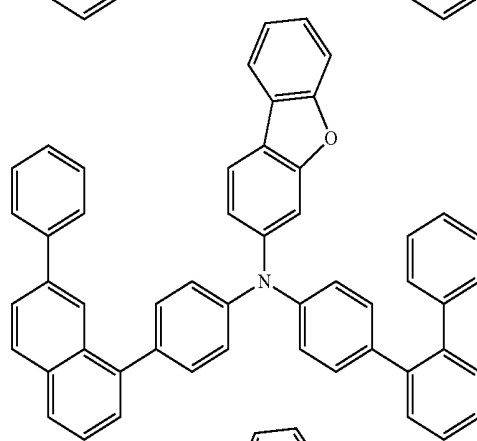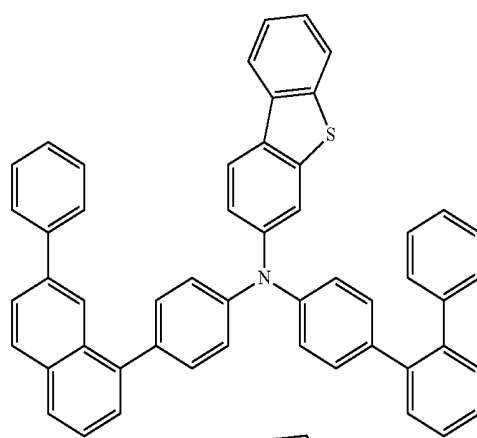


-continued


53

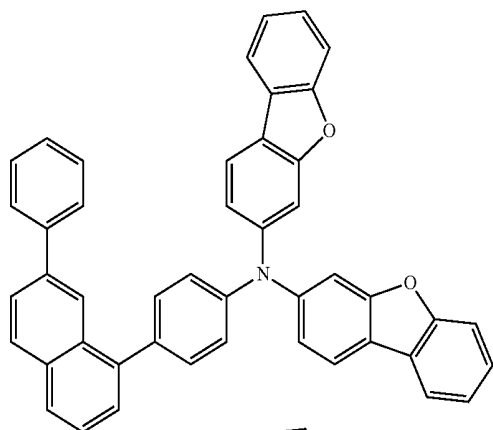


54

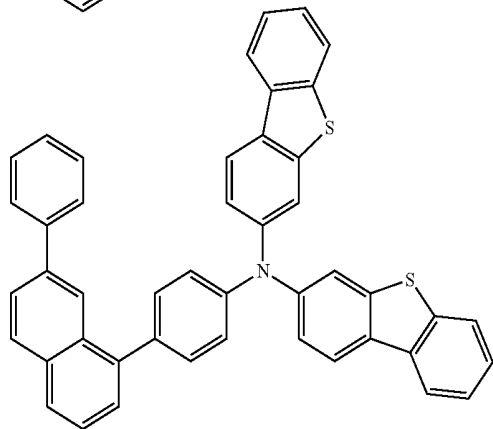

55

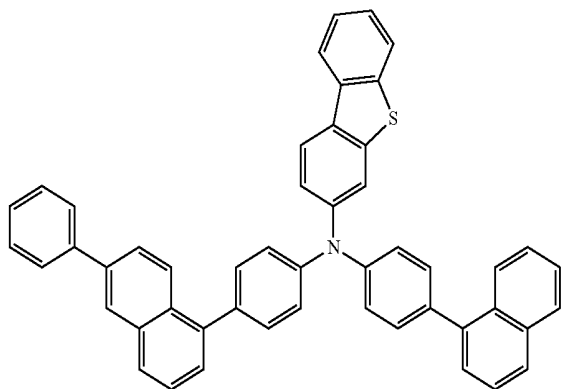


56

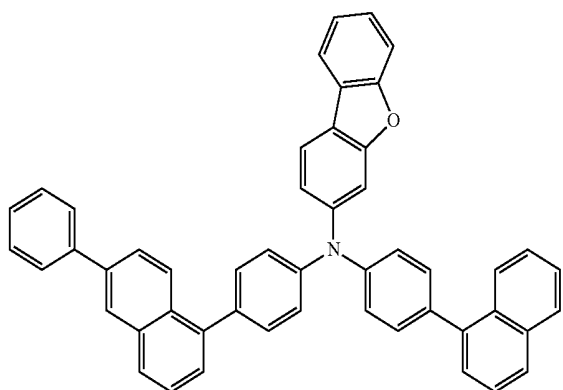


-continued


57

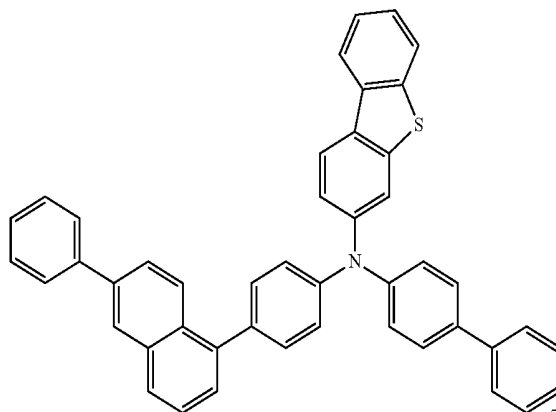


58

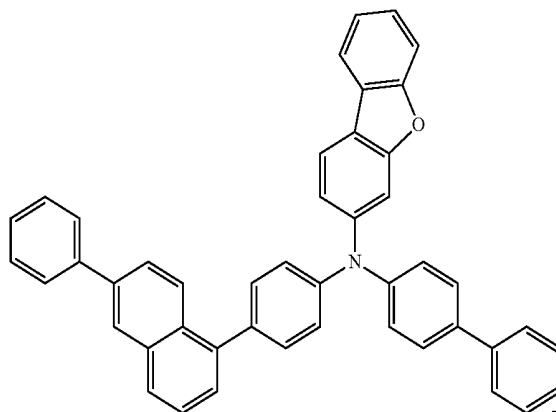

59

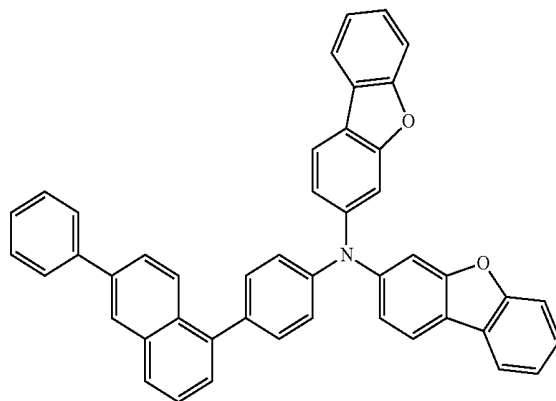


60

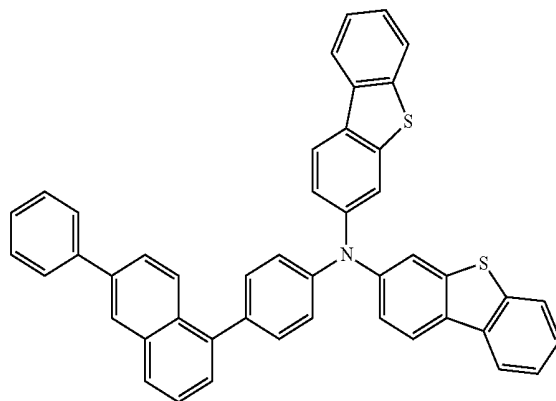



-continued

61


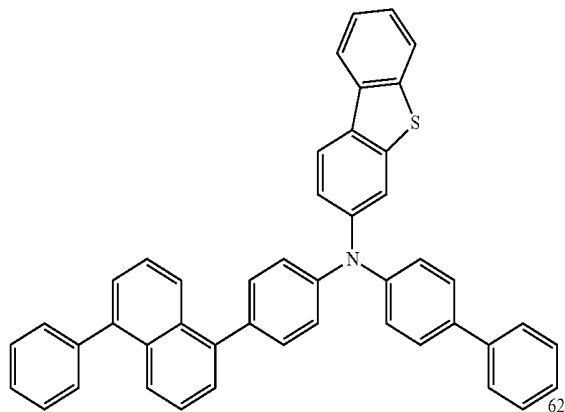


-continued

65

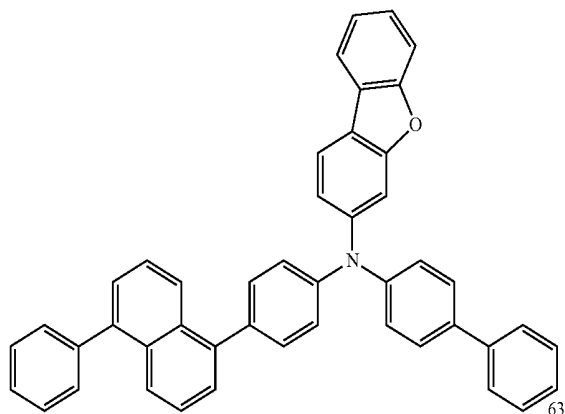
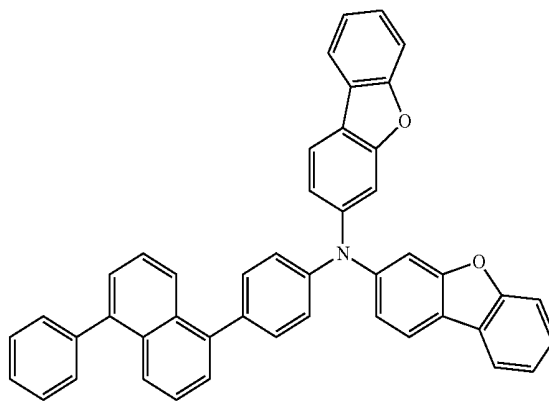


66

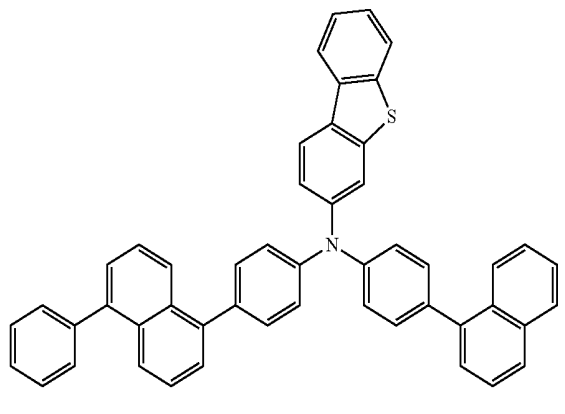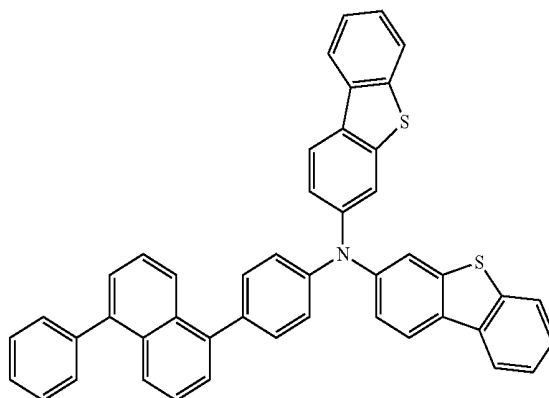


64

67

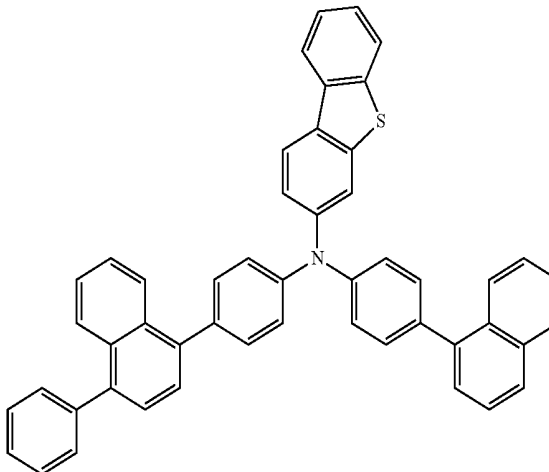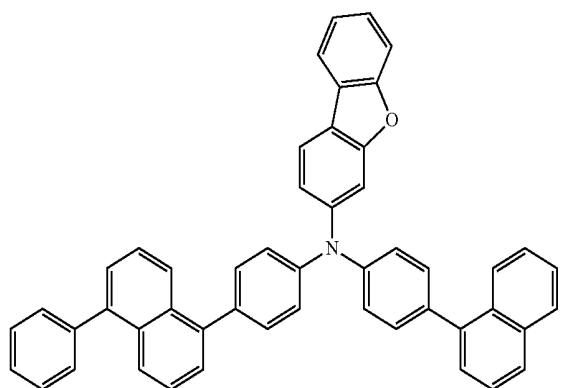


-continued

68

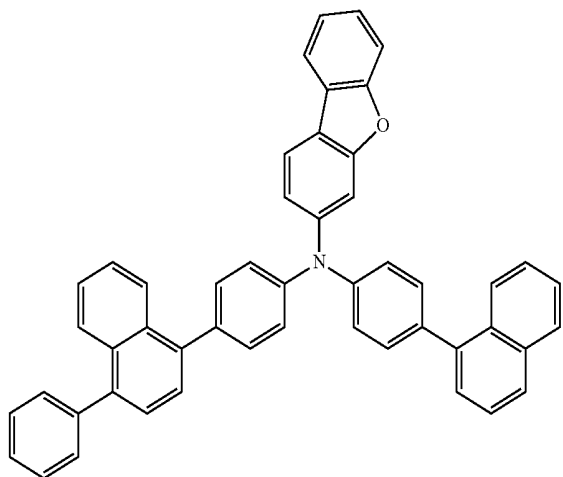


-continued


71

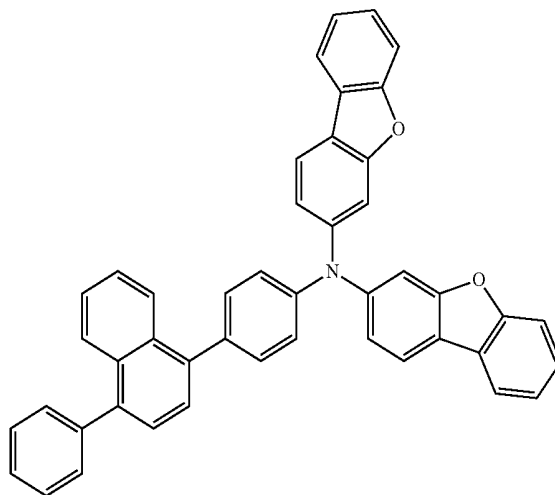


69

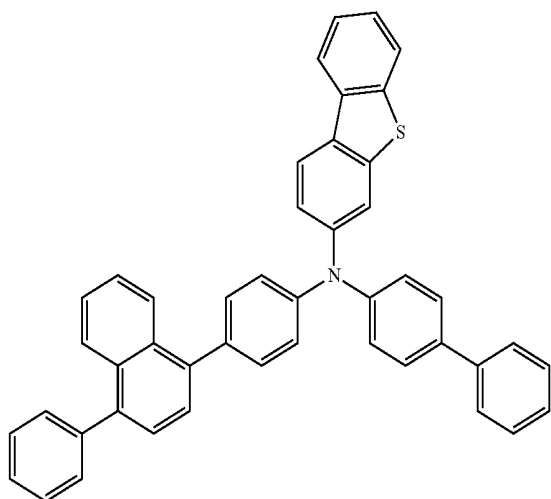


72

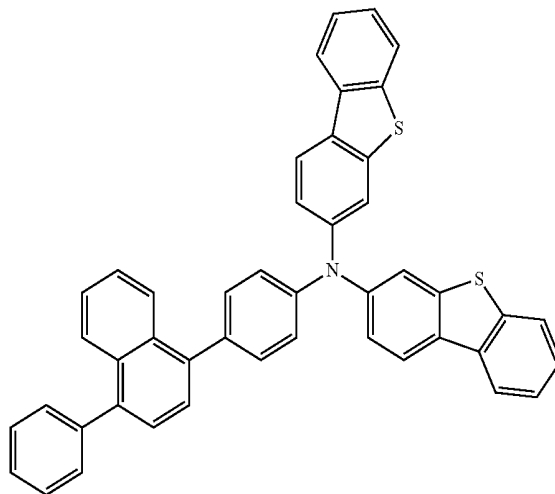

70

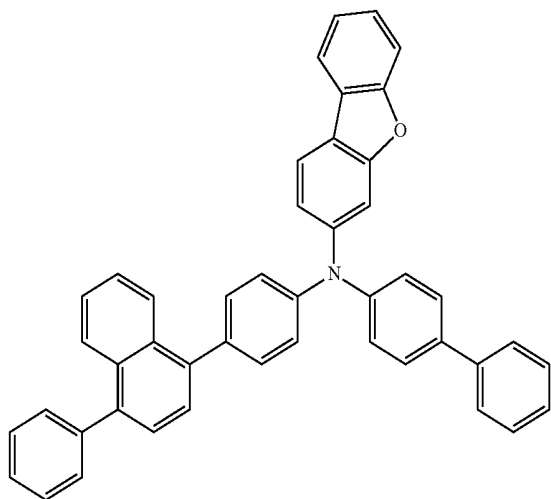


73

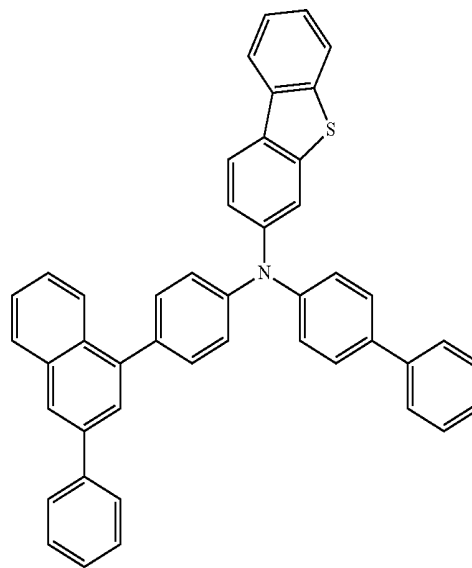


-continued


74

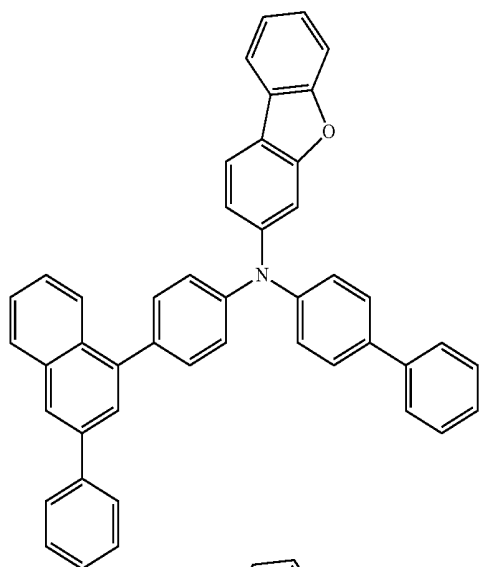

75

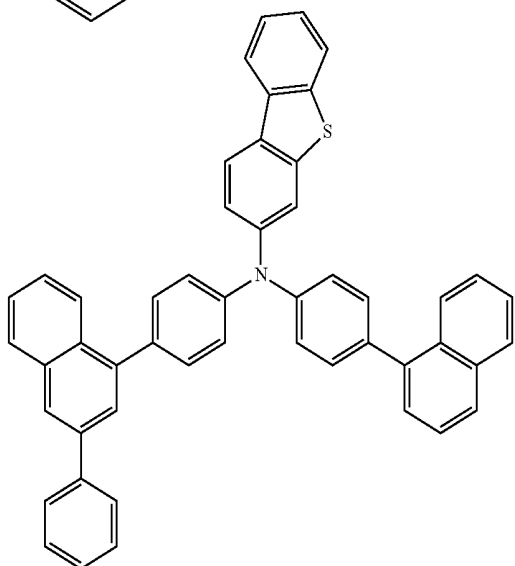


76

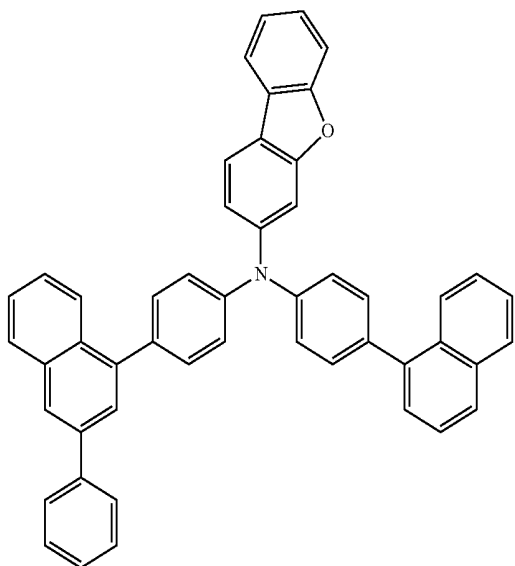


-continued


77

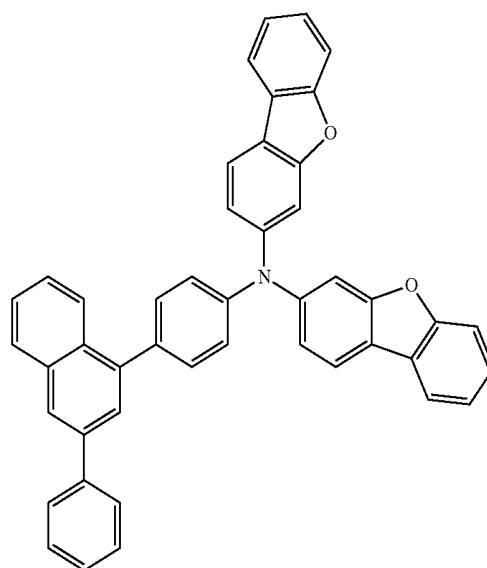


78

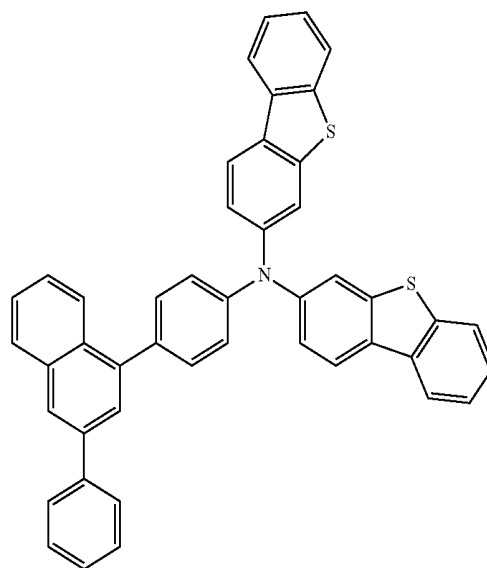

79

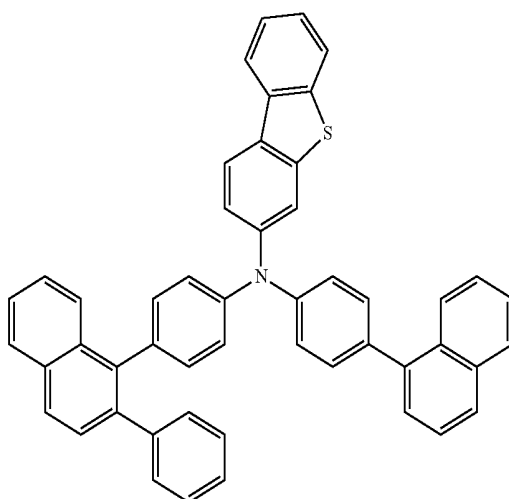


-continued

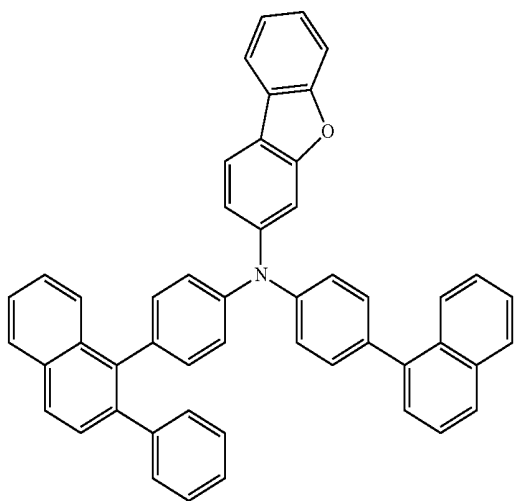


80


-continued

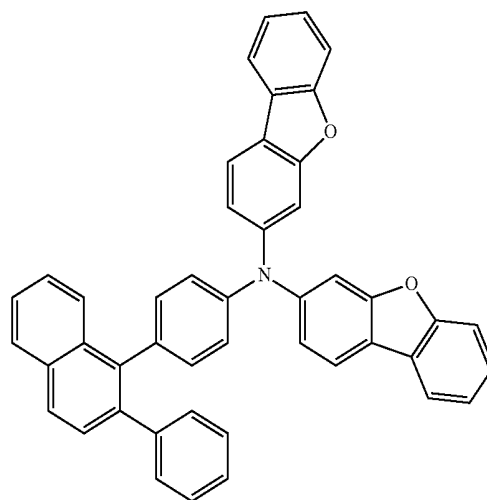


83

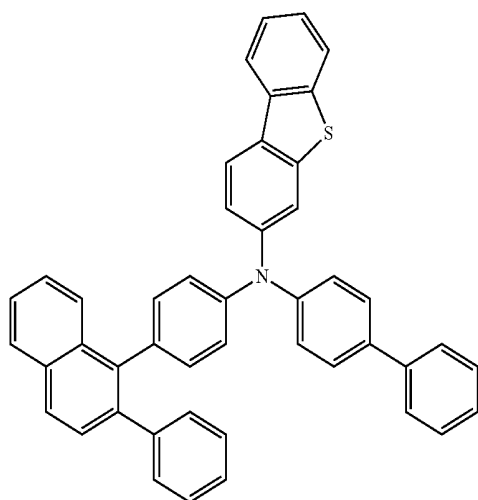


81

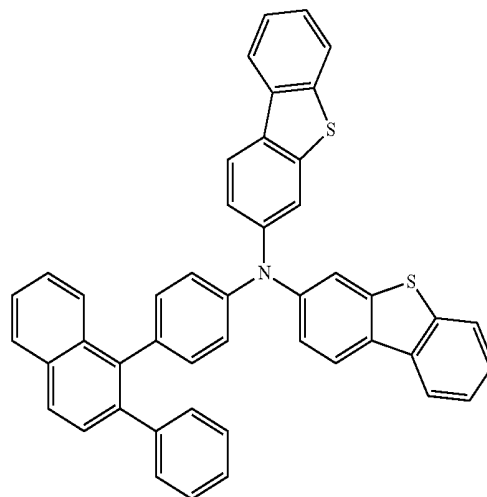


84

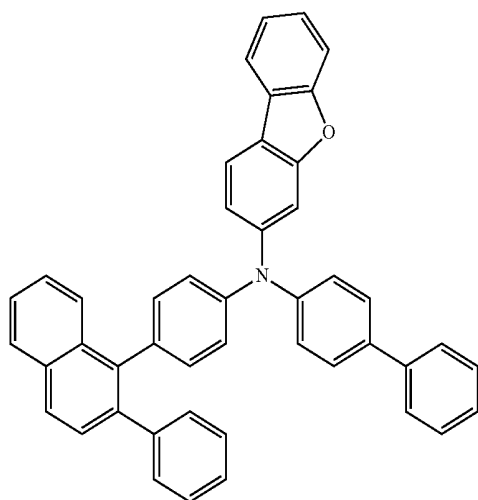


82

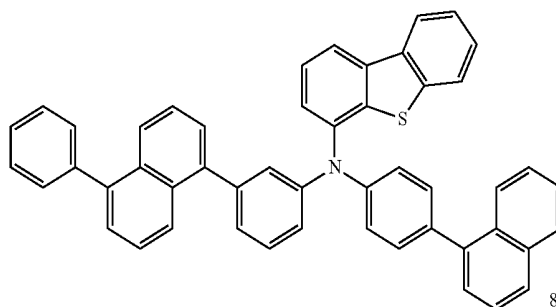

85

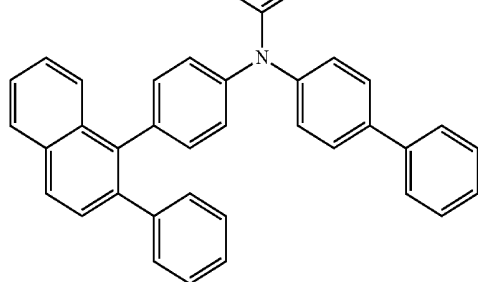


86

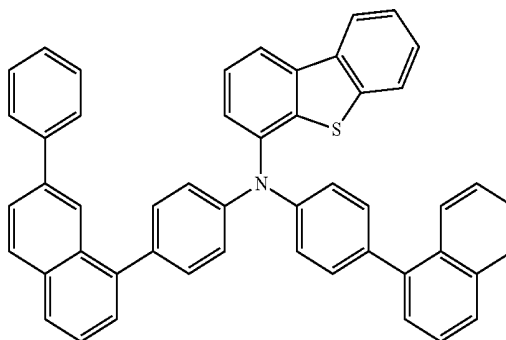


-continued


87

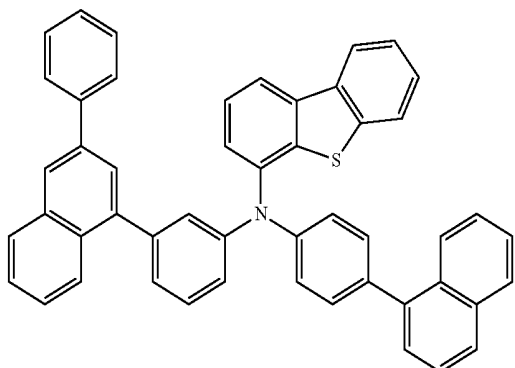


88

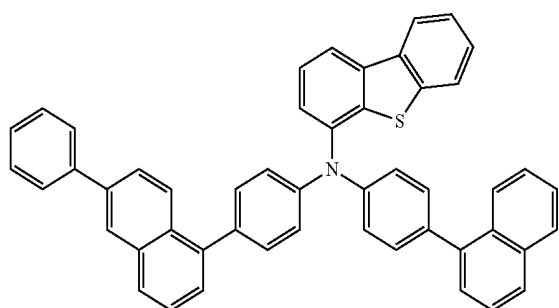

89

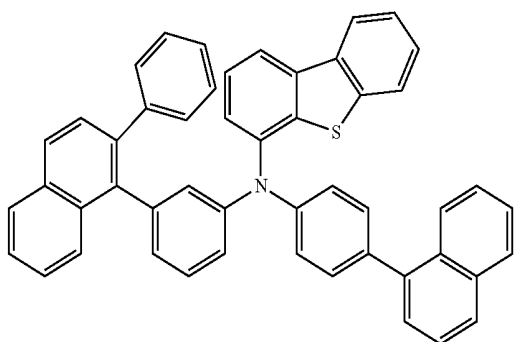


90

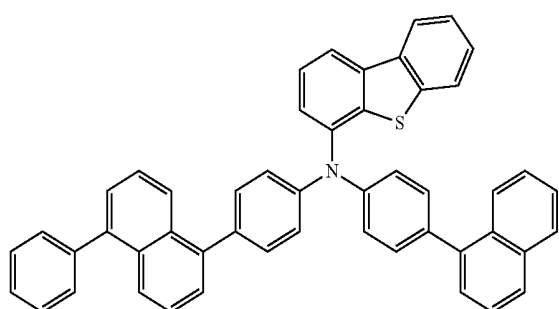


-continued


91

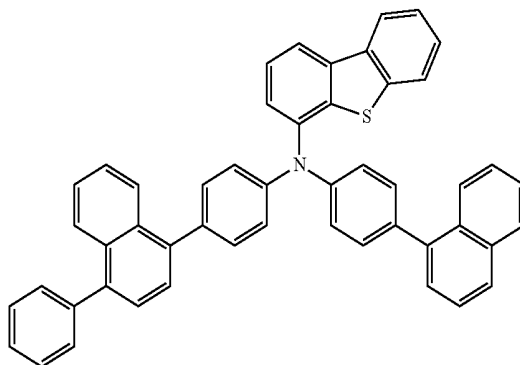


92

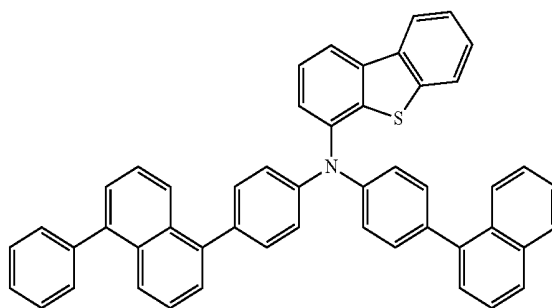

93

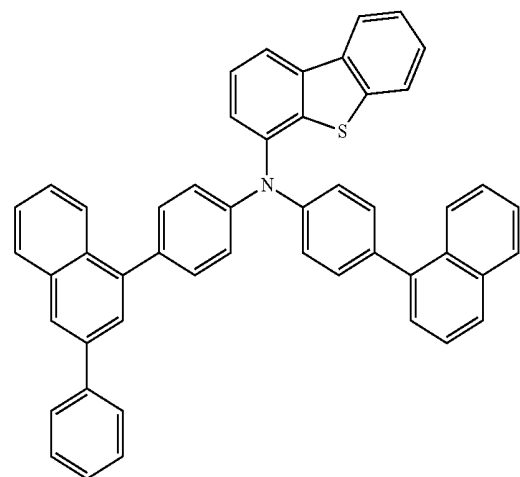


94

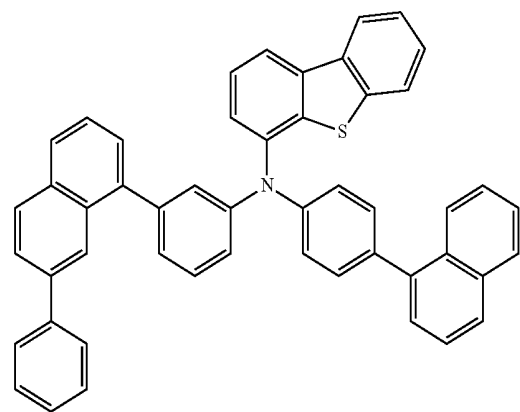


-continued


95

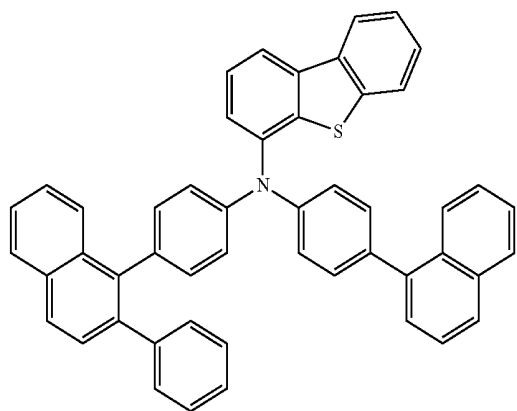


96

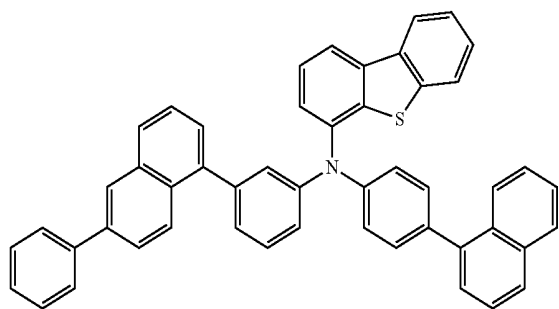

97

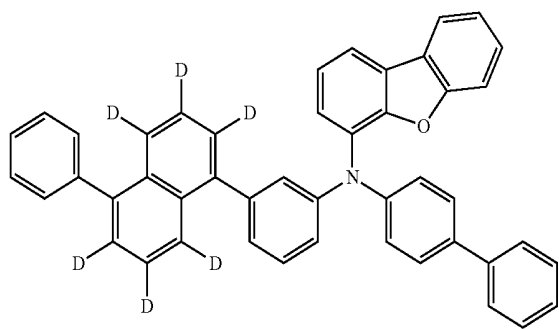


98

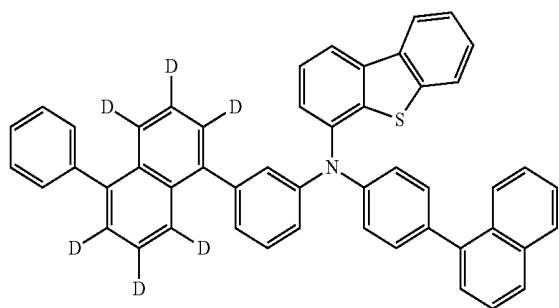


-continued


99

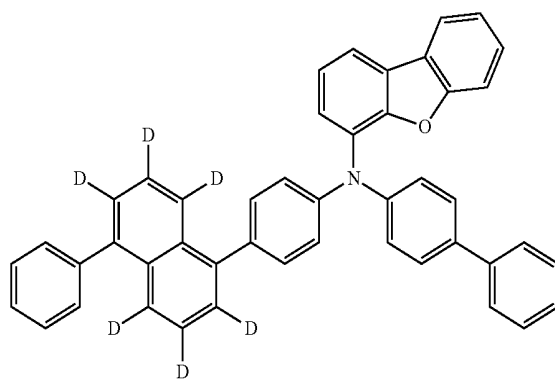


100

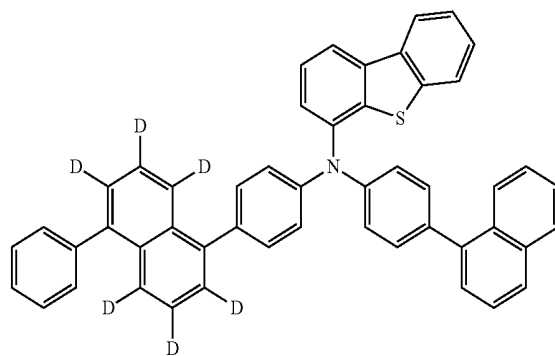

101

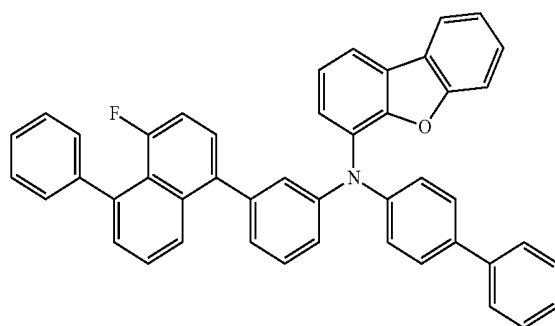


102

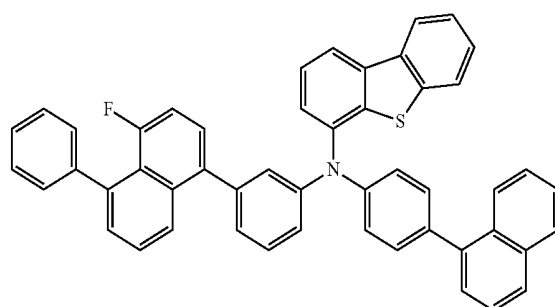


-continued


103

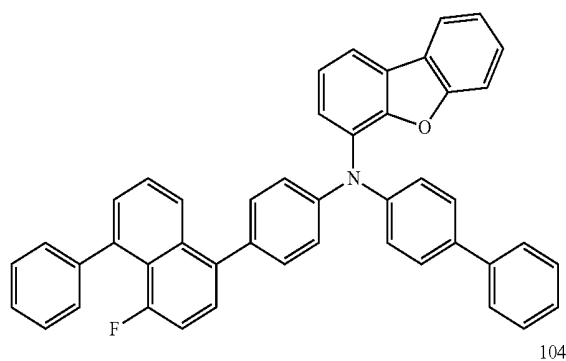


104

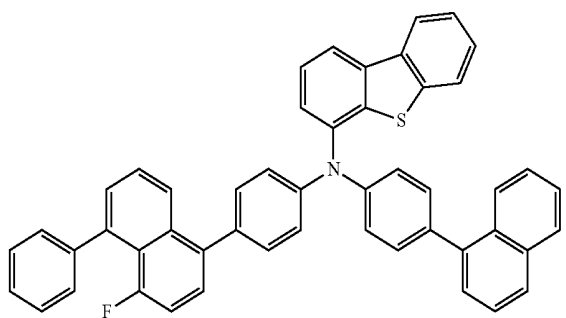

105

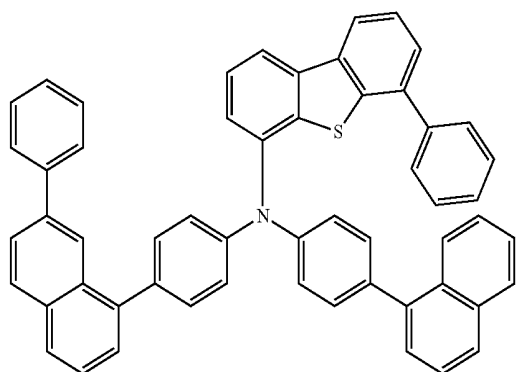


106

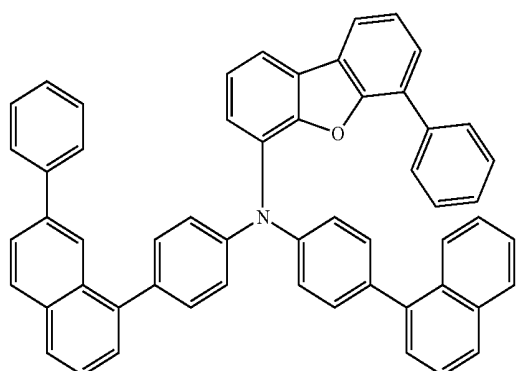


-continued


107

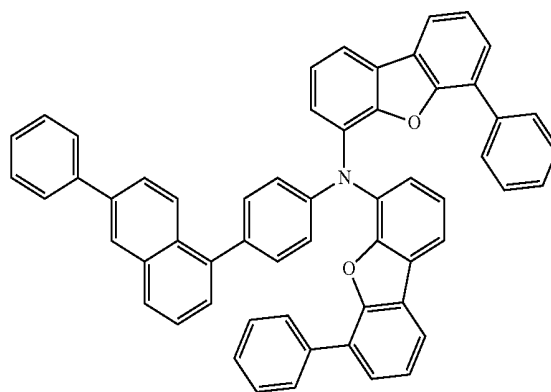


108

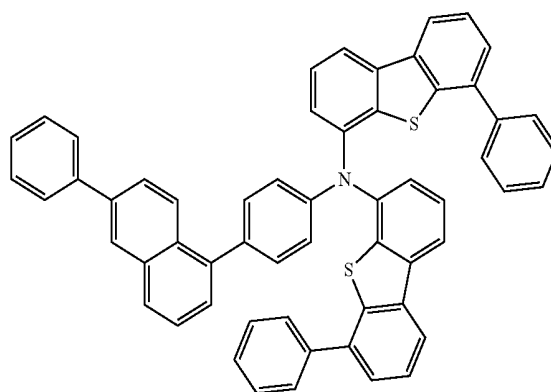

109

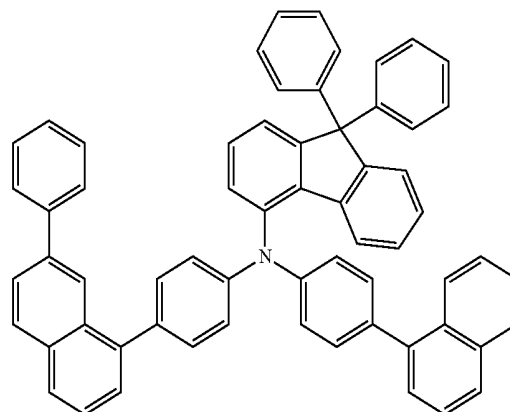


110

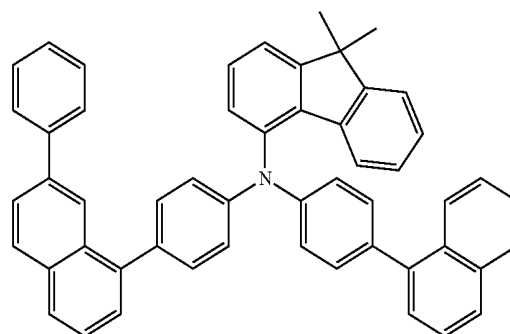


-continued

111

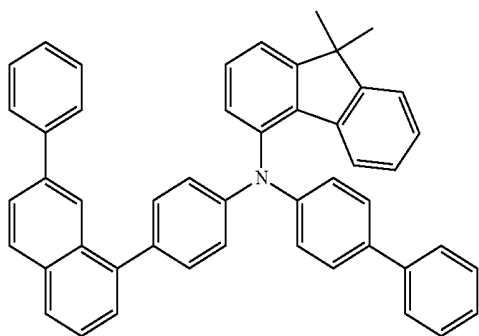


-continued


115

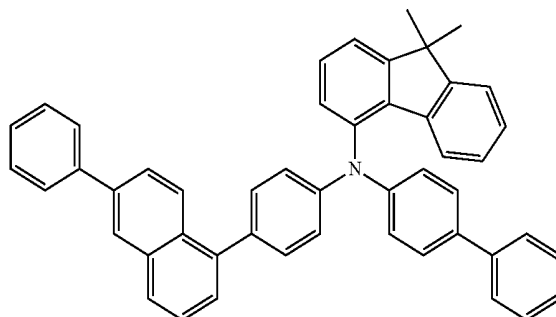


112

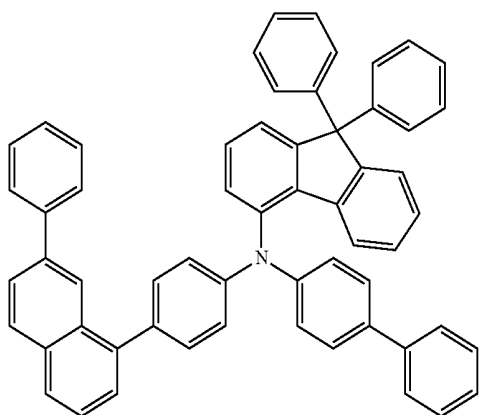


116

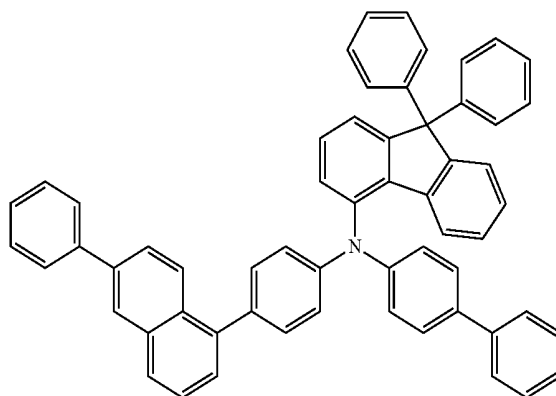


113

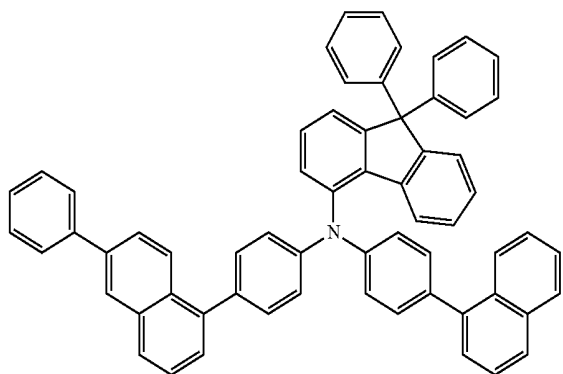


117

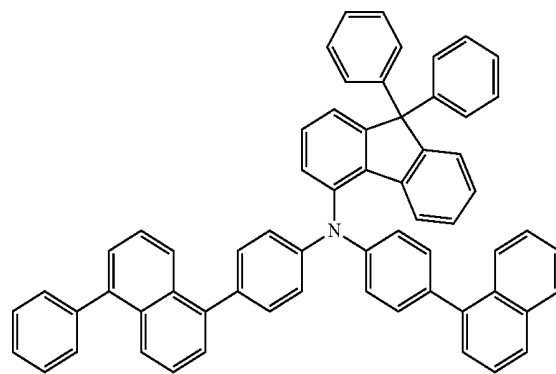

114

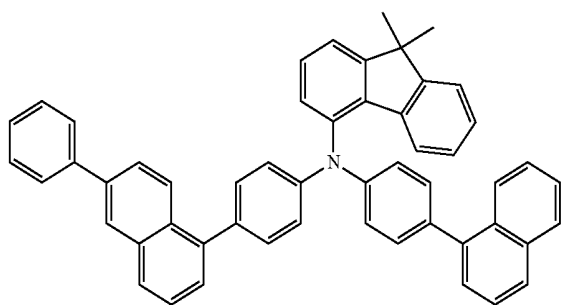


118

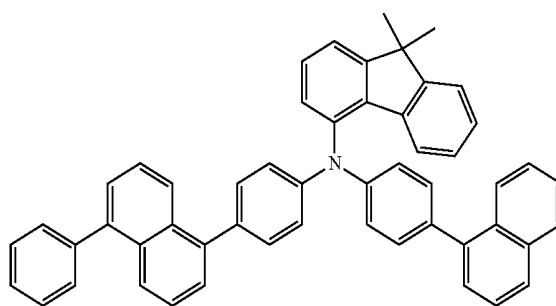


-continued


119

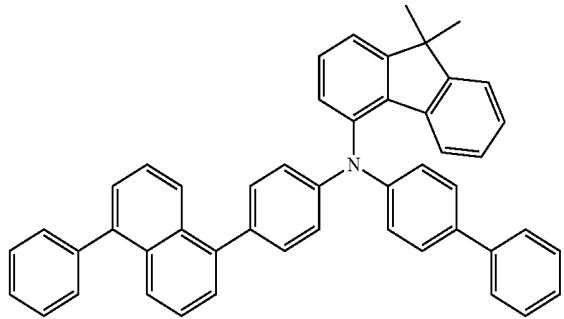


120

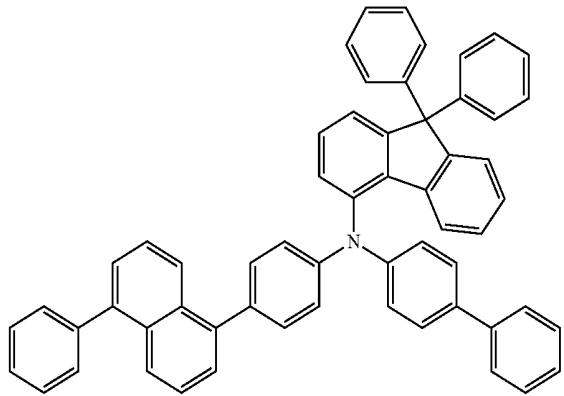

121

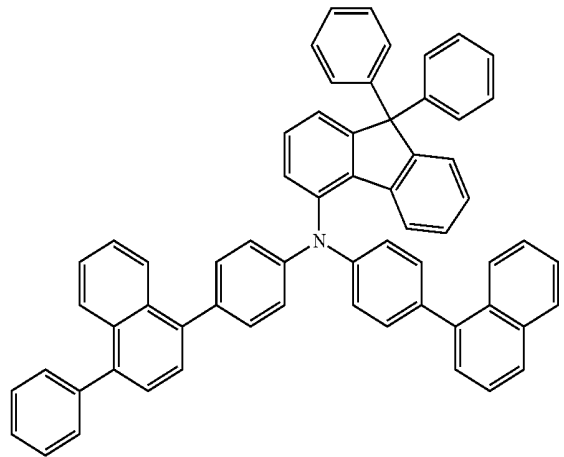


122

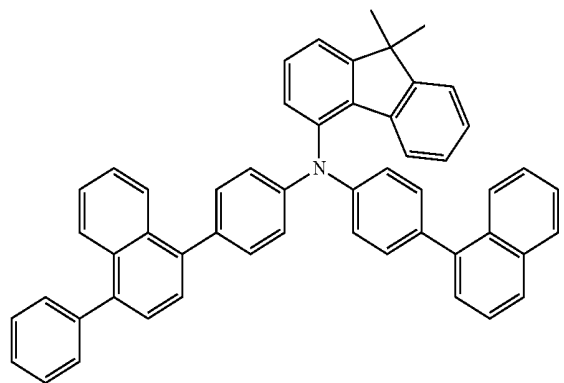


-continued


123

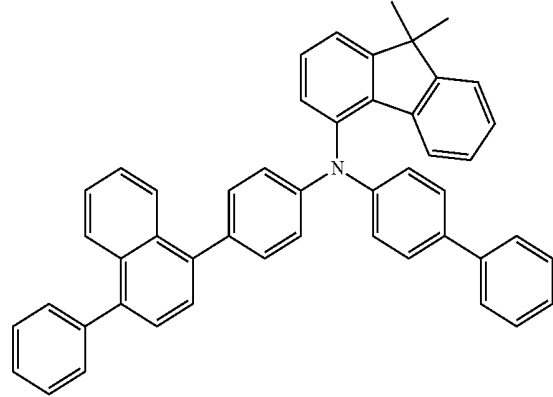

124

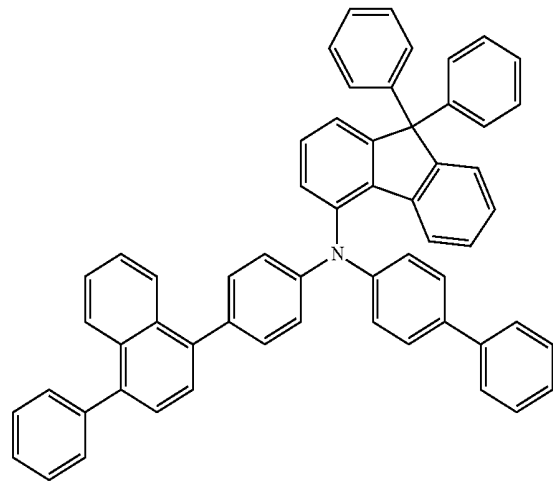


125

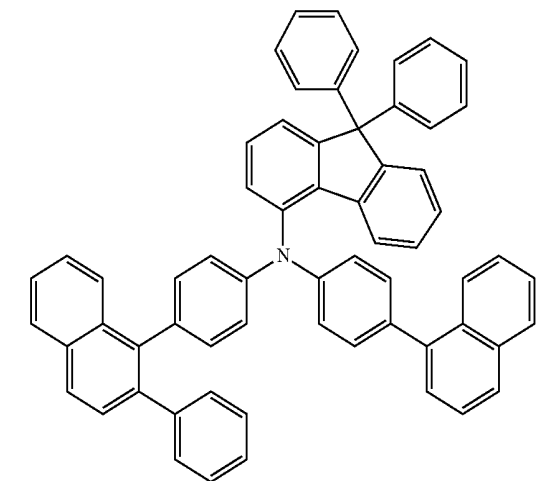


-continued

126

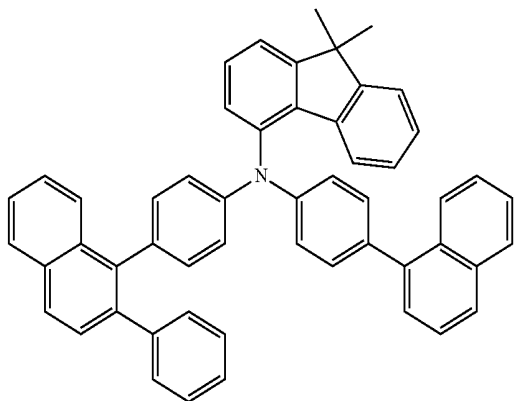


-continued


129

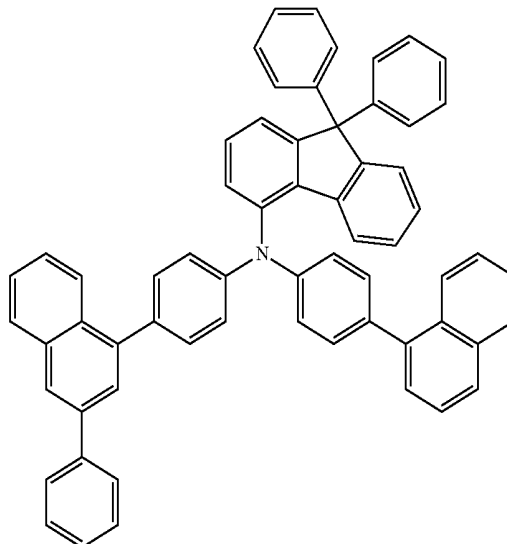


127

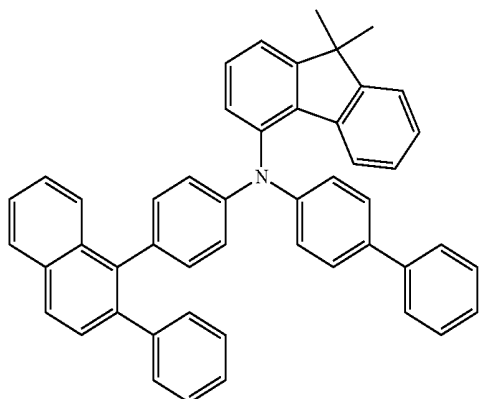


130

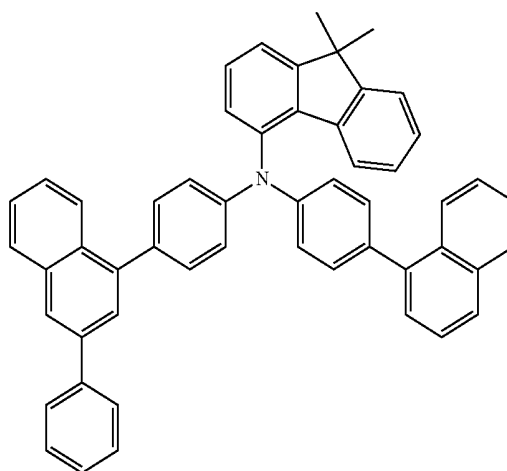

128

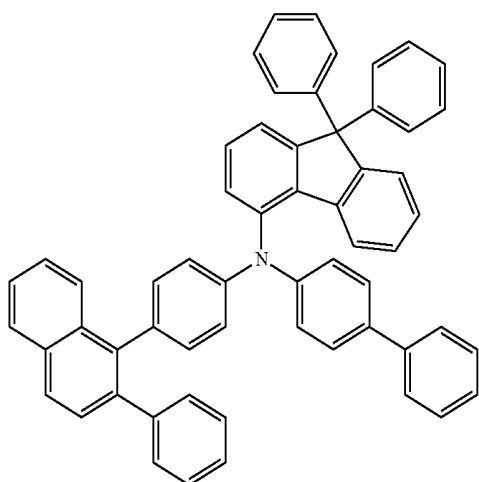


131

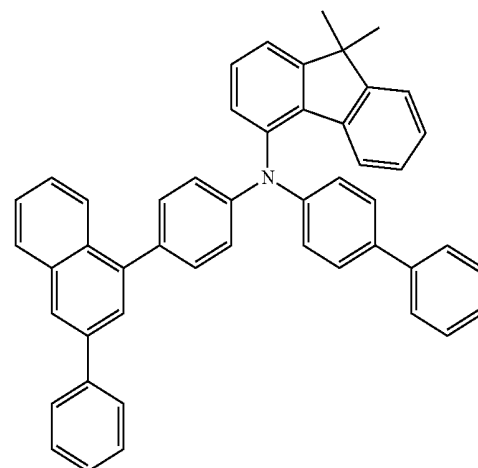


-continued

132

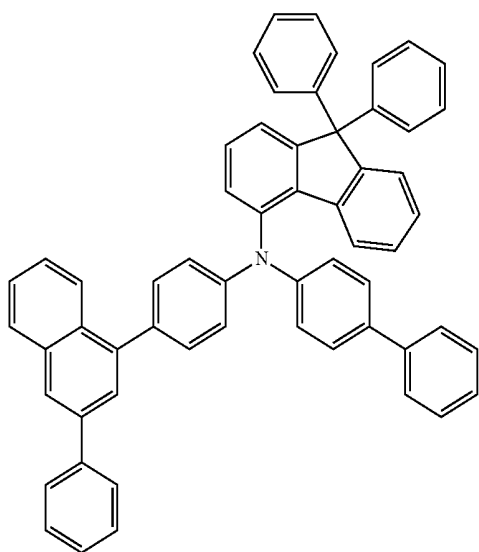


-continued

135

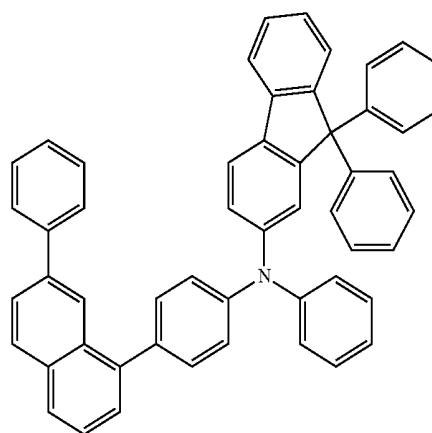


136

133

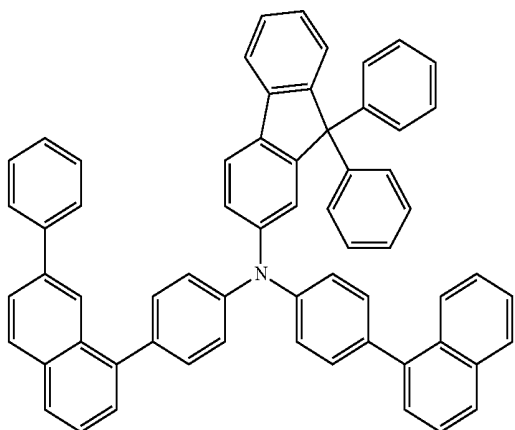


-continued


137

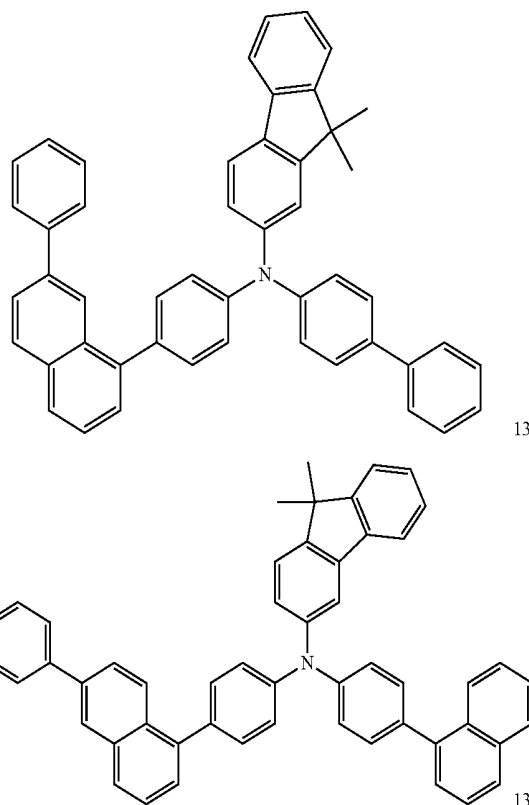

134

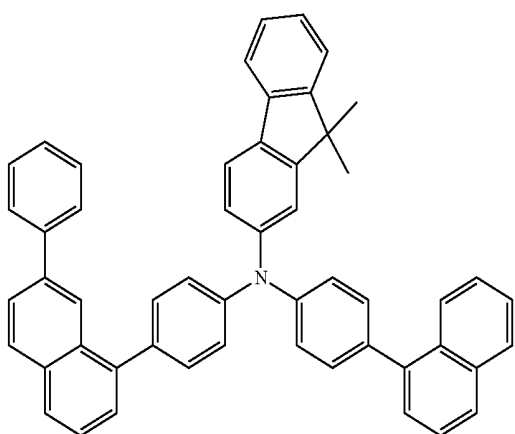


138

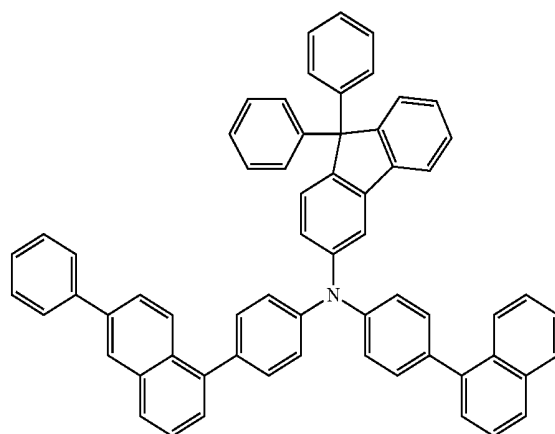


-continued


139

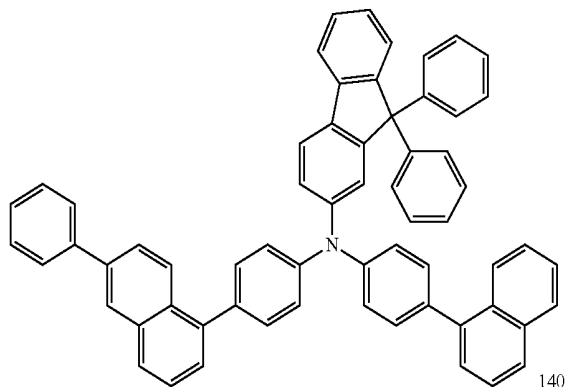


140

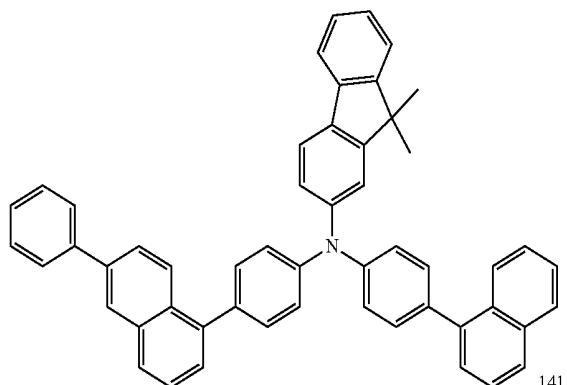

141

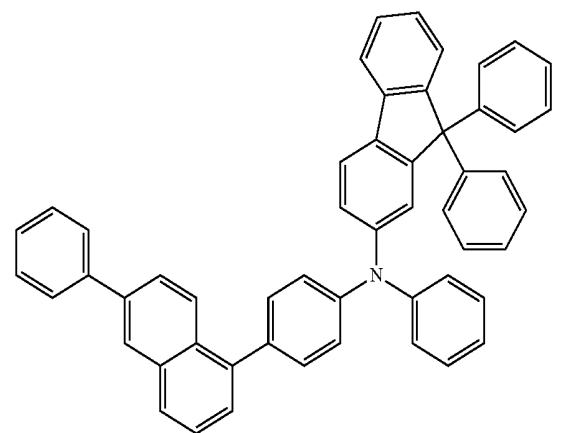


142

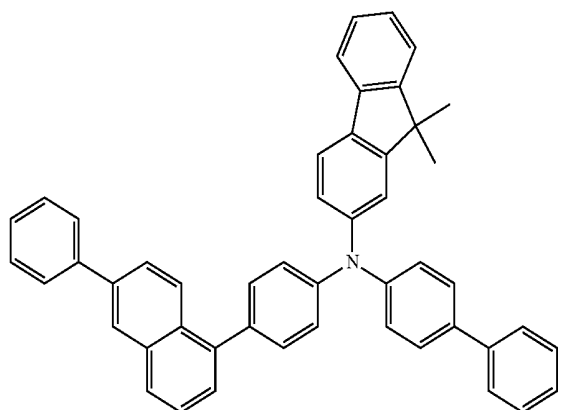


-continued


143

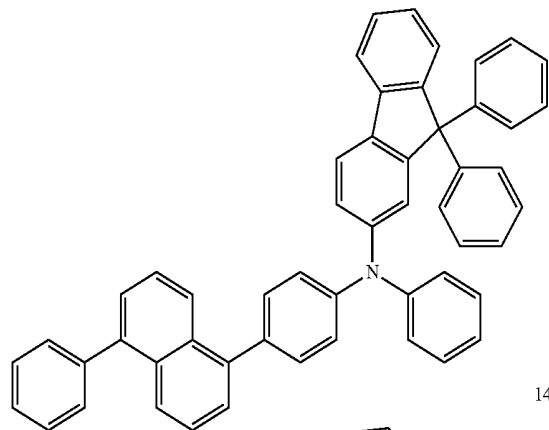


144

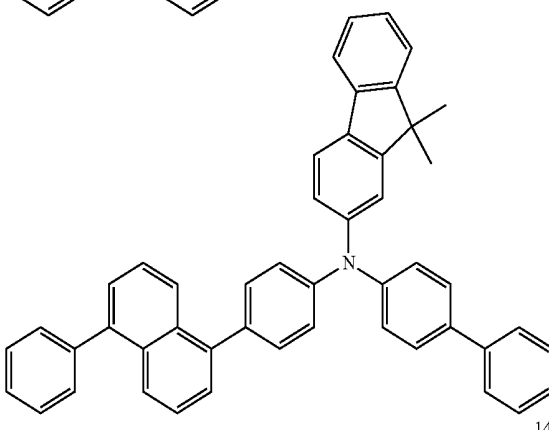

145

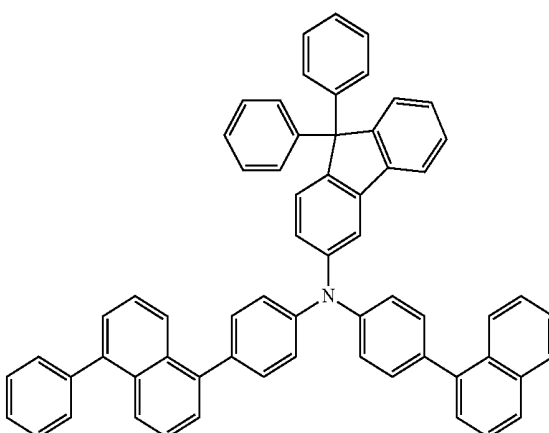


146

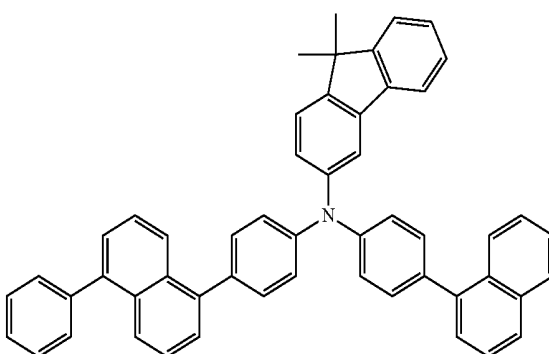

-continued


147

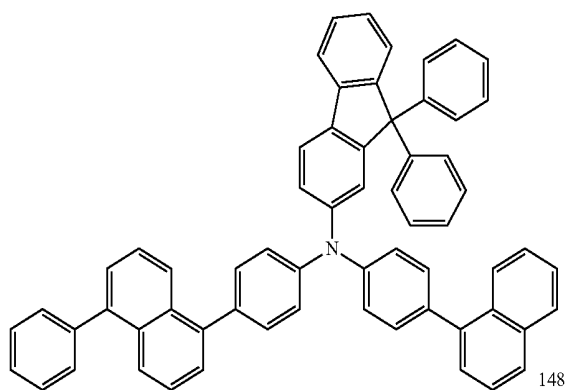


148

-continued


151

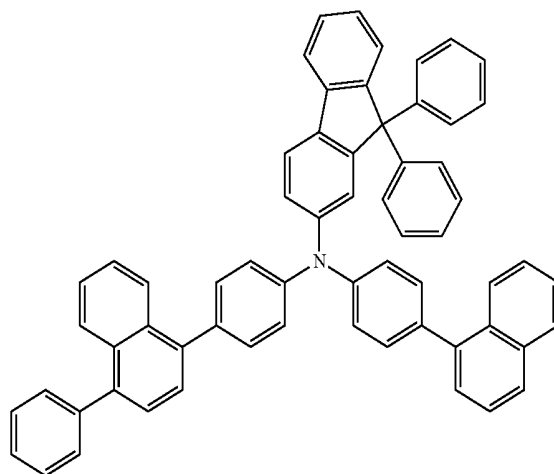


152

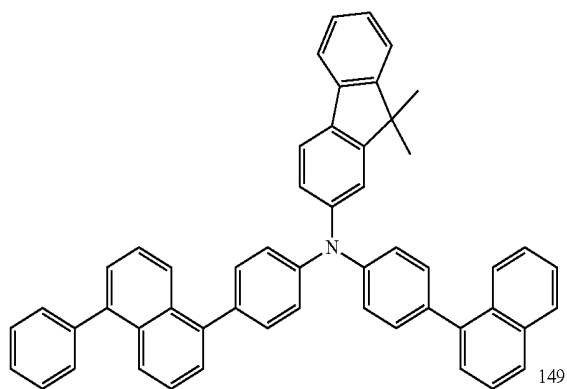



149

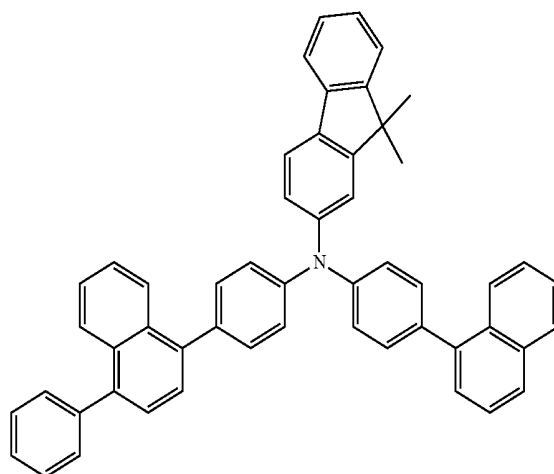

150

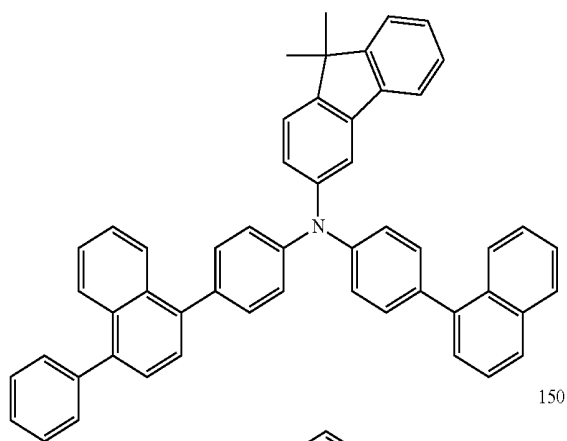


153

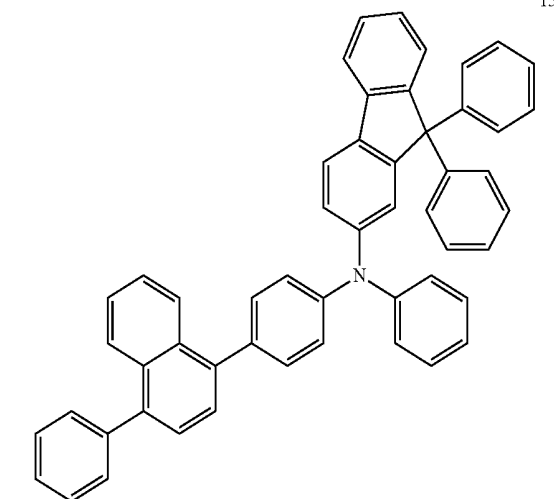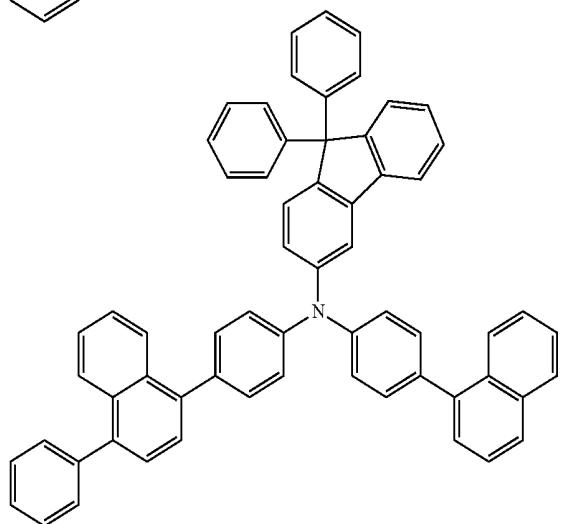


-continued


154

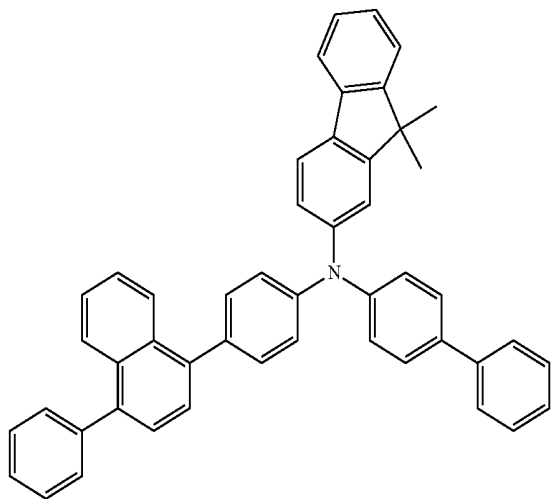

155

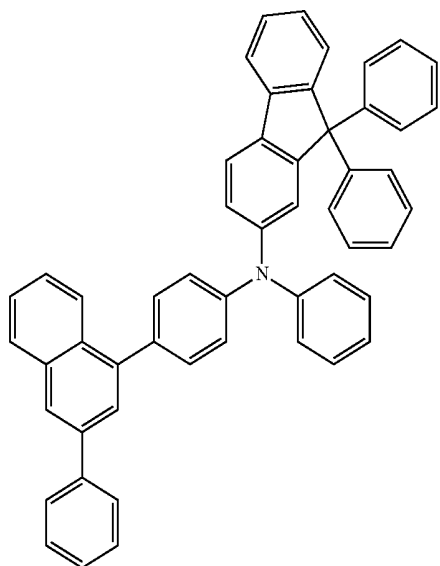


156

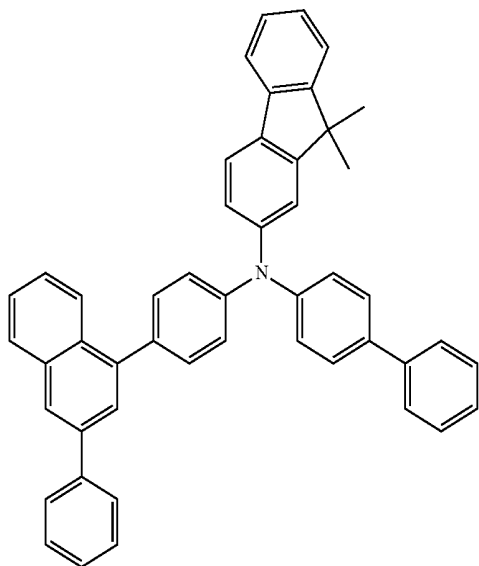


-continued


157

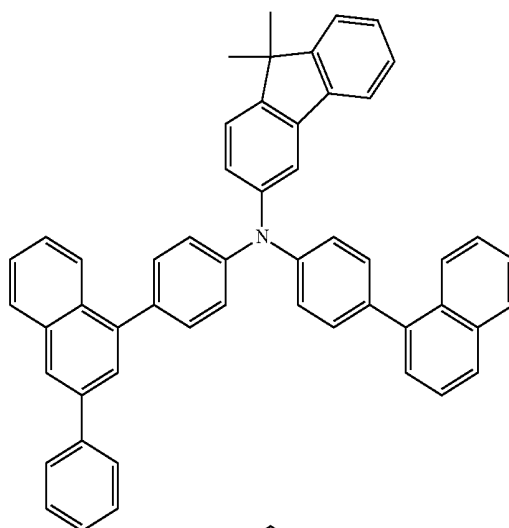

158

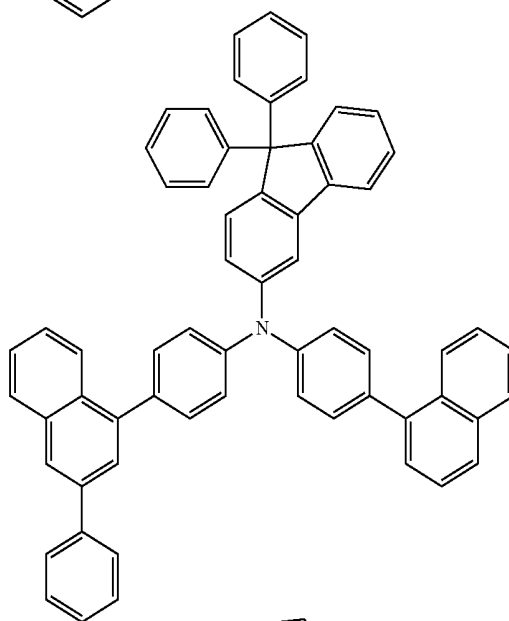


159

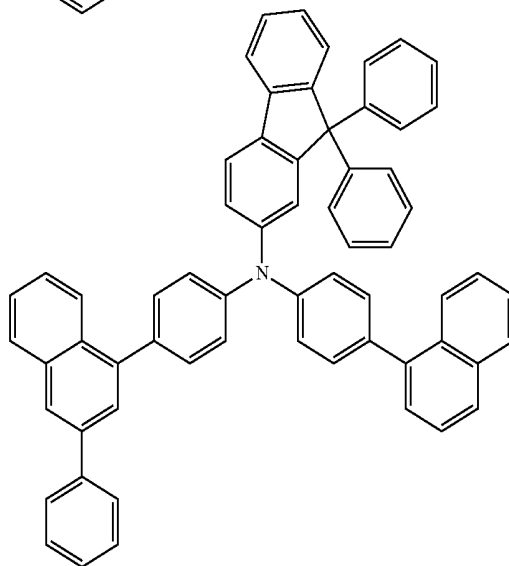


-continued

160

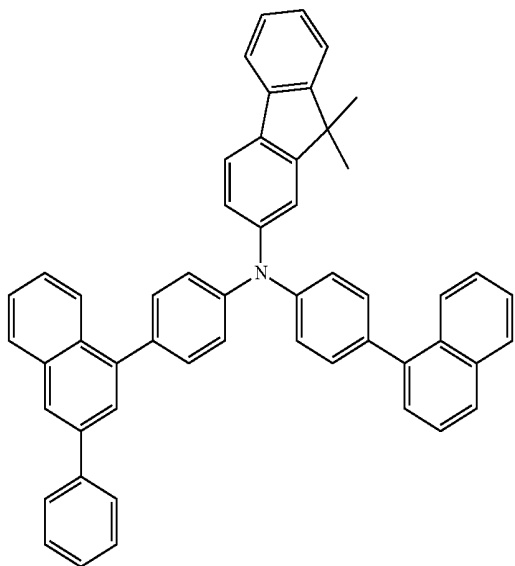


-continued


163

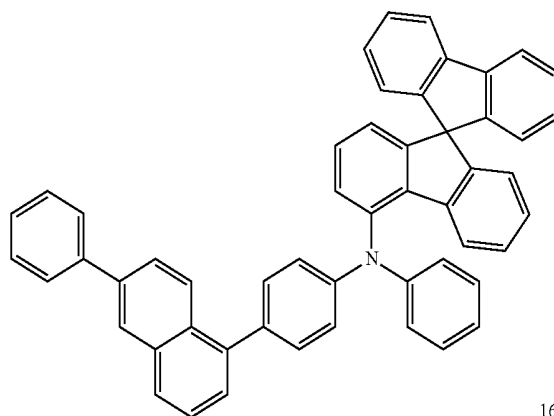


164

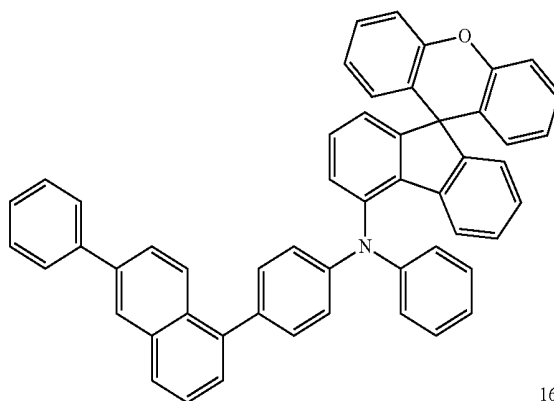


161

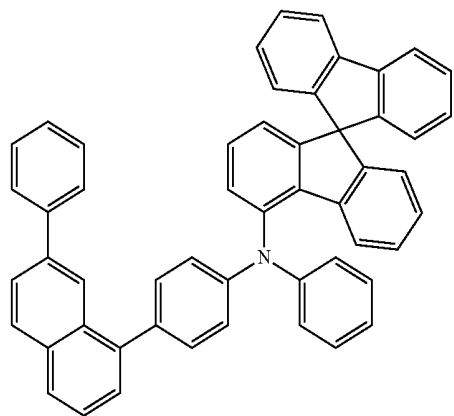


165

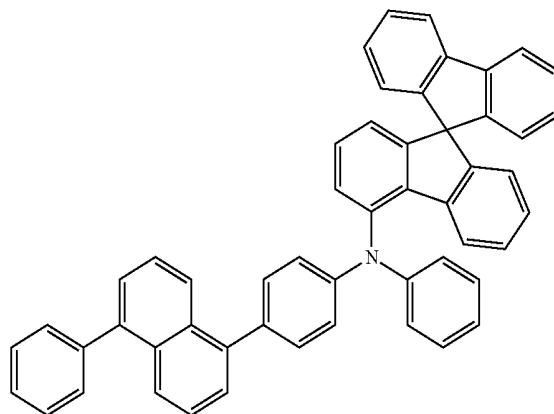

162

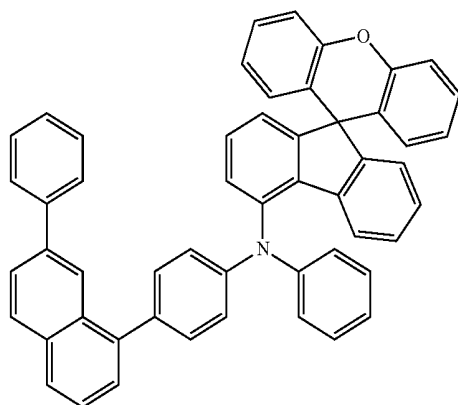


166

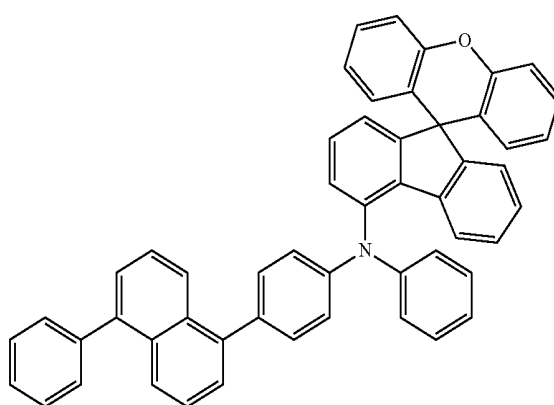


-continued


167

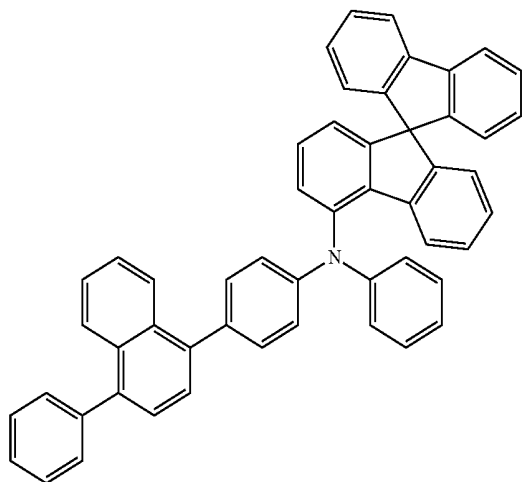

168

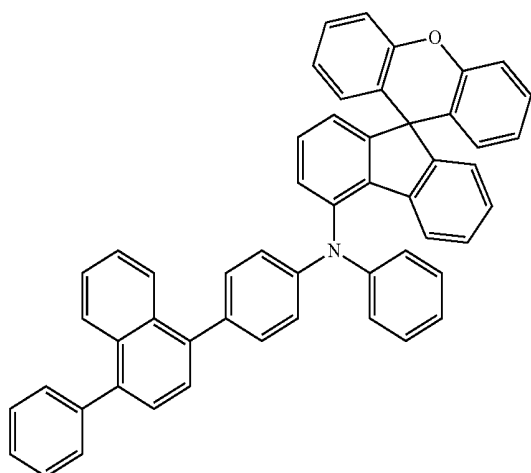


169

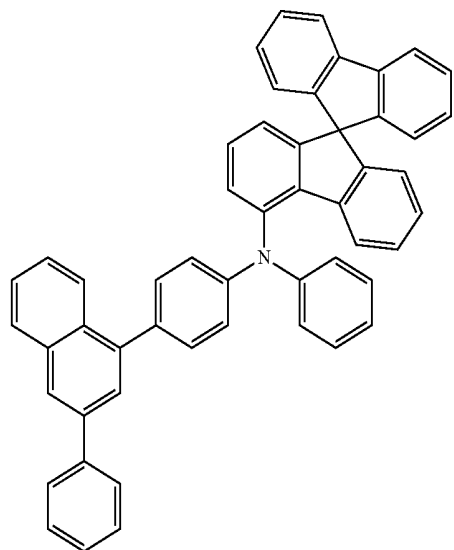


-continued


170

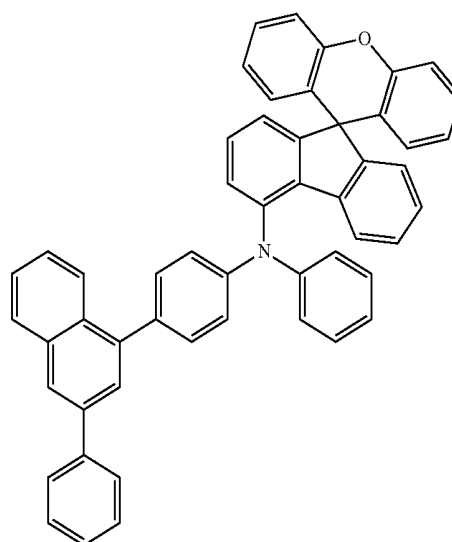


171

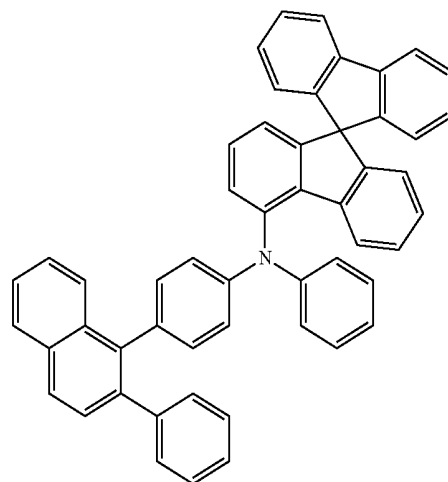

172

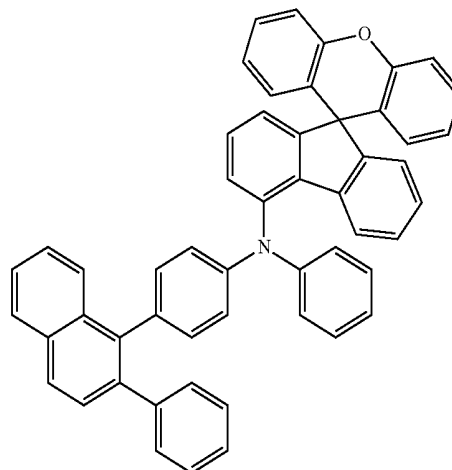


-continued

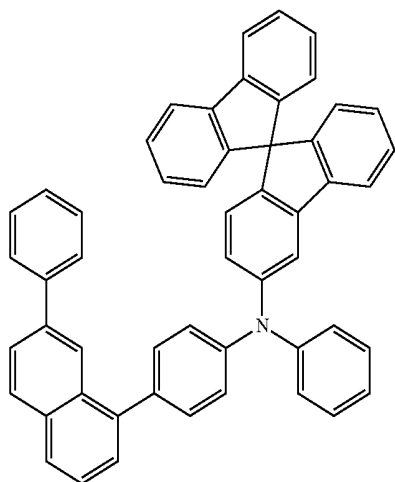


173


-continued

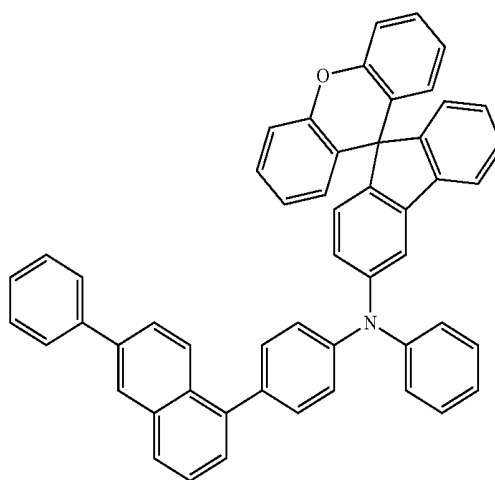


176

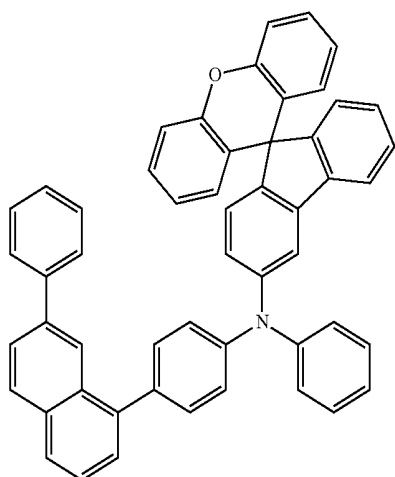


174

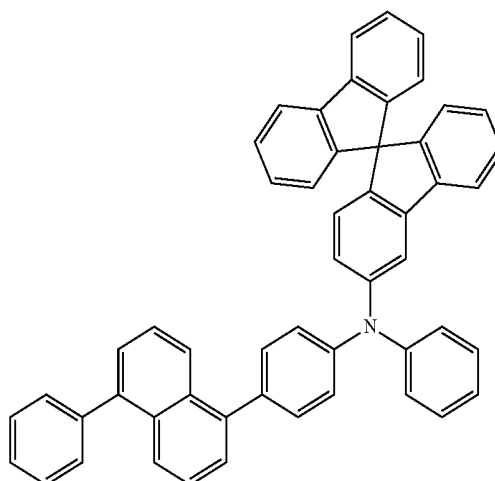

177



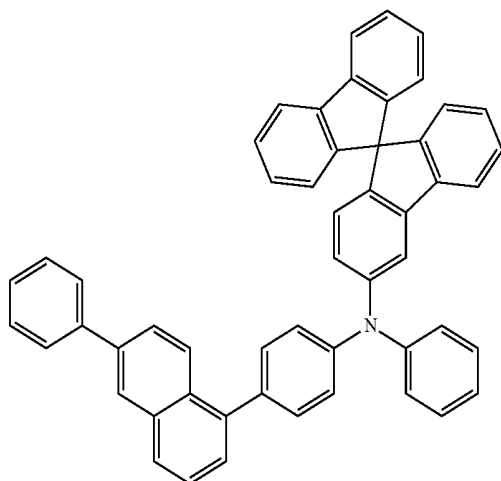


175



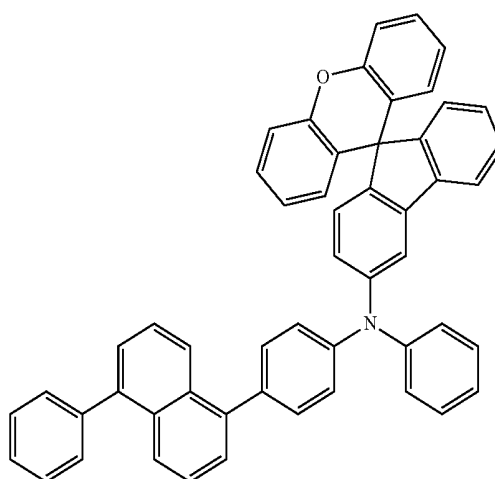


178

-continued

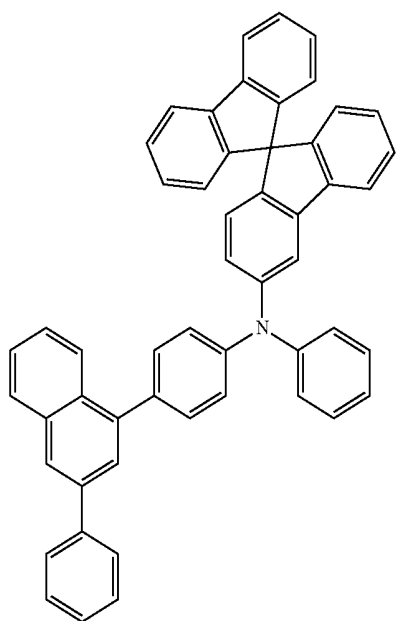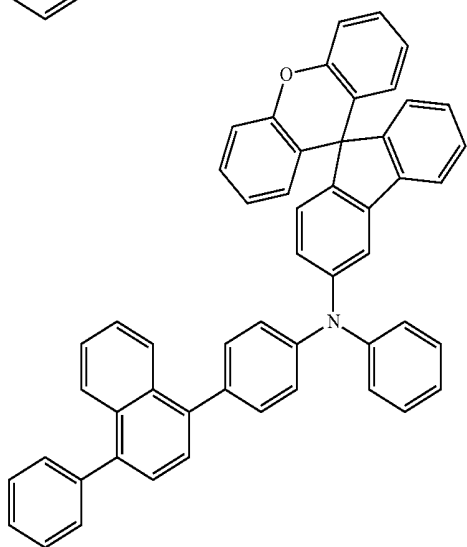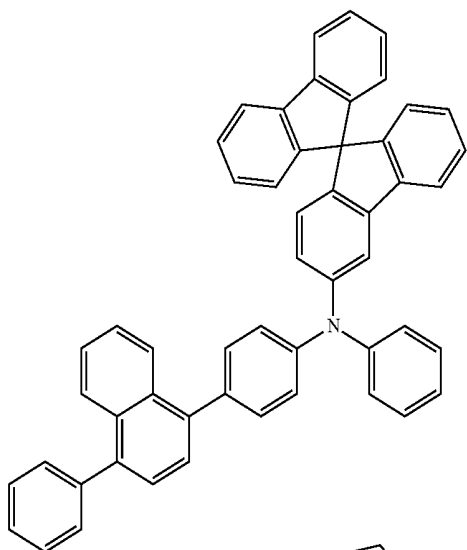


-continued

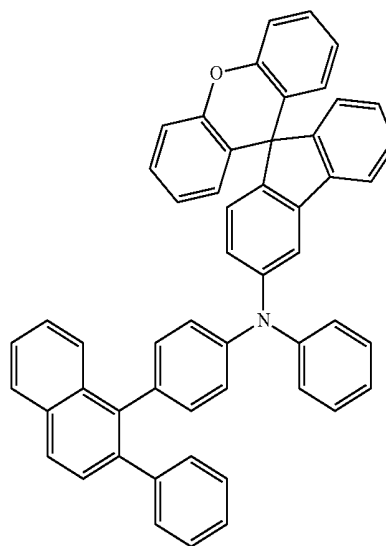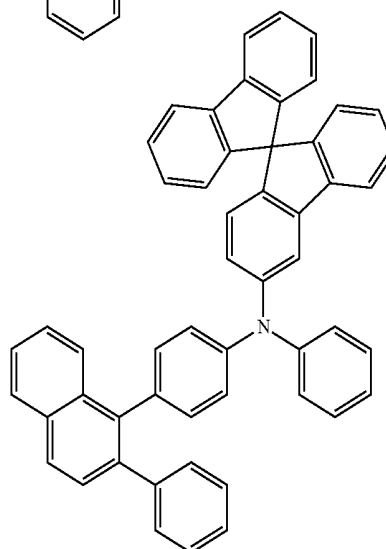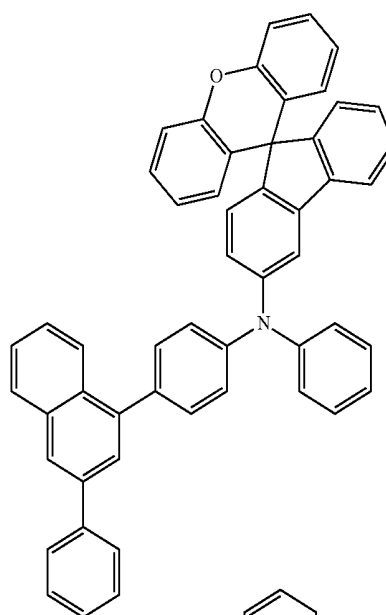


-continued

185

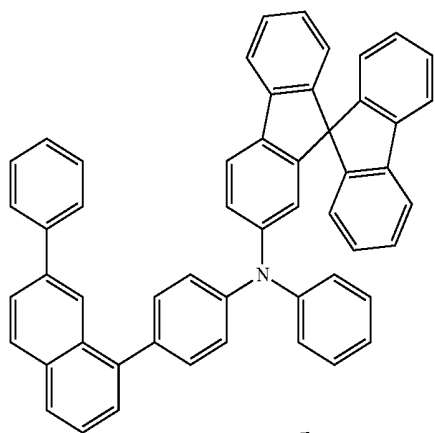


-continued


189

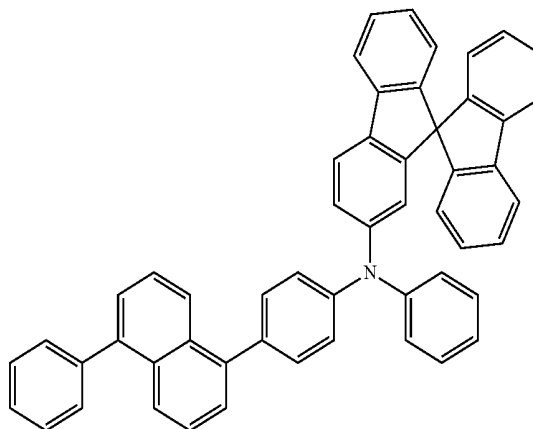


186

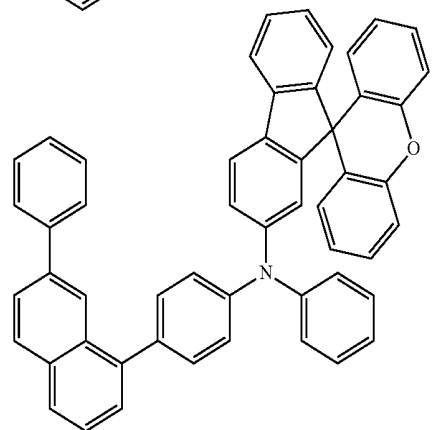


190

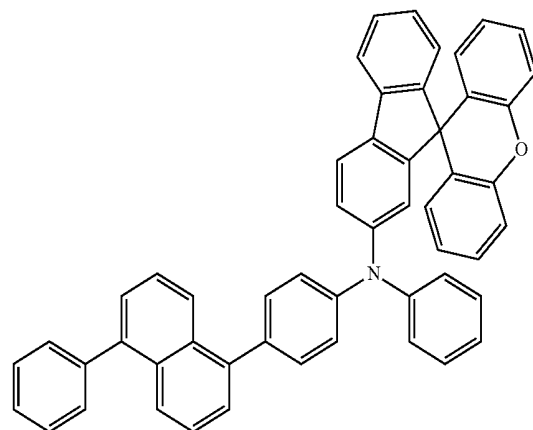


187

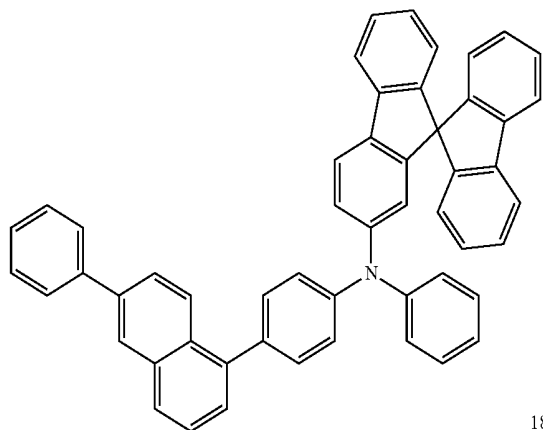




191

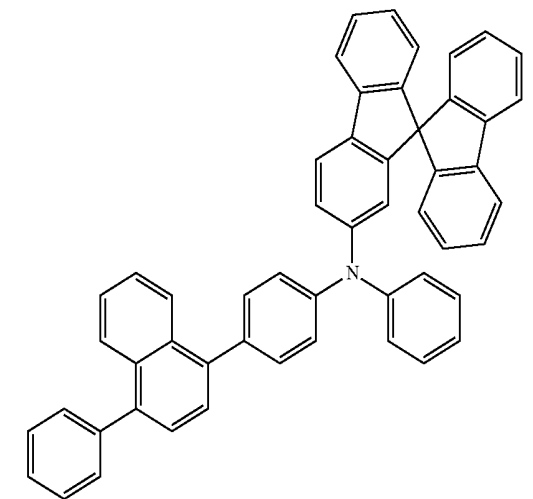





188

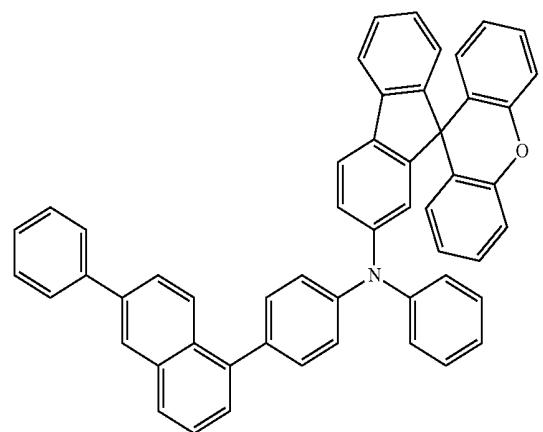

-continued

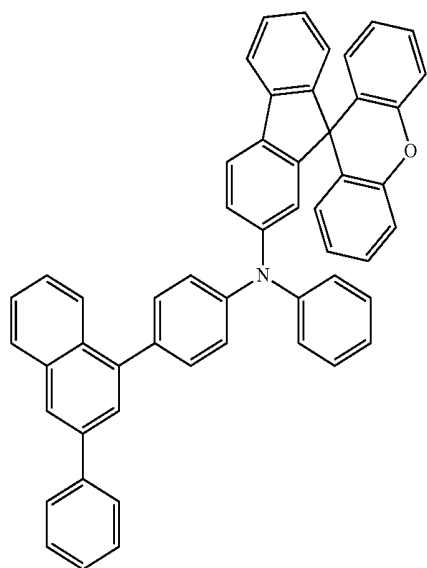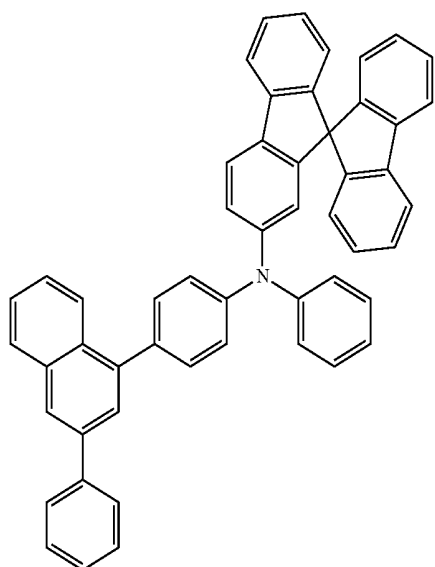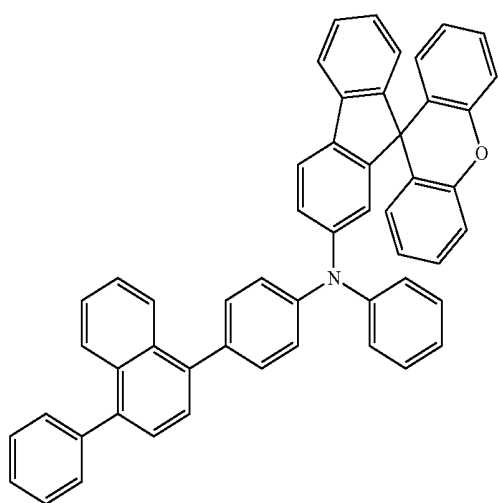


-continued

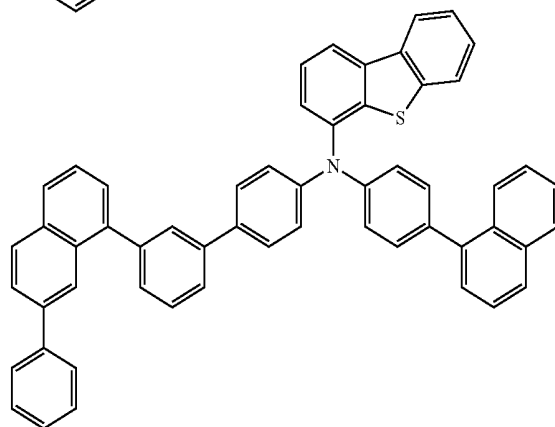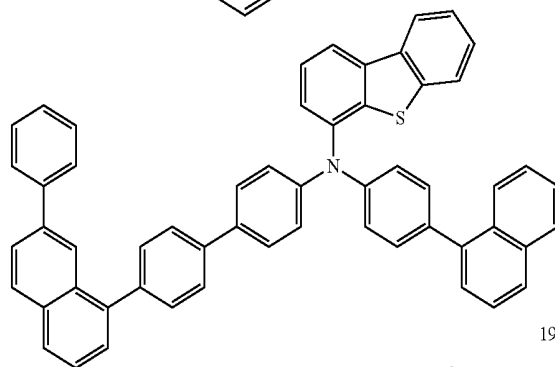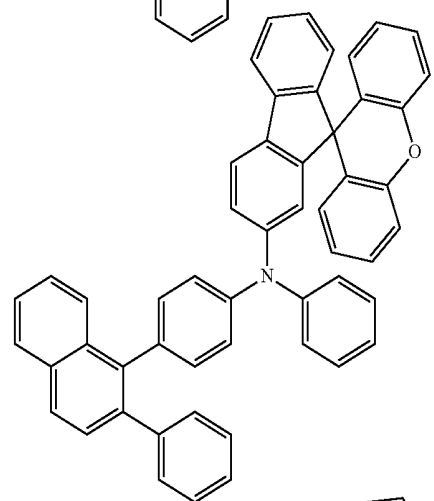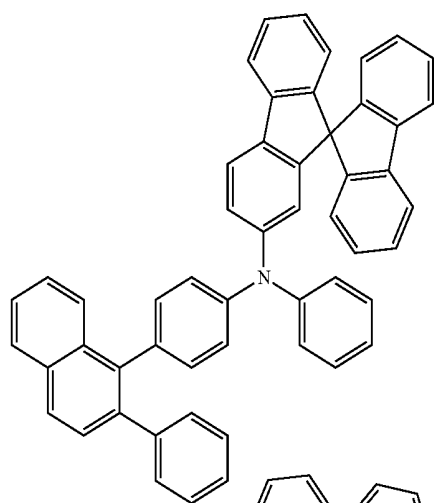


-continued


199

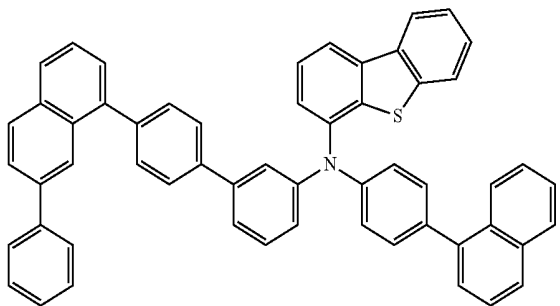


200

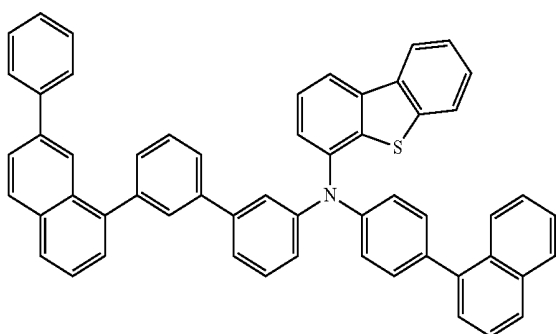

201

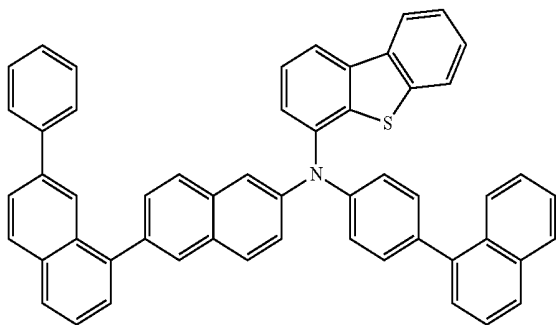


202

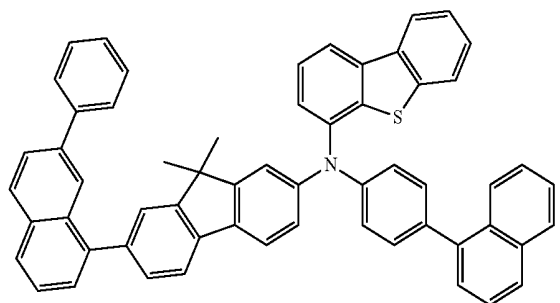


-continued


203

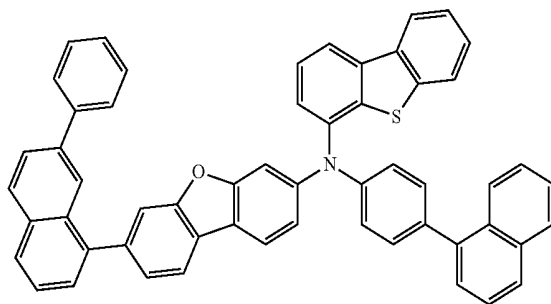


204

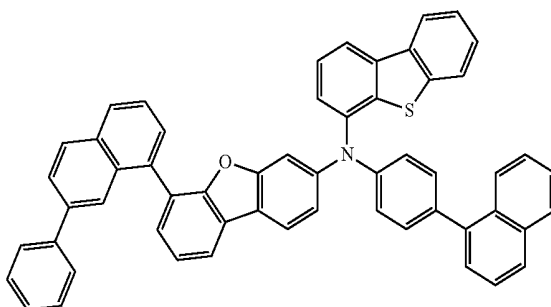

205

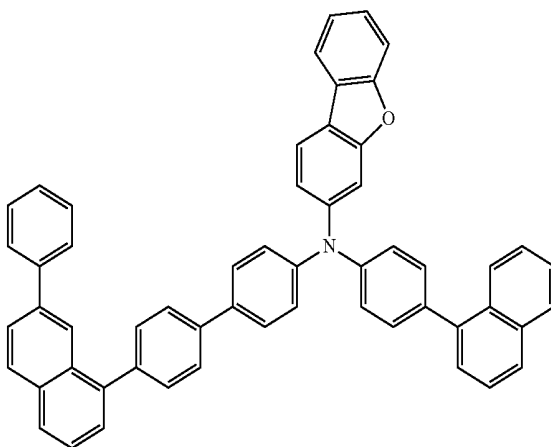


206

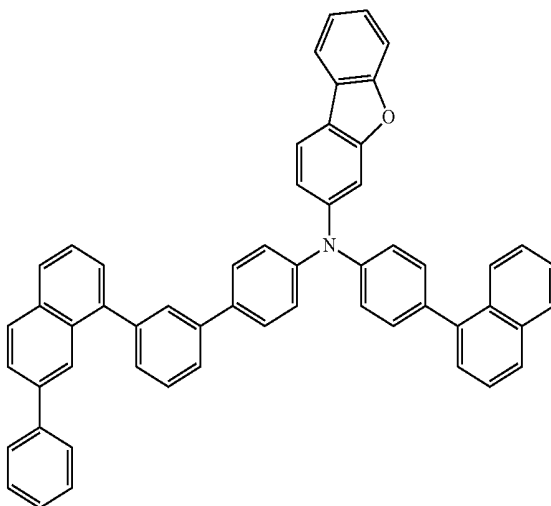


-continued


207

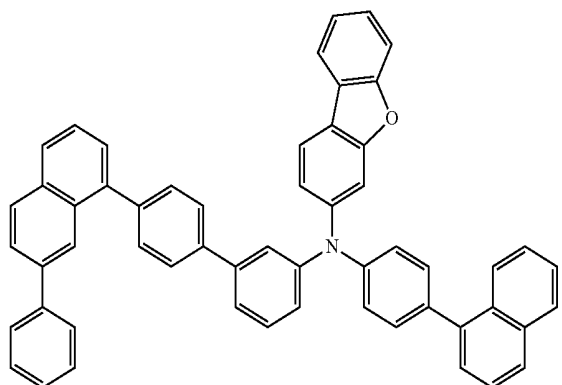

208

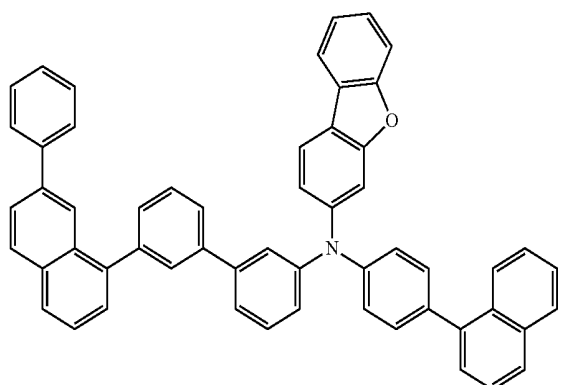


209

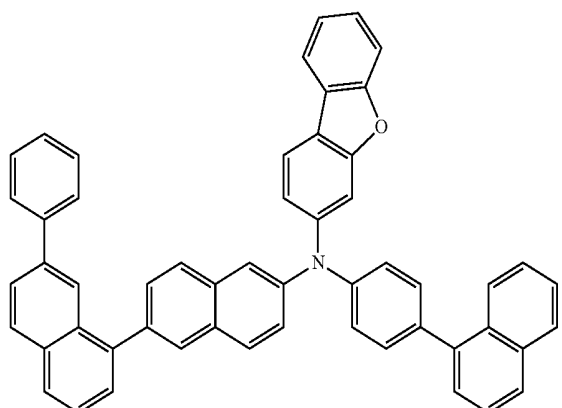


-continued


210

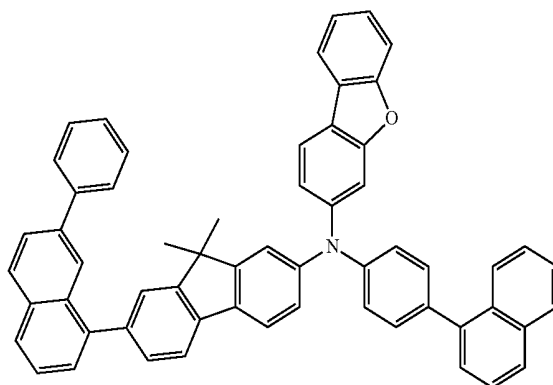

211

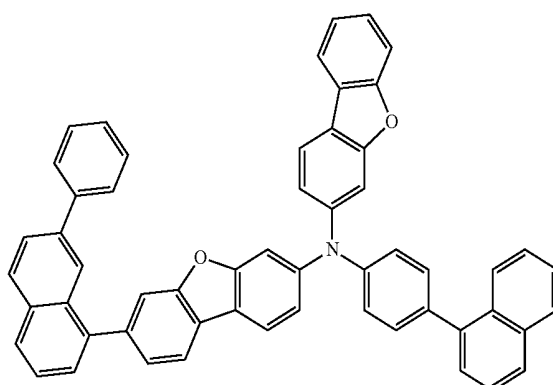

212

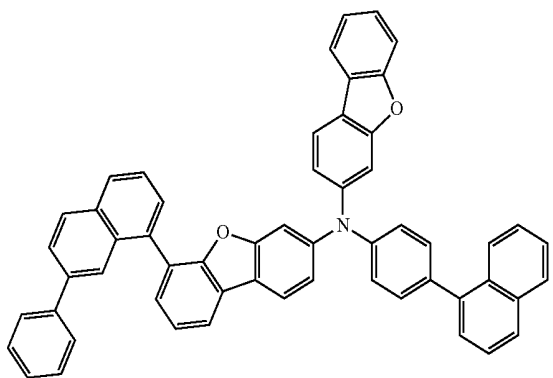

* * * * *

专利名称(译)	有机电致发光器件和用于有机电致发光器件的单胺化合物		
公开(公告)号	US20190237676A1	公开(公告)日	2019-08-01
申请号	US16/254777	申请日	2019-01-23
[标]申请(专利权)人(译)	三星显示有限公司		
申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
当前申请(专利权)人(译)	三星DISPLAY CO. , LTD.		
[标]发明人	MIYAKE HIDEO UENO MASATSUGU JIN XIULAN TAKADA ICHINORI UNO TAKUYA ITOI HIROAKI		
发明人	MIYAKE, HIDEO UENO, MASATSUGU JIN, XIULAN TAKADA, ICHINORI UNO, TAKUYA ITOI, HIROAKI		
IPC分类号	H01L51/00 C07D333/76 C09K11/06 C07D307/91 C07C211/61 C07D409/12		
CPC分类号	H01L51/0061 C07D333/76 C09K11/06 H01L51/006 C07D307/91 C07C211/61 C07D409/12 H01L51/5056 H01L51/5088 H01L51/5096 H01L51/5072 H01L51/5092 H01L51/5012 C09K2211/1018 H01L51/0058 H01L51/0074 H01L51/0073 H01L51/0052 C09K2211/1014 C09K2211/1011 C09K2211/1007 C07C2603/18 C07C2603/97 H01L51/0056 C07C2603/94 C07D311/96 C09K2211/1088 C09K2211/1092 C07D407/12 C07C211/54 H01L51/0072		
优先权	1020180009993 2018-01-26 KR 1020180143745 2018-11-20 KR		
外部链接	Espacenet USPTO		

摘要(译)

有机电致发光器件包括第一电极，第一电极上的空穴传输区域，空穴传输区域上的发光层，发光层上的电子传输区域和电子传输区域上的第二电极。空穴传输区域包括由下式1表示的单胺化合物：## STR00001 ##

