



US 20170247037A1

(19) **United States**

(12) **Patent Application Publication**
Basir et al.

(10) **Pub. No.: US 2017/0247037 A1**
(43) **Pub. Date: Aug. 31, 2017**

(54) **DRIVER READINESS AND INTEGRATED PERFORMANCE ASSESSMENT**

A61B 5/053 (2006.01)
A61B 5/145 (2006.01)
B60W 50/00 (2006.01)
G06Q 40/08 (2006.01)
A61B 5/024 (2006.01)

(71) Applicant: **IMS SOLUTIONS, INC.**, Schaumburg, IL (US)

(52) **U.S. Cl.**
CPC *B60W 40/08* (2013.01); *G06Q 40/08* (2013.01); *G09B 19/167* (2013.01); *G09B 19/14* (2013.01); *A61B 5/18* (2013.01); *A61B 5/024* (2013.01); *A61B 5/6802* (2013.01); *A61B 5/4806* (2013.01); *A61B 5/0531* (2013.01); *A61B 5/14532* (2013.01); *B60W 50/0097* (2013.01); *B60W 40/06* (2013.01); *B60W 2040/0827* (2013.01); *B60W 2040/0836* (2013.01); *B60W 2050/0077* (2013.01); *B60W 2420/42* (2013.01); *B60W 2520/105* (2013.01); *B60W 2520/125* (2013.01); *B60W 2540/22* (2013.01); *B60W 2040/0872* (2013.01); *B60W 2540/26* (2013.01); *B60W 2540/24* (2013.01); *B60W 2550/12* (2013.01); *B60W 2550/14* (2013.01); *B60W 2550/408* (2013.01); *B60W 2750/40* (2013.01)

(72) Inventors: **Otman A. Basir**, Waterloo (CA);
William Ben Miners, Guelph (CA);
Jason Toonstra, Elmira (CA)

(21) Appl. No.: **15/507,540**

(22) PCT Filed: **Aug. 31, 2015**

(86) PCT No.: **PCT/US2015/047740**

§ 371 (c)(1),

(2) Date: **Feb. 28, 2017**

Related U.S. Application Data


(60) Provisional application No. 62/043,839, filed on Aug. 29, 2014.

Publication Classification

(51) **Int. Cl.**
B60W 40/08 (2006.01)
G09B 19/16 (2006.01)
G09B 19/14 (2006.01)
A61B 5/18 (2006.01)
B60W 40/06 (2006.01)
A61B 5/00 (2006.01)

(57) **ABSTRACT**

A driver assessment system includes at least one vehicle sensor on a vehicle gathering vehicle dynamics information. At least one occupant sensor gathers driver information. The at least one occupant sensor may be a wearable device or subdermal device on the driver. At least one computer receives the vehicle dynamics information and the driver information to determine a driver readiness.

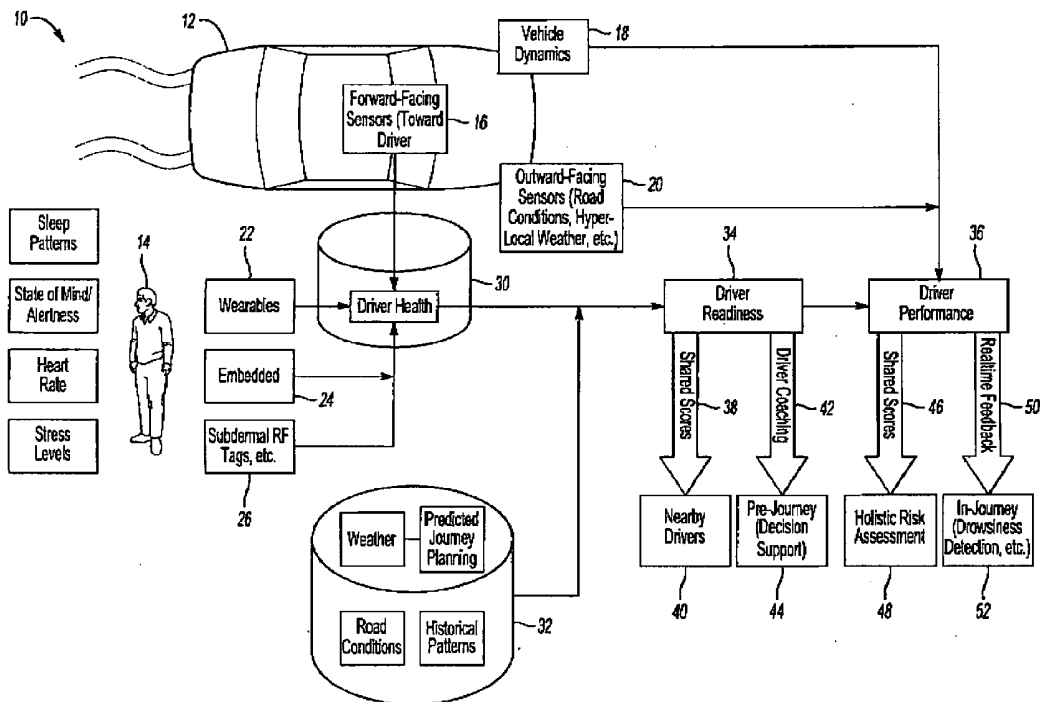

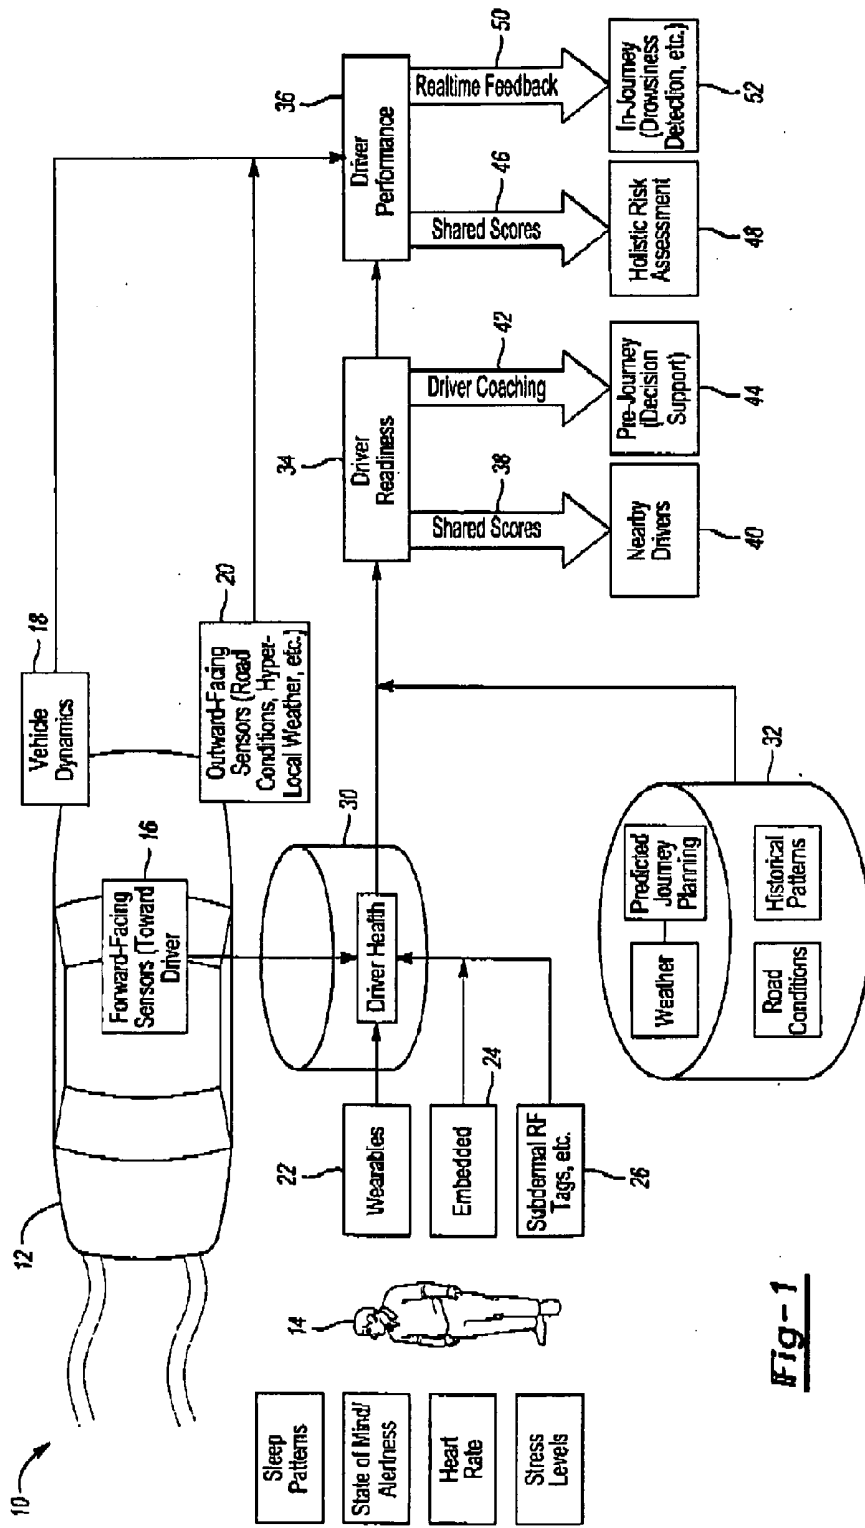


Fig-1

DRIVER READINESS AND INTEGRATED PERFORMANCE ASSESSMENT

BACKGROUND

[0001] Traditional vehicle safety systems focus on vehicle health and the operational status of key components including steering, engine temperature, and electronic stability control. In recent vehicles, these safety systems extend beyond the vehicle to include proximity detection for parking aids, adaptive cruise control, and driver assisted braking, steering, and parking features. While these systems are valuable to detect failures and hazardous conditions, they have very limited information about the health of the person behind the wheel beyond select systems that assess driver focus from gaze.

[0002] Assessing and understanding the health of the person behind the wheel is just as important, if not more important than monitoring the health of the vehicle itself. With a proper understanding of the health of the driver, the driver can be notified before the journey begins about potential risks to ensure they make informed decisions, the vehicle can help compensate or engage fail-safe measures when the driver becomes drowsy, distracted, or unfocused, and effective measures can be taken to reduce incidents caused by driver error.

SUMMARY

[0003] A driver assessment system includes at least one vehicle sensor on a vehicle gathering vehicle dynamics information. At least one occupant sensor gathers driver information. The at least one occupant sensor may be a wearable device or subdermal device on the driver. At least one computer receives the vehicle dynamics information and the driver information to determine a driver readiness.

BRIEF DESCRIPTION OF THE DRAWINGS

[0004] FIG. 1 is a schematic of a driver readiness and integrated performance assessment system according to one embodiment.

DETAILED DESCRIPTION

[0005] A driver readiness and integrated performance assessment system 10 is shown schematically in FIG. 1. The system 10 is integrated with a vehicle 12 to be driven by driver 14. Inward-directed sensors 16 (that is, directed toward the driver 14) are installed in the vehicle 12. The inward-directed sensors 16 may include heart rate sensors, skin conductivity sensors, olfactory sensors, etc. The system 10 further includes vehicle dynamics sensors 18 installed on the vehicle 12, such as gps, speed sensor, accelerometers, and any information available on on-board data bus, such as via an OBDII port. Vehicle dynamics includes speed, acceleration (lateral as well as longitudinal, including rate of acceleration/deceleration, rate of lateral acceleration, etc). Outward-directed sensors 20 may also be installed on the vehicle 12, such as road condition sensors, externally-facing cameras, microphones, hyper-local weather sensors, etc.

[0006] The system 10 may further include wearable sensors 22, such as watches or wristbands with vibro/tactile sensors, heart rate sensors, etc, such as Fitbit® or Apple Watch or the like. The system 10 may further include embedded human technologies 24, including pacemakers

with wireless access. The system may further include subdermal devices 26, such as RF tags, etc.

[0007] An on-board device 30 includes a computer having a processor and memory and/or storage, wireless communication circuitry (e.g. cell phone/4GLT connection or the like), local wireless connectivity (e.g. Bluetooth). The on-board device 30 receives information from the inward-directed sensors 16, vehicle dynamics sensors 18, the outward-directed sensors 20, the wearable sensors 22, embedded human technologies 24, subdermal devices 26 via the local wireless connectivity. The on-board device 30 receives (or can determine) sleep patterns, state of mind/alertness, heart rate and stress levels of the driver 14 from the wearable sensors 22, embedded human technologies 24 and subdermal devices 26.

[0008] The on-board device 30 also receives external information from external servers (computers with processors, memory and storage) that supply weather, predicted journey planning, road conditions, historical patterns of the driver, etc.

[0009] The on-board device 30 uses all of this information to determine driver readiness 34. Driver readiness 34 may be shared with nearby drivers 40 (via wifi or the internet or via the server 32). The driver readiness 34 may also factor into driver coaching 42. The driver readiness 34 in combination with the vehicle dynamics information from vehicle dynamics sensors 18 can be used by the on-board device 30 to create shared scores 46 that factor into holistic risk assessment 48 (such as for calculating insurance rates). The driver readiness 34 in combination with the vehicle dynamics information from vehicle dynamics sensors 18 can also be used by the on-board device 30 to give realtime feedback 50 to the driver 14 in-journey 52 (for example, to give wake-up alerts to the driver 14 based upon a detection of drowsiness of the driver 14).

[0010] The disclosed system 10 and method leverage driver health and lifestyle behavior with contextual information and predicted and current travel plans to prepare the driver 14 for their journey, inform the driver 14 to help influence smart decisions, and deliver a holistic solution to driver and transportation safety.

[0011] Holistic Lifestyle Assessment: Driver lifestyle is monitored to assess current state of mind, level of alertness, focus, and/or predict state of mind throughout future journeys. This monitoring aspect is important to help determine underlying characteristics of the driver 14 that may not be immediately externally observable, but still contribute to driver 14 decision-making processes. Elements of driver 14 lifestyle assessed include but are not limited to:

[0012] Sleep patterns—did the driver get sufficient sleep recently?

[0013] Dietary habits—is the driver consuming a well-balanced diet? Are their blood-sugar levels within a good range?

[0014] Stress levels—is the driver experiencing abnormal levels of stress?

[0015] Exercise patterns—is the driver in good physical condition?

[0016] Social interaction—does the driver maintain healthy relationships? Are there psychological implications that need to be considered?

[0017] Integrated Human Health Sensing: Integration with wearable devices 22 and/or subdermal technologies 26 provides an existing channel to gather health and performance

information through from body-equipped sensors. This information is combined with information gathered from the use and movement of portable devices (e.g. cell phones or smart phones when in pockets, etc.), vehicle-equipped sensors (built-in, or aftermarket), and external sensors to derive a comprehensive representation the driver's health at any point in time. Some of these measured items include:

[0018] Measurement of heart rate to detect anomalous heart rate conditions. For example, sudden changes, or very low heart rates indicative of a drowsy driver. Near misses, or near accidents can also cause sudden changes in the driver's heart rate but may not be easily detected based on vehicle dynamics or other factors. The on-board device **30** may ignore sudden changes in the driver's heart rate that appear to have been caused by a near-accident, as evidenced by the vehicle dynamics sensors **18**.

[0019] Blood-sugar levels, as determined by the wearable devices **22** or subdermal devices **26** can assess dietary health and chemical balance

[0020] Sleep patterns, and changes or anomalies in sleep patterns, are an input from the wearable devices **22** or subdermal devices **26** to determine or predict driver alertness.

[0021] Passive or active blood-alcohol measurements from the wearable devices **22** or subdermal devices **26** are input to the on-board device **30**.

[0022] Olfactory sensors—when was the last time the driver had a shower? Poor personal hygiene can be an indicator of a poor mental and/or poor physical state of the driver **14**.

[0023] Skin conductivity, as determined by wearable devices **22** or subdermal devices **26** or inward-looking sensors **16**, can be used a proxy for stress levels. The stress level of the driver **14** is a factor considered by the on-board device **30**.

[0024] Automatic identification chip measurement (i.e. Pet RFID tags) are read by inward-directed sensors **16** to determine who, how many or what (i.e. pets) are in the vehicle **12**.

[0025] Embedded human technologies **24** include pace-makers with wireless access.

[0026] Proactive Driver Feedback: The system **10** employs flexible feedback and alerting mechanisms that employ configurable and/or trainable escalation paths that can occur concurrently, or sequentially with optional conditions on specific activities. Examples include minimizing the duration of time in which the driver **14** is drowsy by using initial feedback in a vibro/tactile manner on a wrist-band or other wearable device **22**. If the driver continues to exhibit drowsy symptoms, the vehicle **12** can be configured to escalate this feedback in an audible manner, followed by applying vibrational feedback from the seat itself, or even climate control feedback to adjust the environment in an effort to improve driver focus. Some of the triggers available in the escalation paths include:

[0027] Use of vibro/tactile feedback using wearable technologies **22**.

[0028] Use of steering wheel vibro/tactile feedback.

[0029] Contextually relevant audible or spoken feedback.

[0030] Delivery of feedback via text message, email, etc.

[0031] Voice call (optionally automated) to designated recipient(s).

[0032] Broadcasted messages via social media.

[0033] Internal climate adjustments.

[0034] Notification with a call center or public safety answering point (PSAP) for assistance.

[0035] Journey Prediction: The system **10** includes a prediction module to predict future journeys based on historical driving habits, time of day, location, dietary patterns, social interaction, and other behavioral cues in combination with driving behavior. Predicted future journey paths (including timing) are used to both prepare the vehicle **12** in anticipation of the driver's arrival (climate preconditioning, seat warming, etc.), and also to assess travel readiness given both the state of the driver **14**, and the impact of the predicted journey ahead. The driver's readiness for a short commute may be very different from the driver's readiness for a two day road trip.

[0036] Journey Planning: In this system **10**, journeys can be planned by incorporating driver **14** health information to optimize routes. This approach uses more than the traditional elements of distance, time, and fuel efficiency to also incorporate appropriate rest stops and paths to minimize overall driver risk and maintain a desired driver readiness score throughout one or more journeys.

[0037] Driver Readiness Score: Assessment of travel readiness using multiple cues including predicted hyper-local weather along the journey ahead, road conditions, state of charge or fuel level in the vehicle, and driver **14** state of mind and predicted state throughout the journey. Travel readiness is summarized into a score (a number from 0-100) with coaching guidance for the driver **14**. The driver **14** has the option to review individual contributing factors that roll into the overall readiness score. Driver **14** readiness information can be accessed on demand from any computer or mobile device, in addition to being pushed to the driver in an unsolicited manner when the system **10** determines that the driver **14** is getting ready for a journey (i.e. by approaching their vehicle, or based on historical behavioral patterns).

[0038] Shared Readiness and Accessibility: Information about driver **14** readiness can be exposed to nearby travelers. This level of transparency helps other travelers on the road avoid or drive more cautiously around a driver **14** with a low readiness score even before that driver **14** might exhibit symptoms. The aggregate set of driver **14** readiness scores for vehicles **12** on any given road segment can also be used to influence the expected risk level associated with driving through the given road segment.

[0039] Driver Risk Assessment: Since information about the driver's health and driving behavior is available in this system **10**, an overall risk assessment can be derived, beyond traditional driving risk assessments employed in recent usage-based-insurance programs. This approach involves ranking and/or scoring the driver **14** using an element of driving behavior, an element of demographics, and an element of health to derive a precise model for individual driver risk. This measure is important across many applications including combined health, life, and automotive insurance.

[0040] Enhanced Emergency Assistance and First Notice of Loss: Use of occupant health information to proactively inform first responders and emergency services personnel about the total occupants within the vehicle, their characteristics (male/female, child/adult, etc.), and health information that may be important to ensure sufficient medical equipment, blood, and other items are made available.

[0041] As an alternative, some or all of the information gathering, determinations, calculations and warnings could

be performed on the server **32** instead of on the on-board device **30**. Alternatively, some tasks could be performed by the on-board device **30** while others are performed on the server **32**.

[0042] In accordance with the provisions of the patent statutes and jurisprudence, exemplary configurations described above are considered to represent a preferred embodiment of the invention. However, it should be noted that the invention can be practiced otherwise than as specifically illustrated and described without departing from its spirit or scope.

What is claimed is:

1. A driver assessment system comprising:
 - at least one vehicle sensor on a vehicle gathering vehicle dynamics information;
 - at least one occupant sensor gathering driver information, wherein the at least one occupant sensor is a wearable device or subdermal device on the driver; and
 - at least one computer receiving the vehicle dynamics information and the driver information to determine a driver readiness.
2. The system of claim **1** further including at least one inward-directed sensor in the vehicle, the at least one computer receiving additional driver information from the inward-directed sensor.
3. The system of claim **1** wherein the at least one computer determines driver performance based upon the vehicle dynamics information and the driver information.
4. The system of claim **1** wherein the at least one computer determines driver readiness based upon an expected journey.
5. The system of claim **1** wherein the at least one computer determines driver readiness based upon heartbeat measured by the at least one occupant sensor.
6. The system of claim **1** wherein the at least one computer determines driver readiness based upon sleep patterns, as determined by the at least one occupant sensor.

7. The system of claim **1** wherein the at least one computer determines driver drowsiness based upon the driver information.

8. The system of claim **7** wherein the at least one computer determines driver drowsiness based upon heart rate from the at least one occupant sensor.

9. The system of claim **8** wherein the at least one computer transmits the driver readiness determination to nearby drivers in other vehicles.

10. The system of claim **1** wherein the driver readiness determination is transmitted to a server, the server compiling driver readiness determinations from a plurality of vehicles on a road segment including the vehicle and assessing a risk level on the road segment based upon the driver readiness determinations.

11. The system of claim **1** wherein the at least one computer implements proactive, escalating driver feedback based upon the driver readiness determination.

12. The system of claim **11** wherein the at least one computer determines driver drowsiness as part of the driver readiness determination.

13. The system of claim **11** wherein the driver feedback is given via vibro/tactile feedback on the occupant sensor and wherein the occupant sensor is a wearable device.

14. The system of claim **1** wherein the driver readiness information and vehicle dynamics information is used to determine a driver risk assessment for determining a rate of insurance.

15. A method for assessing driver readiness including the steps of:

- receiving driver information from at least one occupant sensor;
- receiving journey information regarding an expected journey, including a length of the expected journey; and
- determining driver readiness based upon the driver information in light of the length of the expected journey.

* * * * *

专利名称(译)	驾驶员准备和综合绩效评估		
公开(公告)号	US20170247037A1	公开(公告)日	2017-08-31
申请号	US15/507540	申请日	2015-08-31
[标]申请(专利权)人(译)	IMS解决方案		
申请(专利权)人(译)	IMS解决方案, 公司.		
当前申请(专利权)人(译)	IMS解决方案, 公司.		
[标]发明人	BASIR OTMAN A MINERS WILLIAM BEN TOONSTRA JASON		
发明人	BASIR, OTMAN A. MINERS, WILLIAM BEN TOONSTRA, JASON		
IPC分类号	B60W40/08 G09B19/16 G09B19/14 A61B5/18 B60W40/06 A61B5/00 A61B5/053 A61B5/145 B60W50/00 G06Q40/08 A61B5/024		
CPC分类号	B60W2550/14 B60W2040/0872 B60W2750/40 B60W2540/26 B60W2540/24 B60W2550/12 B60W40/08 G06Q40/08 G09B19/167 G09B19/14 A61B5/18 A61B5/024 A61B5/6802 A61B5/4806 A61B5/0531 A61B5/14532 B60W50/0097 B60W40/06 B60W2040/0827 B60W2040/0836 B60W2050/0077 B60W2420/42 B60W2520/105 B60W2520/125 B60W2540/22 B60W2550/408 B60K28/06 B60W2520/10 B60W2540/221 B60W2552/20 B60W2556/65 B60W2756/10 B60W2552/00 B60W2555/20		
优先权	62/043839 2014-08-29 US		
外部链接	Espacenet USPTO		

摘要(译)

驾驶员评估系统包括车辆上的至少一个车辆传感器，其收集车辆动态信息。至少一个乘员传感器收集驾驶员信息。至少一个乘员传感器可以是驾驶员上的可穿戴设备或皮下设备。至少一个计算机接收车辆动态信息和驾驶员信息以确定驾驶员准备状态。

