

(19)



(11)

EP 2 605 281 A1

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:

19.06.2013 Bulletin 2013/25

(51) Int Cl.:

H01L 27/32 (2006.01)

H04M 1/02 (2006.01)

(21) Application number: **11193969.0**

(22) Date of filing: **16.12.2011**

(84) Designated Contracting States:

**AL AT BE BG CH CY CZ DE DK EE ES FI FR GB
GR HR HU IE IS IT LI LT LU LV MC MK MT NL NO
PL PT RO RS SE SI SK SM TR**

Designated Extension States:

BA ME

(71) Applicant: **Intivation Holding B.v.**

1075 AT Amsterdam (NL)

(72) Inventors:

• **Osinga, Anne J.**

3235 AC Rockanje (NL)

• **Kardolus, Menno**

1115 DL Duivendrecht (NL)

• **Gröninger, Mark Alexander**

4904 SJ Oosterhout (NL)

(74) Representative: **Klavers, Cornelis**

Octrooibureau Klavers B.V.

Markerkant 1201.20

1314 AJ Almere (NL)

(54) **OLED display provided with solar cell means**

(57) It is described a device comprising a light translucent organic light emitting (OLED) display having a front side for displaying information, images and/or video and a back side, and solar cell means provided on the back side of the display. Sunlight shining through the display can then be converted to electric power. The solar cell means may be back connect solar cell means comprising a one sided evenly and uniformly coloured front side facing the back side of the OLED display and a back connect

side which is soldered to one side of a printed circuit board (PCB) whose opposite side is fastened to the housing of the device. Advantageously a smooth undisturbed background is visible through the display. The device is a portable or mobile device, a smart phone, an I-pad, an I-phone, an audio and/or video player, an mp3 or mp4 player, a tablet PC, a laptop, a navigation device for vehicles, such a for personal navigation, cars, ships, air planes and the like.

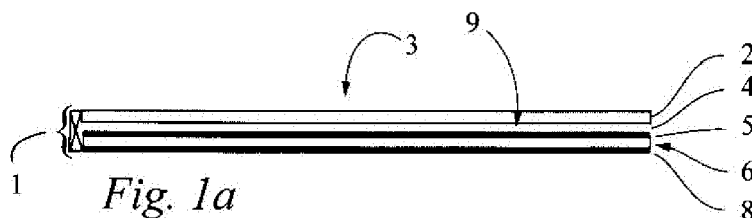


Fig. 1a

EP 2 605 281 A1

Description

[0001] The present invention relates to a device comprising a display having a front side for display of information, images and/or video, and having a back side.

[0002] Devices such as mobile devices for example mobile phones provided with displays used for displaying thereon information c.q. data, such as text, icons, images, video and the like are generally known. Solar powered devices having solar cells provided on the back of the housing of the device meant for charging an accumulator in the device are also known.

[0003] As the functionalities of these devices are increasing there is a ever growing demand for electric device power. If the device is provided with a display the housings device is normally turned upside down to allow solar cell means provided on the back side of the housing to receive solar energy, which activates solar charging.

[0004] It is an object of the present invention to provide an improved device having solar power charging capabilities, but not requiring special handling for activating solar charging.

[0005] Thereto the device according to the invention has the characterising features of claim 1.

[0006] It is an advantage of the device according to the present invention that the light translucent OLED display while continuing its normal way of functioning for the display of data and video can now also be used for passing on and letting through light, in particular sunlight, to underlying solar cell means provided on the back side of the display. The light energy reaching these solar cell means lying in the background protected by the display can advantageously be used to power the device instantly and/or for charging a rechargeable battery, capacitor or accumulator normally present in the device.

[0007] If left in the light such as the sunlight the device need not be turned over and laid on an underground to expose solar cell means possibly present on the back side of the housing of the device, which would increase the chances to damaging the display. The device according to the invention can simply be left display up in the sun to convert solar energy into electric energy, with no chances for damaging the display due to the presence of some article on the underground.

[0008] The translucent or light transparent display which is flat nowadays, but could well be curved or even flexible can be any type of OLED display such as a passive matrix or active matrix OLED display. These kinds of matrix displays if not operational pass nowadays approximately 50 % of the light spectrum for which the solar cell means are sensitive and this represents energy which is now effectively used to establish power savings by the device according to the invention.

[0009] A practically preferred embodiment of the device according to the invention is characterised in that the solar cell means are back connect solar cell means.

[0010] This way the other side of solar cell means does not comprise cell patterns, which avoids the observation

through the display of such a solar cell grid pattern. The fact that such grid patterns used to blur images shown on the display prevents a skilled person from even trying to provide common solar cell means on the back side of the OLED display.

[0011] A further preferred embodiment of the device according to the invention is characterised in that the back connect solar cell means comprise a one sided evenly and uniformly coloured front side facing the back side of the OLED display and a back connect side which is soldered to one side of a printed circuit board (PCB) whose opposite side is fastened to the housing of the device.

[0012] Further advantageously in the absence of any grid pattern visible through the front side of the OLED display, an evenly and uniformly coloured inviting background is now observable through the OLED display together with the text, icons, images and videos made visible by the OLED display.

[0013] Another embodiment of the device according to the invention is characterised in that the device comprises further solar cell means fastened to the housing of the device, which may also be back connect solar cell means.

[0014] This way at wish all sides of the housing of the device may be provided with solar cell means. This makes the solar charging practically independent on the particular orientation wherein the device housing is put on an underground in the sunlight.

[0015] Still another embodiment of the device according to the invention is characterised in that the solar light translucent organic light emitting (OLED) display also has one or more side edges at least one being a bevelled side edge provided with inner light reflective material whereby the opposite side of the bevelled side edge is provided with still further solar cell means for receiving at least inner light emitted by the OLED display.

[0016] OLED displays provide backlighting by themselves and this represents energy, which can be reused and effectively reintroduced into the power supply system of the device by applying the above measures. This way the surplus of light such as internally therein caught sunlight and/or at least light generated by the OLED display can be coupled out and converted by the still further solar cell means into electric power for use in the device according to the invention.

[0017] If the inner reflective material is capable of passing external solar light to the still further solar cell means, such as in cases wherein via edges and/or extended solar cell parts external solar energy can be received this would provide extra power, if needed.

[0018] In such cases it is preferred to have the still further solar cell means in the form of back connect solar cell means, in order to avoid possible disturbing reflections to be visible on the OLED display.

[0019] The principles outlined so far are applicable in a variety of devices, in particular mobile devices as detailed hereinafter.

[0020] At present the device according to the invention

will be elucidated further together with its additional advantages while reference is being made to the appended drawing, wherein similar components are being referred to by means of the same reference numerals. In the drawing:

Figs. 1A and 1B show two embodiments of possible outlines of layers building up the device according to the invention;

Figs. 2A and 2B show various details of sandwiches of a back connect solar cell and a PCB applicable in the embodiments of figs. 1A and 1B;

Figs. 3A and 3B show a general layout and details respectively of a further embodiment of the device according to the invention; and

Fig. 4 shows a particular embodiment of the device according to the invention.

Figs. 1A and 1B schematically show of a device 1 being a portable or mobile device, a smart phone, an I-pad, an I-phone, an audio and/or video player, an mp3 or mp4 player, a tablet PC, a laptop, a navigation device for vehicles, such a for personal navigation, cars, ships, air planes and the like. The right part as shown is normally the flat upper part of the device 1, which comprises a light translucent organic light emitting (OLED) display 2 having a front side 3 for displaying information, images and/or video and a back side 4. Solar cell means 5 are provided on the back side 4 of the OLED display 2, which may be a passive matrix OLED display or an active matrix OLED display.

[0021] As shown in these figs. 1A and 1B, and further detailed in figs. 2A and 2B, the solar cell means 5 are a back connect solar cell means, which in practise allow the back connect side of these means 5 to be soldered to the upper side of a printed circuit board or PCB 6. Its opposite PCB side 7 is fastened to the housing of the device 1 or to further solar cell means 8 fastened to the device 1. The back side 4 of the OLED display 2 faces an evenly and uniformly coloured front side 9 of the solar cell means 5. This means that seen through the front side 3 no disturbing grid pattern is visible on the background of what is shown in the OLED 2.

[0022] The back connect solar cell means 5 mentioned herein that is the front side 9 may be provided with a laser cut hole 10 as shown in fig. 4, whereby the laser must be a cooled -water cooled- laser in order not to damage the solar cell means 5. Practically the hole 10 has a desired peripheral contour, such as the outline of a logo or image, for example an apple. At wish the hole gives room for a camera lens to be provided in the hole 10.

[0023] As shown in figs. 3A and 3B the solar light translucent organic light emitting display 2 also has one or more side edges 11. At least one thereof is a bevelled side edge 12 which is provided with an inner light reflective material 13, for example in the form of a reflective foil or a reflective layer. Light from within the OLED 2 is

reflected by the material 13 on the bevelled edge 12 and internally reflected to still further solar cell means 14 provided on an opposing extension of the OLED 2. These means 14 receive at least inner light emitted by the OLED display and/or solar light coupled into and travelling in the OLED display 2. At least the light generated internally in the OLED 2 can now be reused in the device to derive power there from by means of a charge circuit (not shown) for example Intivations own very low power consuming and efficient converters coupled to the various solar cell means 5, 8, 14 preferably having the form of single cell means. These mentioned solar cell means may also be back connect solar cells in which case only one type of such means is required.

Claims

1. A device comprising:

- a light translucent organic light emitting (OLED) display having a front side for displaying information, images and/or video and a back side, and
- solar cell means provided on the back side of the display.

2. Device according to claim 1, **characterised in that** the display is a flat OLED display.

3. Device according to claim 1 or 2, **characterised in that** the OLED display is a passive matrix or active matrix OLED display.

4. Device according to any of the claims 1-3, **characterised in that** the solar cell means are back connect solar cell means.

5. Device according to claim 4, **characterised in that** the back connect solar cell means comprise a one sided evenly and uniformly coloured front side facing the back side of the OLED display and a back connect side which is soldered to one side of a printed circuit board (PCB) whose opposite side is fastened to the housing of the device.

6. Device according to claim 5, **characterised in that** the device comprises further solar cell means fastened to the housing of the device or to the opposite side of the PCB.

7. Device according to claim 6, **characterised in that** the further solar cell means are back connect solar cell means.

8. Device according to any of the claims 1-7, **characterised in that** the solar light translucent organic light emitting (OLED) display also has one or more side



edges at least one being a bevelled side edge provided with inner light reflective material whereby the opposite side of the bevelled side edge is provided with still further solar cell means for receiving at least inner light emitted by the OLED display and/or solar light coupled into the OLED display. 5

9. Device according to claim 8, **characterised in that** the OLED display has one or more side edges provided with light reflective means. 10
10. Device according to claim 8 or 9, **characterised in that** the inner reflective material which may be in the form of a foil or layer, is capable of reflecting the light received in the OLED display to the still further solar cell means. 15
11. Device according to any of the claims 8-10, **characterised in that** the still further solar cell means are back connect solar cell means. 20
12. Device according to any of the claims 1-11, **characterised in that** the device is a portable or mobile device, a smart phone, an I-pad, an I-phone, an audio and/or video player, an mp3 or mp4 player, a tablet PC, a laptop, a navigation device for vehicles, such as for personal navigation, cars, ships, air planes and the like. 25
13. Device according to any of the claims 1-12, **characterised in that** any of the earlier mentioned back connect solar cell means is provided with a laser cut hole having a desired peripheral contour, such as the outline of a logo or image, for example an apple, which device may have a camera lens behind c.q. in the hole. 30 35
14. Device according to any of the claims 1-13, **characterised in that** the device comprises a charge circuit coupled to the solar cell means which are single cell means. 40

45

50

55

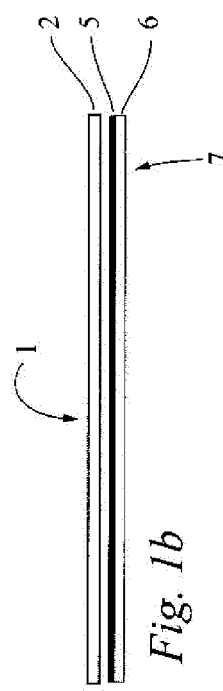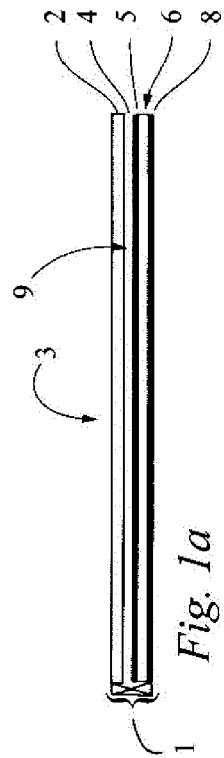

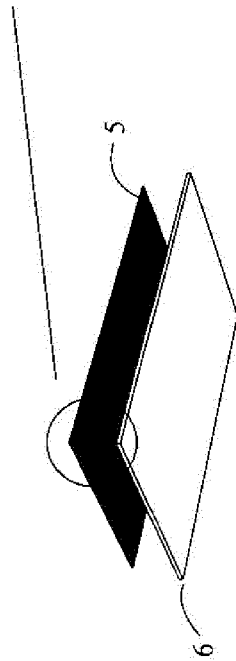
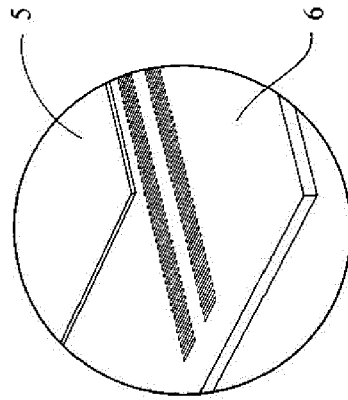
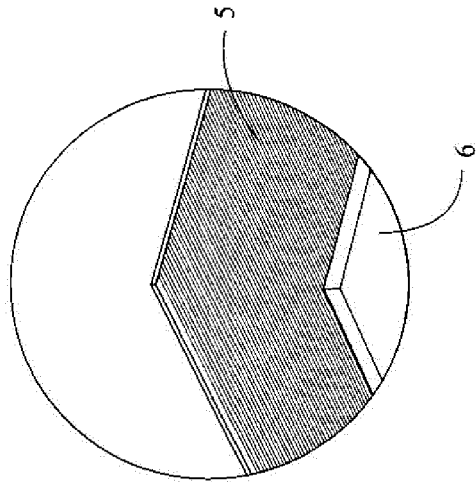


Fig. 2a

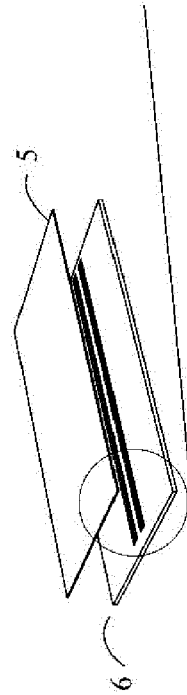


Fig. 2b

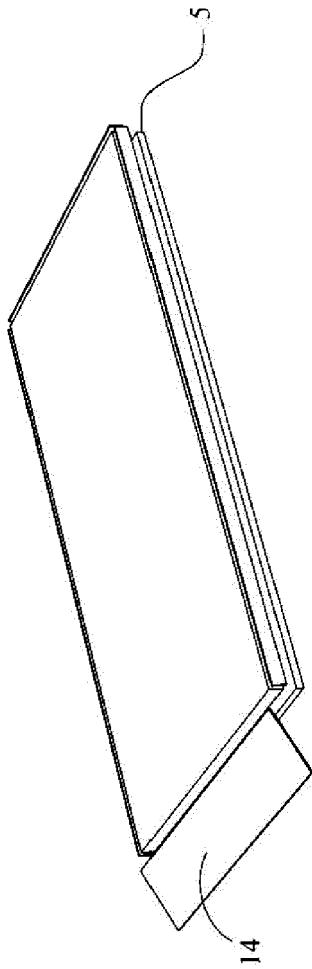


Fig. 3a

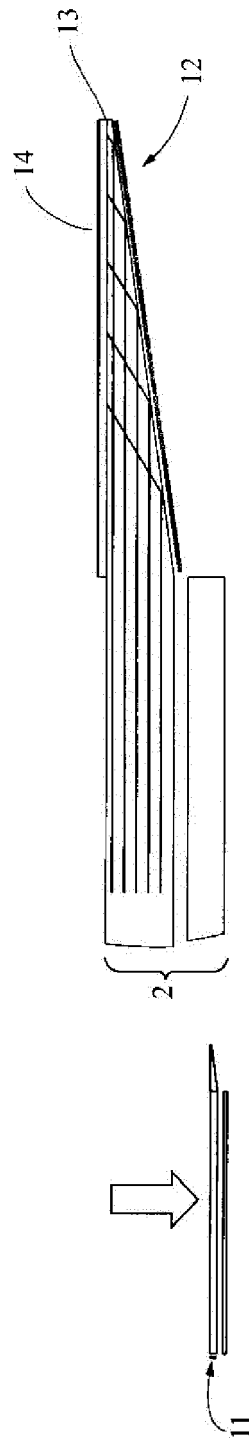


Fig. 3b

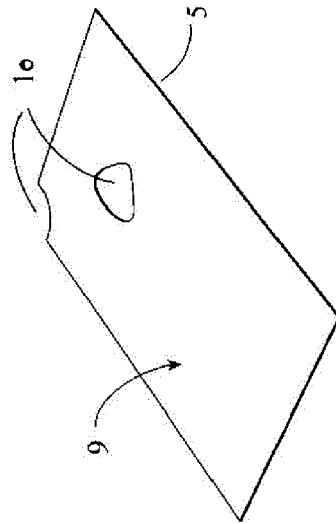


Fig. 4



EUROPEAN SEARCH REPORT

Application Number
EP 11 19 3969

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (IPC)
X	EP 1 187 213 A2 (EASTMAN KODAK CO [US]) 13 March 2002 (2002-03-13) * paragraph [0010] - paragraph [0019]; figures 1-4 *	1-7, 12-14	INV. H01L27/32 H04M1/02
X	DE 10 2008 059214 A1 (FF WERBETECHNIK COM FARUK OEZ [DE]; FRAUNHOFER GES FORSCHUNG [DE] FF W) 1 July 2010 (2010-07-01) * paragraph [0025] - paragraph [0041]; figures 1-3 *	1-7, 12-14	
X	JP 11 354773 A (JSR CORP) 24 December 1999 (1999-12-24) * abstract * * paragraph [0012]; figure 1 *	1-4	
X	US 6 356 031 B1 (THAGARD GREGORY B [US] ET AL) 12 March 2002 (2002-03-12) * column 2, line 25 - column 4, line 50; figures 1-4 *	1-4,14	
X	WO 94/10668 A1 (PEDERSEN KJELD [DK]; RASMUSSEN HENRIK FIND LINDSKOV [DK]) 11 May 1994 (1994-05-11) * page 2 - page 7; figures 1-3 *	1-7	TECHNICAL FIELDS SEARCHED (IPC) H01L H04M
A	WO 01/65711 A1 (LEEM SUNG MUK [KR]) 7 September 2001 (2001-09-07) * figures 1,5 *	6,11	
The present search report has been drawn up for all claims			
Place of search Munich		Date of completion of the search 27 April 2012	Examiner Bernabé Prieto, A
CATEGORY OF CITED DOCUMENTS X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document		T : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application L : document cited for other reasons & : member of the same patent family, corresponding document	

 2
EPO FORM 1503 03.02 (P04C01)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 11 19 3969

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report.
The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

27-04-2012

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
EP 1187213 A2	13-03-2002	CN 1342963 A	03-04-2002
		EP 1187213 A2	13-03-2002
		JP 2002156918 A	31-05-2002
		KR 20020020197 A	14-03-2002

DE 102008059214 A1	01-07-2010	NONE	

JP 11354773 A	24-12-1999	NONE	

US 6356031 B1	12-03-2002	JP 2002008851 A	11-01-2002
		US 6356031 B1	12-03-2002

WO 9410668 A1	11-05-1994	AT 151188 T	15-04-1997
		AU 5417794 A	24-05-1994
		DE 69309484 D1	07-05-1997
		DK 131892 A	29-04-1994
		EP 0667021 A1	16-08-1995
		JP H08502601 A	19-03-1996
		WO 9410668 A1	11-05-1994

WO 0165711 A1	07-09-2001	AU 5577100 A	12-09-2001
		CA 2370733 A1	07-09-2001
		CN 1354911 A	19-06-2002
		EP 1188247 A1	20-03-2002
		KR 20010086781 A	15-09-2001
		TW 475282 B	01-02-2002
		US 6847834 B1	25-01-2005
		WO 0165711 A1	07-09-2001

专利名称(译)	OLED显示器具有太阳能电池装置		
公开(公告)号	EP2605281A1	公开(公告)日	2013-06-19
申请号	EP2011193969	申请日	2011-12-16
申请(专利权)人(译)	INTIVATION HOLDING BV公司		
当前申请(专利权)人(译)	INTIVATION HOLDING BV公司		
[标]发明人	OSINGA ANNE J KARDOLUS MENNO		
发明人	OSINGA, ANNE J. KARDOLUS, MENNO GRÖNINGER, MARK ALEXANDER		
IPC分类号	H01L27/32 H04M1/02		
CPC分类号	H01L27/3227 H01L2251/5323 H04M1/0266		
外部链接	Espacenet		

摘要(译)

描述了一种包括半透明有机发光 (OLED) 显示器的装置, 该显示器具有用于显示信息, 图像和/或视频的背面和背面, 以及设置在显示器背面的太阳能电池装置。然后, 通过显示器照射的阳光可以转换为电力。太阳能电池装置可以是后连接太阳能电池装置, 其包括面向OLED显示器的后侧的单侧均匀且均匀着色的前侧和后连接侧, 后侧连接侧焊接到相对的印刷电路板 (PCB) 的一侧。侧面固定在装置的壳体上。有利地, 通过显示器可以看到平滑的未受干扰的背景。该设备是便携式或移动设备, 智能手机, I-pad, I-phone, 音频和/或视频播放器, mp3或mp4播放器, 平板电脑, 笔记本电脑, 车辆导航设备, 这种用于个人导航, 汽车, 轮船, 飞机等。

