

(19) World Intellectual Property Organization
International Bureau



(43) International Publication Date
3 July 2008 (03.07.2008)

PCT

(10) International Publication Number
WO 2008/079197 A1

- (51) International Patent Classification:
G09G 3/20 (2006.01)
- (21) International Application Number:
PCT/US2007/025473
- (22) International Filing Date:
13 December 2007 (13.12.2007)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
11/616,330 27 December 2006 (27.12.2006) US
- (71) Applicant (for all designated States except US): **EASTMAN KODAK COMPANY** [US/US]; 343 State Street, Rochester, New York 14650-2201 (US).
- (72) Inventors; and
- (75) Inventors/Applicants (for US only): **MILLER, Michael, Eugene** [US/US]; 280 Quaker Meeting House Road, Honeoye Falls, New York 14472 (US). **KANE, Paul, James** [US/US]; 84 Briarcliffe Road, Rochester, New York 14617

(US). **MURDOCH, Michael, John** [US/US]; 31 Harlem Street, Rochester, New York 14607 (US).


(74) Common Representative: **EASTMAN KODAK COMPANY**; 343 State Street, Rochester, NY 14650-2201 (US).

(81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BH, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DO, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, GT, HN, HR, HU, ID, IL, IN, IS, JP, KE, KG, KM, KN, KP, KR, KZ, LA, LC, LK, LR, LS, LT, LU, LY, MA, MD, ME, MG, MK, MN, MW, MX, MY, MZ, NA, NG, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RS, RU, SC, SD, SE, SG, SK, SL, SM, SV, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, ZA, ZM, ZW.

(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, NA, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI,

[Continued on next page]

(54) Title: ELECTRONIC DISPLAY HAVING IMPROVED UNIFORMITY

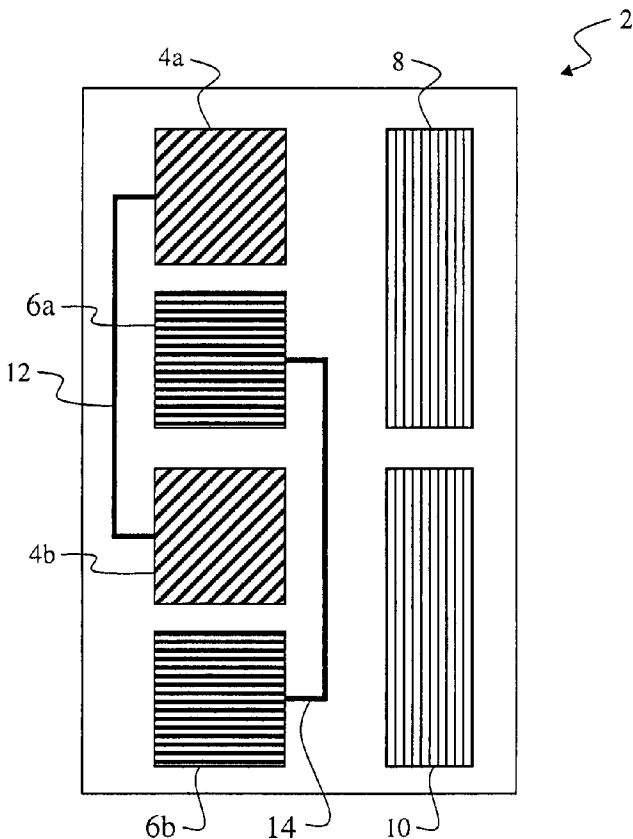

(57) Abstract: A display with improved visual uniformity, comprised of an array of independently-addressable light-emitting elements, including at least a first independently-addressable light-emitting element for producing a first color of light and a second independently-addressable light-emitting element for producing a second color of light; wherein at least the first independently-addressable light-emitting element is subdivided into at least two spatially separated commonly-addressed light-emitting areas and wherein at least a portion of the second independently-addressable light-emitting element is positioned between the spatially separated commonly-addressed light-emitting areas of the first independently-addressable light-emitting element.

WO 2008/079197 A1



FR, GB, GR, HU, IE, IS, IT, LT, LU, LV, MC, MT, NL, PL,
PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM,
GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:
— *with international search report*

ELECTRONIC DISPLAY HAVING IMPROVED UNIFORMITY

FIELD OF THE INVENTION

The present invention relates to flat panel displays, specifically flat
5 panel displays having segmented light-emitting elements to provide improved
spatial uniformity.

BACKGROUND OF THE INVENTION

Flat panel, color displays for displaying information, including
10 images, text, and graphics are widely used. These displays may employ any
number of known technologies, including liquid crystal light modulators, plasma
emission, electro-luminescence (including organic light-emitting diodes), and
field emission. Such displays include entertainment devices such as televisions,
monitors for interacting with computers, and displays employed in hand-held
15 electronic devices such as cell phones, game consoles, and personal digital
assistants. In these displays, the resolution of the display is always a critical
element in the performance and usefulness of the display. The resolution of the
display specifies the quantity of information that can be usefully shown on the
display and the quantity of information directly impacts the usefulness of the
20 electronic devices that employ the display.

However, the term “resolution” is often used or misused to
represent any number of quantities. Common misuses of the term include
referring to the number of light-emitting elements or to the number of full-color
groupings of light-emitting elements (typically referred to as pixels) as the
25 “resolution” of the display. This number of light-emitting elements is more
appropriately referred to as the addressability of the display. Within this
document, we will use the term “addressability” to refer to the number of
independently-addressable light-emitting elements per unit area of the display
device. A more appropriate definition of resolution is to define the size of the
30 smallest element that can be displayed with fidelity on the display. One method
of measuring this quantity is to display the narrowest possible, neutral (e.g., white)
horizontal or vertical line on a display and to measure the width of this line or to

display an alternating array of neutral and black lines on a display and to measure the period of this alternating pattern. Note that using these definitions, as the number of light-emitting elements increases within a given display area, the addressability of the display will increase while the resolution, using this
5 definition, generally decreases. Therefore, counter to the common use of the term “resolution”, the quality of the display is generally improved as the resolution becomes finer in pitch or smaller.

Addressability in most flat-panel displays, especially active-matrix displays, is limited by the need to provide signal busses and electronic control
10 elements in the display. Further in many flat panel displays, including Liquid Crystal Displays (LCDs) and bottom-emitting Electro-Luminescent (EL) displays, the electronic control elements are required to share the area that is required for light emission or transmission. In these technologies, the more such busses and control elements that are needed, the less area in the display is available for light
15 emission. Depending upon the technology, reduction of the area available for light emission can reduce the efficiency of light output, as is the case for LCDs, or reduce the brightness and/or lifetime of the display device, as is the case for EL displays. Regardless of whether the area required for patterning busses and control elements competes with the light-emitting area of the display, the decrease
20 in buss and control element size that occur with increases in addressability for a given display generally require more accurate, and therefore more complex, manufacturing processes and can result in greater number of defective panels, decreasing yield rate and increasing the cost of marketable displays. Therefore, from a cost and manufacturing complexity point of view, it is generally
25 advantageous to be able to provide a display with lower addressability. This desire is, of course, in conflict with the need to provide higher apparent resolution. Therefore, it would be desirable to provide a display that has relatively low addressability but that also provides high apparent resolution.

It has been known for many years that the human eye is more
30 sensitive to the spatial frequency of luminance in a scene than to color. In fact, current understanding of the visual system includes the fact that processing is performed within or near the retina of the human eye that converts the signal that

is generated by the photoreceptors into a luminance signal, a red/green difference signal and a blue/yellow difference signal. Each of these three signals have a different resolution with the luminance channel having the highest spatial frequency cutoff followed by the red/green spatial frequency cutoff and finally the blue/yellow spatial frequency cutoff. In fact, the cutoff for the luminance channel is nearly twice the spatial frequency cutoff for the red/green difference signal and nearly four times the spatial frequency cutoff of the blue/yellow difference signal.

This difference in sensitivity is well appreciated within the imaging industry and has been employed to provide display devices with high apparent resolution for a reduced addressability. In one example, Takashi et al. in US Patent 5,113,274, entitled "Matrix-type color liquid crystal display device", proposed the use of displays having two green for every red and blue light-emitting element. While such an array of light-emitting elements can perform well for displays with a very high addressability, it is important that the red light-emitting elements typically provide approximately 30 percent of the luminance. Therefore, under certain conditions, such as when displaying flat fields of red, it is possible to see artifacts (e.g., a red and black checkerboard pattern in areas that are intended to be perceived as a flat field red) that occur because of the scarcity of the red light-emitting elements within the array. Therefore, it is important to understand that in displays it is not only the size or the frequency of light-emitting elements that are important to understand the quality of the display device but also the space between the light-emitting elements. In fact, anytime that the distance between any two light-emitting elements of the same color subtends a visual angle greater than 1 minute of arc, it will be possible to see a checkerboard pattern when attempting to display a flat field of color.

It may be additionally desirable to include additional high luminance light-emitting elements. For example, within the field of Organic Light Emitting Diodes (OLEDs), it is known to introduce more than three light-emitting elements where the additional light-emitting elements have higher luminance efficiency, resulting in a display having higher luminance efficiency. Such displays have been discussed by Miller et al. in US Patent Application Publication 2004/0113875, entitled "Color OLED display with improved power efficiency".

When applying four or more different colors of subpixels it is then further known to utilize patterns of light-emitting elements having a higher addressability of high luminance white and green light-emitting elements than arrays of low luminance red and blue light-emitting elements as discussed by Miller et al. in US Patent
5 Application 2005/0270444, entitled "Color display with enhanced pixel pattern". Unfortunately, such an arrangement of light-emitting elements can result in the same undesirable checkerboard pattern in the color channels with lower addressability.

It is also known to provide displays having more than one color of
10 high luminance light-emitting element and to use each of these high luminance light-emitting elements to create the high frequency luminance channel. For example, US Patent Application 2005/0225574 and US Patent Application 2005/0225575, each entitled "Novel subpixel layouts and arrangements for high brightness displays" provide various arrangements of light-emitting elements
15 having two colors of high luminance light-emitting elements, such as the white and green light-emitting elements, and to arrange these light-emitting elements such that each row in the arrangement contains all colors of light-emitting elements, making it possible to produce a line of any color using only one row of light-emitting elements. Similarly, every pair of columns within the arrangement
20 discussed within this disclosure contains all colors of light-emitting elements within the display, making it possible to produce a line of any color using only two columns of light-emitting elements. Therefore, when the LCD is driven correctly, it can be argued that the vertical resolution of the device is equal to the inverse of the height of one row of light-emitting elements and the horizontal
25 resolution of the device is equal to the inverse of the width of two columns of light-emitting elements, even though it realistically requires more light-emitting elements than the two light-emitting elements at the intersection of such horizontal and vertical lines to produce a full-color image. However, since each pair of light-emitting elements at the junction of such horizontal and vertical lines
30 contains one high luminance (i.e., white or green) light-emitting element, each pair of light-emitting elements provides a relatively accurate luminance signal within each pair of light-emitting elements, providing a high-resolution luminance

signal. It is important to note that in arrangements of light-emitting elements such as these, as well as those discussed by US Patent 5,113,274, the high-luminance light-emitting elements can provide a luminance image with higher addressability than the addressability of any individual color of light-emitting element. As was
5 the case with Takashi and Miller, displays utilizing this pixel pattern will exhibit a checkerboard pattern when a flat field, single color luminance pattern is input.

Although the reduced addressability that can be attained using pixel patterns such as US patent 5,113,274, US Patent Application 2005/0270444, US Patent Application 2005/0225574 or US Patent Application 2005/0225575
10 generally reduce the complexity of manufacturing the final display, these patterns also lack uniformity when displaying flat fields of color for any display in which the gap between any two color subpixels of any one color subtends an angle greater than 1 minute of arc on the user's retina. This artifact limits the use of such patterns to displays with an addressability of around 300 full color pixels per
15 inch or greater. Displays with lower resolution will provide objectionable levels of the checkerboard artifact when viewed from some typical viewing distance. This is particularly troubling when attempting to apply these techniques in larger displays which are generally designed to have a lower addressability because they are typically viewed from a larger viewing distance. However because these
20 displays can be viewed from near viewing distances and often are viewed from near viewing distances by individuals making purchasing decisions on show room floors, the artifacts that occur in images generated on such arrangements of light-emitting elements makes the use of such pixel patterns on larger displays impractical.

25 Artifact reduction using arrangements of light-emitting elements such as the "RGB delta" pattern has been taught, for example by Noguchi et al. in US Patent 4969718, that are enabled by splitting the subpixel electrodes into equal halves. However in this case the split is done solely to solve electrical problems associated with the RGB delta pattern, and the split electrodes drive identical
30 colors and remain juxtaposed.

It is also known in the art to correct for image degradation (e.g., avoid flicker in LCD displays) by localizing the degradation on dark-colored, or

low luminance subpixels, as taught in US Patent Application 2005/0083277A1. It is taught therein that successive pairs of blue columns may share the same column driver through an interconnect, however the row selection mechanisms are independent, and the TFT's of the blue subpixels are remapped to avoid sharing of exact data values.

There is therefore a need to provide an enhanced arrangement of light-emitting elements, such as the ones described within this background, that require a minimum number of drive circuits and that enable the use of even lower addressabilities on full color displays. Specifically, it is desired to provide such an enhanced arrangement of light-emitting elements in displays having an addressability of less than 300 pixels per inch without creating the perception of non-uniformity within areas of an image that are intended to have a uniform color.

SUMMARY OF THE INVENTION

In accordance with one embodiment, the invention is directed towards a display with improved visual uniformity, comprised of an array of independently-addressable light-emitting elements, including at least a first independently-addressable light-emitting element for producing a first color of light and a second independently-addressable light-emitting element for producing a second color of light; wherein at least the first independently-addressable light-emitting element is subdivided into at least two spatially separated commonly-addressed light-emitting areas and wherein at least a portion of the second independently-addressable light-emitting element is positioned between the spatially separated commonly-addressed light-emitting areas of the first independently-addressable light-emitting element.

BRIEF DESCRIPTION OF THE DRAWINGS

Fig. 1 is a schematic diagram showing an arrangement of light-emitting elements for emitting at least three colors of light according to an embodiment of the present invention;

Fig. 2 is a schematic diagram showing an arrangement of light-emitting elements for emitting at least four colors of light according to an embodiment of the present invention;

Fig. 3 is a CIE chromaticity diagram depicting the chromaticity coordinates for red, green, blue and white light-emitting elements according to an embodiment of the present invention;

Fig. 4 is a schematic diagram showing an arrangement of light-emitting elements for emitting at least four colors of light according to an embodiment of the present invention;

Fig. 5 is a cross-sectional diagram of an active-matrix, top-emitting OLED display according to an embodiment of the present invention;

Fig. 6 is a plan view of the first electrode layer for an active-matrix, top-emitting OLED display according to an embodiment of the present invention;

Fig. 7 is a plan view of the row electrode layer for a passive matrix OLED display according to an embodiment of the present invention; and

Fig. 8 is a schematic diagram showing an arrangement of light-emitting elements for emitting at least four colors of light according to an embodiment of the present invention.

DETAILED DESCRIPTION OF THE INVENTION

As shown in Fig. 1, a display 2 with improved visual uniformity in accordance with an embodiment of the invention is comprised of an array of independently-addressable, light-emitting elements 4a/4b, 6a/6b, 8, 10, including at least a first independently-addressable, light-emitting element 4a/4b for producing a first color of light and a second independently-addressable, light-emitting element 6a/6b for producing a second color of light; wherein at least the first independently-addressable, light-emitting element 4a/4b is subdivided into at least two spatially separated commonly-addressed light-emitting areas 4a and 4b and wherein at least a portion 6a of the second light-emitting element 6a/6b is positioned between the spatially separated commonly-addressed light-emitting areas 4a and 4b of the first independently-addressable, light-emitting element

4a/4b. Although a display of the present invention may be comprised of only two light-emitting elements for emitting two colors of light, the display will preferably be a full-color display that is comprised of an array of light-emitting elements for emitting at least three different colors of light; including, e.g., light-emitting
5 elements **4a/4b** for emitting red, **6a/6b** for emitting blue and **8** and **10** for emitting green colors of light.

To fully appreciate the present invention, it is necessary to define low and high luminance light-emitting elements. Within the present invention, the term “high luminance light-emitting element” is defined as a light-emitting
10 element that has a peak output luminance value that is 40 percent or greater of the peak white luminance of the display device while a “low luminance light-emitting element” is a light-emitting element with a peak output luminance value less than 40 percent of the peak white luminance of the display device. Within a display comprised of at least red, green, and blue light-emitting elements, the red and blue
15 light-emitting elements will typically be low luminance light-emitting elements while the green light-emitting element will be a high luminance light-emitting element. In displays further comprised of broadband or multi-band light-emitting elements, such as white, yellow, or cyan these broadband or multi-band light-emitting elements will be high-luminance light-emitting elements.

20 As described above, at least the first independently-addressable light-emitting element is subdivided into at least two spatially separated commonly-addressed light-emitting areas. For purposes of the invention, such spatially separated commonly-addressed light-emitting areas of a single independently addressable light-emitting element may conveniently be referred to
25 as commonly addressed “portions” of the light emitting element, or as commonly addressed “sub-elements” of the independently addressable light-emitting element.

As used within this disclosure, the phrase “commonly addressed” refers to an arrangement in which two light emitting areas of a light emitting
30 element are electrically connected in a manner such that they are not independently controllable. That is, the commonly addressed light emitting areas

share the same select and drive lines, so that both necessarily receive the same input or driving signal.

As used within this disclosure, the phrase “positioned between” refers to a physical arrangement in which at least a portion of a second light-emitting element is interspersed with at least two spatially separated, commonly addressed light-emitting areas of a first light-emitting element, such that a line drawn between at least one point in one area of the first element and at least one point in another area of the first element intersects a portion of the second element. Because the patterns of the present invention often involve the arrangement of first and second elements within a rectilinear grid, often with inactive area for providing electronics, it is often impractical to place an element such that the centroid of a portion of the second element is geometrically between the center of mass of two portions of the first element. Therefore, the term “positioned between” will include arrangements in which multiple portions of the first element are located in separate rows or columns and a portion of the second element is located in the same row or column as one of the portions of the first element, but also in a row or column that is between the separate rows or columns which contain the portions of the first light-emitting element.

Figure 1 depicts a portion of a display comprised of one group of three colors of light-emitting elements, which may be repeated across the entire display to form a mosaic of light-emitting elements. Within this figure, a first independently-addressable light-emitting element for producing a first color of light **4** is comprised of two commonly-addressed sub-elements **4a** and **4b**. Further, a second independently-addressable light-emitting element **6** for producing a second color of light is further composed of two commonly-addressed sub-elements **6a** and **6b**. In accordance with this invention at least a portion **6a** of the second independently-addressable light-emitting element is positioned between the commonly-addressed sub-elements **4a** and **4b** of the first independently addressable light-emitting element **4**. Further, this repeating group of light-emitting elements within the array is additionally comprised of two further independently-addressable light-emitting elements **8**, **10** for emitting at least a third color of light.

As shown in Fig. 1, when the two further independently-addressable light-emitting elements **8**, **10** for emitting at least a third color of light each emit the same color of light, the display array of light-emitting elements includes one of the first independently addressable light-emitting element for each second independently-addressable light-emitting element. Further, there are two independently-addressable light-emitting elements **8**, **10** for emitting at least a third color of light for every first or second independently-addressable light-emitting element. That is, the display is comprised of fewer of one color of light-emitting element **4**, **6** than another color of light-emitting element **8**, **10**. Under these conditions, it is desirable for the color of light-emitting elements that are fewer in number **4**, **6** to be comprised of multiple sub-elements **4a**, **4b** and **6a**, **6b**. These sub-elements are placed in electrical contact with each other as indicated by the connections **12**, **14**, such that the two sub-elements are commonly-addressed. While the sub-elements may have the substantially the same or different light-emitting areas, in a preferred embodiment they are substantially the same areas such that they provide substantially the same luminance when activated. In displays of this type, the fact that the display has fewer of some colors of light-emitting elements (e.g., red **4**, blue **6**) than another color of light-emitting element (e.g., green **8**, **10**) implies that the average space between these light-emitting elements will be larger than the space between the light-emitting elements of other colors, which are greater in number. By forming each of the light-emitting elements that are fewer in number from multiple sub-elements, the average space between sub-elements of these colors of light-emitting elements may be reduced, providing improved uniformity. It should be noted that typically, the colors of light-emitting elements that are fewer in number will be low luminance light-emitting elements (eg., red and blue) since the numbers of these light-emitting elements may often be reduced without degrading the perceived sharpness of the display. However, in these same displays the colors of light-emitting elements **8**, **10** which are greater in number, will be composed of a single light-emitting region, the light-emitting element that is not divided into multiple sub-elements. These colors of light-emitting elements will typically correspond to high

luminance light-emitting elements such as green or white. In such a display configuration, the presence of the larger number of independently-addressable high luminance light-emitting elements is important to maintain the perceived sharpness of the visual display. For the reasons cited, a display of the present invention preferably has different numbers of light-emitting elements for emitting different colors of light, having fewer low luminance light-emitting elements 4, 6 at least one of which is formed from multiple sub-elements, than high luminance light-emitting elements 8, 10.

Ideally, the formation of light-emitting elements, which are composed of multiple sub-elements, will insure that the largest distance between two light-emitting regions (i.e., sub-elements or single light-emitting regions which comprise a light-emitting element) emitting light of a single color will be less than 1 minute of arc when the display is viewed from any reasonable viewing distance. This requirement insures that when a flat field of an individual color is shown on the display, the display will appear to be uniform in luminance rather than exhibiting spatial artifacts, such as a visible checkerboard pattern. Since any display may reasonably be viewed from distances of 16 inches or less, the invention will be preferably applied in displays having an addressability of 300 pixels per inch or less and more preferably in displays having an addressability of 200 pixels per inch or less. It might be noted that at these resolutions and a viewing distance of 16 inches, the visual angle of a pixel of a 300 pixel per inch display is just under 0.8 minutes of arc and the visual angle of a pixel on a 200 pixel per inch display is approximately 1.1 minutes of arc.

In another embodiment shown in Fig. 2, a portion of a full color display 20 contains an array of four independently-addressable, light-emitting elements 22, 24, 26, 28, for producing four different colors of light, each light-emitting element comprised of two commonly-addressed sub-elements a, b. In one desirable configuration, each of the independently-addressable light-emitting elements in the array of four light-emitting elements may contain two commonly-addressed sub-elements 22a, 22b which together form an independently-addressable light-emitting element 22 for emitting red light, two commonly-addressed sub-elements 24a, 24b which together form an independently-

addressable light-emitting element **24** for emitting white light, two commonly-addressed sub-elements **26a**, **26b** which together form an independently-addressable light-emitting element **26** for emitting green light, and two commonly-addressed sub-elements **28a**, **28b** which together form an
5 independently addressable light-emitting element **28** for emitting blue light.

As shown in Fig. 2, these sub-elements are arranged in two columns **46**, **48** and four rows **38**, **40**, **42**, **44**. Within this embodiment, one of the two commonly addressed sub-elements which form each of the four independently-addressed light-emitting elements are positioned in different
10 columns of the array of light-emitting elements and are separated by at least one row. Note that at least one of the sub-elements for a different one of the four independently-addressable light-emitting elements are located in the intervening row. For example, the red independently-addressable light-emitting element **22** is composed of a sub-element **22a** within the first row **38** of sub-elements and a sub-
15 element **22b** in the third row **42** of sub-elements. One of these sub-elements **22a** is located in the first column of sub-elements **46** while the other **22b** is located in the second column **48** of sub-elements. Notice that the sub-elements **24a** and **28a** are located in the row **40** between the two commonly addressed sub-elements **22a**, **22b**, and in the same columns **46**, **48** as one of the commonly addressed sub-
20 elements **22a**, **22b** which compose the independently-addressable light-emitting element **22** and are thus between the commonly addressed sub-elements **22a**, **22b**, which compose the independently-addressable light-emitting element. **22**. In fact, within this embodiment, one of the sub-elements is located between any of the pair of commonly addressed sub-elements, which comprise an independently-
25 addressable light-emitting element. Therefore, by defining any of these light-emitting elements as the first independently-addressable light-emitting element for emitting a color of light and any other of the independently-addressable light-emitting elements as the second independently-addressable light-emitting element for emitting a different color of light at least the first and second independently
30 addressable light-emitting elements for emitting different colors of light are subdivided into at least two sub-elements. Notice further that the red and blue independently-addressable light-emitting elements **22**, **28** will typically be low

luminance light-emitting elements while the green and white independently-addressable light-emitting elements **26, 24** will typically be high luminance light-emitting elements.

5 Within this embodiment, the commonly-addressed sub-elements may be electrically connected to form each independently-addressable light-emitting element. The connecting lines **30, 32, 34, 36** represent electrical connections for connecting each of the commonly-addressed sub-elements together. Generally, when the present invention is implemented within an active-matrix display, it will be preferred that an active matrix circuit will be provided to supply power to each independently-addressable light-emitting element and this same circuit will be connected to each of the commonly addressed sub-elements directly or that an electrical connection may be formed between the two sub-elements to allow power to be provided from one circuit to the commonly-addressed sub-elements within each light-emitting element. As stated earlier, the independently-addressable light-emitting elements of Fig. 2 are comprised of an array of light-emitting elements for emitting at least three different colors of light, including red, green, blue and white light. Example CIE 1931 chromaticity coordinates for red **52**, green **54**, and blue **56** light emission are shown in Fig. 3. Notice that the chromaticity coordinates of any red, green, and blue light-emitting element will form a triangle **58** in chromaticity space, which is typically referred to as the color gamut of a display employing light-emitting elements which emit light having these chromaticity coordinates. Further, the chromaticity coordinates **60** of the white light-emitting element will lie near the center of this color gamut triangle **58** and will therefore emit a color that is inside the color gamut defined by the chromaticity coordinates of the red, green, and blue colors of light.

25 A full color display employing the array of four light-emitting elements **22, 24, 26, 28** in Fig. 2 may be formed by simply tiling this array across the entire display. However, it should be recognized that this array may be rotated, mirrored, flipped and/or transposed as it is tiled along either dimension of the display. In fact, in a preferred embodiment, this array will be rotated 180 degrees to form a tile that may be used to populate the arrays within the neighboring horizontal and vertical locations within the display.

When rendering information on displays having commonly-addressed sub-elements as shown in the previous patterns, the apparent uniformity of the display will be significantly improved. However, by increasing the extent of the elements, it is possible that when presenting images on such displays, the apparent sharpness of the display may, under certain conditions, be reduced slightly. This loss of apparent sharpness may be overcome when spatially separated commonly-addressed light emitting areas are arranged to be aligned along two or more dimensions of the display. That is, the loss of sharpness can be reduced when the spatially separated commonly-addressed light emitting areas of at least one of the independently-addressable light emitting elements lie substantially along a first dimension, and the spatially separated commonly-addressed light emitting areas of at least one other independently-addressable light emitting element lie substantially along a second dimension of the display. One embodiment of such arrangement of light-emitting elements is depicted in Fig. 8.

Fig. 8 shows a portion of a full color display **170** containing an array of eight independently-addressable, light-emitting elements **172, 174, 176, 178, 180, 182, 184, 186**, for producing four different colors of light, each light-emitting element comprised of two commonly-addressed sub-elements **a, b**. In one desirable configuration, the depicted portion of the display comprising an array of eight light-emitting elements may contain two independently-addressable, light-emitting elements of each of four colors. As shown in Fig. 8, the two independently-addressable light-emitting elements **172, 184** for emitting red light each consist of two commonly-addressed sub-elements. The independently-addressable light-emitting element **172** consists of the two commonly addressed sub-elements **172a** and **172b** connected by connecting line **204** while the independently-addressable light-emitting element **184** consists of the two commonly addressed sub-elements **184a** and **184b** connected by connecting line **212**. The two independently-addressable light-emitting elements **176, 182** for emitting green light each consist of two commonly-addressed sub-elements. The independently-addressable light-emitting element **176** consists of the two commonly addressed sub-elements **176a** and **176b** connected by connecting line

206 while the independently-addressable light-emitting element 182 consists of the two commonly addressed sub-elements 182a and 182b connected by connecting line 216. The two independently-addressable light-emitting elements 174, 186 for emitting white light each consist of two commonly-addressed sub-
5 elements. The independently-addressable light-emitting element 174 consists of the two commonly addressed sub-elements 174a and 174b connected by connecting line 210 while the independently-addressable light-emitting element 186 consists of the two commonly addressed sub-elements 186a and 186b connected by connecting line 214. Finally, the two independently-addressable
10 light-emitting elements 178, 180 for emitting blue light each consist of two commonly-addressed sub-elements. The independently-addressable light-emitting element 178 consists of the two commonly addressed sub-elements 178a and 178b connected by connecting line 208 while the independently-addressable light-emitting element 180 consists of the two commonly addressed sub-elements 180a
15 and 180b connected by connecting line 218.

As shown in Fig. 8, these sub-elements are arranged in four columns 188, 190, 192, 194 and four rows 196, 198, 200, 202. Within this embodiment, at least one of the two commonly addressed sub-elements which form one of the independently-addressed light-emitting elements are positioned in
20 different columns of the array of light-emitting elements and are separated by at least one column. Note that at least one of the sub-elements for a different one of the independently-addressable light-emitting elements are located in the intervening column. Additionally, at least one of the two commonly addressed sub-elements which form one of the independently-addressed light-emitting
25 elements are positioned in different rows of the array of light-emitting elements and are separated by at least one row. Note that at least one of the sub-elements for a different one of the independently-addressable light-emitting elements are located in the intervening row. For example, the red independently-addressable light-emitting element 172 is composed of a sub-element 172a within the first row
30 196 of sub-elements and a sub-element 172b in the third row 200 of sub-elements. One of these sub-elements 172a is located in the first column of sub-elements 188 while the other 172b is located in the second column 190 of sub-elements. Notice

that the sub-elements **174a** and **180a** are located in the row **198** between the two commonly addressed sub-elements **172a**, **172b**, and in the same columns **188**, **190** as one of the commonly addressed sub-elements **172a**, **172b** which compose the independently-addressable light-emitting element **172** and are thus between the

5 commonly addressed sub-elements **172a**, **172b**, which compose the independently-addressable light-emitting element. **172**. Further, the blue independently-addressable light-emitting element **180** is composed of a sub-element **180a** within the second column **190** of sub-elements and a sub-element **180b** in the fourth column **194** of the array of light-emitting elements. The sub-

10 elements **184a** and **186a** are positioned on the same rows as **182a** and **182b** but are located in the column **192** between the commonly addressed sub-elements **180a** and **180b**. In this example, the commonly addressed sub-elements. As such, the spatially separated commonly-addressed light emitting areas **172a**, **172b** of at least one of the independently-addressable light emitting elements **172** lie

15 substantially along a first dimension defined by the direction of the columns of light-emitting elements, and the spatially separated commonly-addressed light emitting areas **180a**, **180b** of at least one other independently-addressable light emitting element **180** lie substantially along a second dimension of the display. In this particular embodiment, the two independently-addressable light emitting

20 elements **172**, **180** each emit a different color of light but they may also emit the same color of light.

It should be further noted, that in such a display, it is preferable that the incoming data be processed to be sensitive to the presence and directions of edges within the images that are to be displayed. Specifically, the processing

25 method should determine the location of edges within the input data. When an edge is detected, its direction should be determined and the incoming data should be processed to form the final image such that the independently-addressable light-emitting elements whose separated commonly-addressed light emitting areas lie along a direction that is most similar to the direction of the edge within the

30 incoming data are preferentially driven to higher drive values than independently-addressable light-emitting elements whose separated commonly-addressed light emitting areas lie along a different direction.

In another embodiment shown in Fig. 4, one array of sub-elements that represents a repeating pattern of sub-elements which form a portion 68 of a display is shown that contains four light-emitting elements 70, 72 74 and 76, each of which emits a different color of light, and each of which is divided into sub-elements. In this case the number of sub-elements per light-emitting element is unequal. For example, the first colored independently-addressable light-emitting element 70 is comprised of five commonly-addressed, sub-elements 70a, 70b, 70c, 70d, 70e. The second independently-addressable light-emitting element 72 is comprised of five sub-elements 72a, 72b, 72c, 72d, and 72e, the third independently-addressable light-emitting element 74 is comprised of three sub-elements 74a, 74b, 74c, and the fourth independently-addressable light-emitting element 76 has three sub-elements 76a, 76b, 76c. The relative number of sub-elements per colored light-emitting element, as compared to the other colored light-emitting elements, may be chosen based on consideration of any number of factors, including the spectral content and apparent brightness of each colored emitter, the luminous efficiency of these emitters, or the expected lifetime of these emitters. It will be noted that the sub-elements are arrayed in an irregular pattern (i.e., has no obvious geometrical order). The arrangement of the sub-elements may be regular or irregular, and furthermore may be chosen randomly or algorithmically, with the constraint that the sub-elements of each of the four light-emitting elements are interspersed among themselves so as to ensure that the largest distance between two sub-elements of a single color will be less than 1 minute of arc when the display is viewed from any reasonable viewing distance. A pattern such as that in the portion of a display shown in Fig. 4 may be repeated throughout the display or may be varied throughout the display. Further, commonly-addressed sub-elements need not be constrained by rectangular boundaries as shown, but may be intertwined.

As illustrated by this embodiment, several commonly-addressed sub-elements may be used to compose a single independently-addressable light-emitting element. The fact that each of these independently-addressable light-emitting elements may require only one circuit to drive the entire group of sub-

elements which comprise this light-emitting element relaxes the constraint on the number of individual light-emitting sub-elements within a display, as it is often the size of the circuitry required to drive any sub-element which constrains the number of sub-elements. For this reason, it is important to discuss an active matrix embodiment of this invention in more detail. The basic concept of the present disclosure may be applied using any display technology, including displays that actively produce light. Such displays may include technologies that modulate light from a large area light source, including technologies such as liquid crystal displays. However, this invention will preferably be provided in emissive displays such as electroluminescent displays.

Within this disclosure, relevant electroluminescent display technologies include those employing stacks of organic materials, typically referred to as Organic Light Emitting Diode or OLED displays. The structure of an OLED typically comprises, in sequence, an anode, an organic electroluminescent (EL) medium, and a cathode, which are deposited upon a substrate. The organic EL medium disposed between the anode and the cathode is commonly comprised of an organic hole-transporting layer (HTL) and an organic electron-transporting layer (ETL). Holes and electrons recombine and emit light in the ETL near the interface of HTL/ETL. Tang et al., "Organic electroluminescent diodes", *Applied Physics Letters*, 51, 913 (1987), and U.S. Pat. No. 4,769,292, demonstrated highly efficient OLEDs using such a layer structure. Since then, numerous OLEDs with alternative layer structures have been disclosed. For example, there are three-layer OLEDs that contain an organic light-emitting layer (LEL) between the HTL and the ETL, such as that disclosed by Adachi et al., "Electroluminescence in Organic Films with Three-Layer Structure", *Japanese Journal of Applied Physics*, 27, L269 (1988), and by Tang et al., "Electroluminescence of doped organic thin films", *Journal of Applied Physics*, 65, 3610 (1989). The LEL commonly includes a host material doped with a guest material wherein the layer structures are denoted as HTL/LEL/ETL. Further, there are other multi-layer OLEDs that contain a hole-injecting layer (HIL), and/or an electron-injecting layer (EIL), and/or a hole-blocking layer, and/or an electron-blocking layer in the devices. While the subsequent

embodiments will be provided with respect to OLED display, it will be well understood by those skilled in the art that this same invention may readily be applied to EL displays which include coatable inorganic materials or combinations of organic and inorganic materials, which may be coated onto an active or passive matrix backplane. One such display technology employs a light-emitting layer formed from quantum dots as described in co-pending USSN 11/226,622 filed September 14, 2005, entitled "Quantum Dot Light Emitting Layer", the disclosure of which is herein incorporated by reference.

Herein, a particular embodiment employing an active-matrix, top-emitting organic light emitting diode (OLED) display will be provided, the structure of which is shown in Fig. 5. As shown, the active-matrix, top-emitting OLED display is typically formed on a substrate **90**. This substrate generally provides an underlying structure on which the display may be formed and may be composed of various materials, such as glass, metal foil or any other material. Active matrix circuitry is then constructed on this substrate **90**. As shown in this figure, the active matrix circuitry, which includes a TFT formed from a semiconductor active layer **92**, a gate dielectric layer **94**, and a gate conductor **96**. A first insulating layer **98** is then formed over the gate conductor **96**. A power line **100** is then formed and connected to the source of the TFT. A signal or data line **102** is formed typically in the same step. Although not shown within this cross-sectional view, at least a select TFT and capacitor may be formed on the substrate, which allows a data signal that is provided on the data line to regulate the voltage of the gate conductor **96**, to regulate the power across the TFT. A second insulating layer **104** is then formed over the active matrix circuitry. A first electrode **106** is then formed such that it is contact with the semiconductor active layer **92** wherein the connection is typically formed through a via **126**. Note that this first electrode is typically patterned to form electrode segments, which spatially define individual regions of light emission. Also shown in this embodiment are connector segments **108**, which allow electrical connection to be formed between sub-elements of each segment of the first electrode. Note that in this embodiment, these connector segments **108** are typically patterned from the same material as the first electrode **106**. An inter-pixel dielectric **110** is then

formed to occlude the area between the first electrode **106** segments and to allow the successive layers to be formed as uniform coatings. A stack of organic electro-luminescent materials is then deposited over the inter-pixel dielectric **110** and the first electrode **106** to form an organic electro-luminescent material layer
5 **112**. Finally, a second electrode **114** is formed over the organic electro-luminescent materials. When the electro-luminescent materials **112** are stimulated by an electric field between the first **106** and second **114** electrodes, light **116** is produced and propagates through the second electrode to the viewer.

In this embodiment, it should be noted that in addition to providing
10 a layer that allows uniform coating of the organic electro-luminescent materials **112** and the second electrode **114**, the inter-pixel dielectric **110** also prevents contact of the connector segments **108** with the electro-luminescent materials **112** or the second electrode **114** such that light emission will not occur in the area of the connector segments **108**. Therefore, while light emission **116** will occur over
15 the area of each segment of the first electrode **106**, light will not be emitted in the areas that are defined by the connector segments **108**.

A representation of a portion **120** of the top view of the layer forming the first electrode **106** and connector segment layer **108** is shown in Fig. 6 that corresponds to the cross sectional view shown in Fig. 5. As shown in this
20 figure, the line A-A designates the cross sectional line from which the cross-sectional view of Fig. 5 was drawn. Note that an independently-addressable light-emitting element is formed between this first electrode layer and the second electrode within this display configuration. Further, within this embodiment, this independently-addressable light-emitting element is defined by a segment of the
25 first electrode layer which is connected to the active matrix circuit, specifically the semiconductor active layer **92** of a TFT on the substrate. As shown in Fig. 6, this connection is formed through the via **126**. Therefore, an independently-addressable light-emitting element in this embodiment is formed from a pair of electrodes, at least one of which is patterned to form electrode segments which
30 spatially define sub-elements **122a**, **122b**, separated by a medium, specifically a organic electro-luminescent material layer **112**, that is in electrical contact with the pair of electrodes and that is stimulated to produce light. Within this

embodiment, a connector segment **108** electrically connects the electrode segments of the sub-elements to each other. Further note that within this particular embodiment, for each pair of independently-addressable light-emitting elements **122, 128**, there are two vias **126, 130** which connect these

5 independently-addressable light-emitting elements to an active matrix circuit even though there are effectively four sub-elements **122a, 122b, 128a, and 128b** providing light emission. Therefore, there is a need for only two circuits to provide a signal to these four sub-elements. This embodiment is, therefore, particularly advantaged when the minimum size of the light-emitting elements are

10 limited by the area required for creation of each circuit to drive each independently addressable light-emitting element. Typically, this condition will occur when larger circuits which employ more than two TFTs and one capacitor are required to compensate for voltage threshold shifts or mobility differences of the TFTs as discussed by US patent application number 11/312,016, entitled

15 "Display device and driving method thereof", US Patent 7,023,408 entitled "Pixel circuit for active matrix OLED and driving method", and US Patent 6,847,340 entitled "Active organic light emitting diode drive circuit", the disclosures of all of which are hereby incorporated by reference.

Note that within this embodiment, the display may be a color

20 display having three or more differently colored light-emitting elements. In one embodiment, different organic electro-luminescent materials may be deposited on the electrode segments that produce the different independently addressable light-emitting elements. However, in another embodiment, an encapsulating glass may be placed above the second light-emitting layer to provide a transparent protective

25 layer. Further, color change materials may be deposited on top of the electrode or color filters may be deposited on the inside of the encapsulating glass to provide a full color display without patterning organic electro-luminescent materials within the display structure. Note that regardless of where the color filter or color change materials are placed, different materials will generally be aligned such that the

30 light that is emitted by the various sub-elements **122a, 122b** that form an independently-addressable light-emitting element will be affected to provide the user with the same color of light.

It is also possible to provide passive matrix embodiments of the present invention. Typical passive matrix displays are comprised of a first electrode that is typically formed from horizontal lines of a material to form electrode rows. The active materials, i.e., emissive or modulating, are then placed over this first layer and a second electrode layer is formed as vertical lines of material to form electrode columns. An independently addressable light-emitting element is then formed at the intersection of a row and column electrode such that when an electric field is created between them, the light-emitting element produces or modulates light.

Within the current invention, at least a first independently-addressable light-emitting element is subdivided into at least two commonly-addressed sub-elements and a portion of the second independently-addressable light-emitting element is positioned between the commonly-addressed sub-elements of the first independently-addressable light-emitting element. Within a passive matrix embodiment, this may be accomplished by creating a row or column electrode that intersects the remaining electrode at two locations rather than one.

One such embodiment of a pair of row electrodes **152, 154** and areas of the light-emitting elements defined by the intersection of these row electrodes **152, 154** and column electrodes **160, 162, 164, 166** is shown in Fig. 7. Within this figure, three points of intersection of the row electrodes **152, 154** and the column electrode **160**, defining three sub-elements are numbered as **156a, 156b, and 158**. As shown, two row electrodes **152, 154** are formed within a portion of a display **150**. However, these two row electrodes are not straight lines as is practiced within the art but instead are c-shaped to allow two lines that form the open ends of the c-shaped structure to interlock with the neighboring row electrodes. That is the first row electrode **152**, interlocks with the second row electrode **154**, such that the two open ends of the c-shaped structure intersect any column electrode to form a single independently-addressable light-emitting element that is comprised of two sub-elements and such that a sub-element on the adjacent electrode lies between the two sub-elements defined by the first row

electrode. For example, the two sub-elements **156a** and **156b** which are formed at the intersection of the first row electrode **152** with a perpendicular column electrode (not shown), will be driven to the same drive value when a voltage differential is created between the first row electrode **152** and the column electrode. The light-emitting element **158** is positioned between and driven independent of these two sub-elements **156a**, **156b** as it is connected to the second row electrode **154**.

When different organic electro-luminescent materials are deposited at the light-emitting element **158** than is deposited at the light-emitting element **156**, or when a color filter or color change material is deposited such that it influences the color of light for one of these light-emitting elements differently than for the other, it is possible to obtain a display with improved visual uniformity. This display includes at least a first independently-addressable light-emitting element **156** for producing a first color of light and a second independently-addressable light-emitting element **158** for producing a second color of light; wherein at least the first independently-addressable light-emitting element **156** is subdivided into at least two commonly-addressed sub-elements **156a**, **156b** and wherein at least a portion of the second independently-addressable light-emitting element **158** is positioned between the commonly-addressed sub-elements of the first independently-addressable light-emitting element.

The invention has been described in detail with particular reference to certain preferred embodiments thereof, but it will be understood that variations and modifications can be effected within the spirit and scope of the invention.

PARTS LIST

- 2 display
- 4 independently-addressable light-emitting element
- 4a, 4b commonly-addressed sub-elements
- 6 independently-addressable light-emitting element
- 6a, 6b commonly-addressed sub-elements
- 8 independently-addressable light-emitting element
- 10 independently-addressable light-emitting element
- 12 connection
- 14 connection
- 20 display
- 22 independently-addressable light-emitting element for emitting red light
- 22a, 22b commonly-addressed sub-elements for emitting red light
- 24 independently-addressable light-emitting element for emitting white light
- 24a, 24b commonly-addressed sub-elements for emitting white light
- 26 independently-addressable light-emitting elements for emitting green light
- 26a, 26b commonly-addressed sub-elements for emitting green light
- 28 independently-addressable light-emitting element for emitting blue light
- 28a, 28b commonly-addressed sub-elements for emitting blue light
- 30 connecting line
- 32 connecting line
- 34 connecting line
- 36 connecting line
- 38 first row
- 40 second row
- 42 third row
- 44 fourth row
- 46 first column
- 48 second column
- 52 chromaticity coordinates for red
- 54 chromaticity coordinates for green
- 56 chromaticity coordinates for blue

- 58 gamut triangle
- 60 chromaticity coordinates for white
- 68 portion of display
- 70 first independently-addressable light-emitting element
- 70a, 70b, 70c, 70d, 70e commonly-addressed sub-elements
- 72 second independently-addressable light-emitting element
- 72a, 72b, 72c commonly-addressed sub-elements
- 74 third independently-addressable light-emitting element
- 74a, 74b, 74c commonly-addressed sub-elements
- 76 fourth independently-addressable, light-emitting element
- 76a, 76b, 76c, 76d, 76e commonly-addressed sub-elements
- 90 substrate
- 92 semiconductor active layer
- 94 gate dielectric layer
- 96 gate conductor
- 98 first insulating layer
- 100 power line
- 102 signal line
- 104 second insulating layer
- 106 first electrode
- 108 connector segment
- 110 inter-pixel dielectric
- 112 organic electro-luminescent material layer
- 114 second electrode
- 116 light emission
- 120 display portion
- 122 first independently-addressable, light-emitting element
- 122a, 122b commonly-addressable sub-elements
- 126 via
- 128 second independently-addressable, light-emitting element
- 128a, 128b commonly-addressed sub-elements
- 130 via

150 display portion
152 first row electrode
154 second row electrode
156 first independently-addressable light-emitting element
156a, 156b commonly-addressed sub-elements
158 second independently-addressable light-emitting element
160 column electrode
162 column electrode
164 column electrode
166 column electrode
170 display
172 red independently-addressable, light-emitting element
172a, 172b commonly-addressable sub-elements
174 white independently-addressable, light-emitting element
174a, 174b commonly-addressable sub-elements
176 green independently-addressable, light-emitting element
176a, 176b commonly-addressable sub-elements
178 blue independently-addressable, light-emitting element
178a, 178b commonly-addressable sub-elements
180 blue independently-addressable, light-emitting element
180a, 180b commonly-addressable sub-elements
182 green independently-addressable, light-emitting element
182a, 182b commonly-addressable sub-elements
184 red independently-addressable, light-emitting element
184a, 184b commonly-addressable sub-elements
186 white independently-addressable, light-emitting element
186a, 186b commonly-addressable sub-elements
188 first column
190 second column
192 third column
194 fourth column
196 first row

198 second row
200 third row
202 fourth row
204 connecting line
206 connecting line
208 connecting line
210 connecting line
212 connecting line
214 connecting line
216 connecting line
218 connecting line

WHAT IS CLAIMED IS:

1. A display with improved visual uniformity, comprised of an array of independently-addressable light-emitting elements, including at least a first independently-addressable light-emitting element for producing a first color of light and a second independently-addressable light-emitting element for producing a second color of light; wherein at least the first independently-addressable light-emitting element is subdivided into at least two spatially separated commonly-addressed light-emitting areas and wherein at least a portion of the second independently-addressable light-emitting element is positioned between the spatially separated commonly-addressed light-emitting areas of the first independently-addressable light-emitting element.
2. The display of claim 1, wherein the display is an electro-luminescent display.
3. The display of claim 1, wherein the display is comprised of an array of light-emitting elements for emitting at least three different colors of light.
4. The display of claim 3, wherein the light-emitting elements produce at least red, green and blue colors of light.
5. The display of claim 4, wherein the array of light-emitting elements include at least one light-emitting element for emitting a color that is inside the color gamut defined by the chromaticity coordinates of the red, green, and blue colors of light.
6. The display of claim 1, wherein each of the first and second independently-addressable light-emitting elements for emitting different colors of light are subdivided into at least two spatially separated commonly-addressed light-emitting areas.

7. The display of claim 1, wherein the at least first light-emitting element emits a color of light having relatively lower luminance than at least one other light-emitting element of the display.

8. The display of claim 1, wherein the at least first light-emitting element emits a color of light having relatively higher luminance than at least one other light-emitting element of the display.

9. The display of claim 1, wherein the display has different numbers of independently addressable light-emitting elements for emitting different colors of light, and wherein the number of individually-addressable light-emitting elements for emitting the first color of light are fewer in number than the number of individually-addressable light-emitting elements for emitting at least one other color of light.

10. The display of claim 1, wherein the addressability of the display is less than 300 pixels per inch

11. The display of claim 10, wherein the addressability of the display is less than 200 pixels per inch.

12. The display of claim 1, wherein each of the spatially separated commonly-addressed light-emitting areas of the at least first light-emitting element are of substantially the same area.

13. The display of claim 1, wherein the at least first independently-addressable light-emitting element is comprised of:

a) a pair of electrodes, at least one of which is patterned to form electrode segments which spatially define the spatially separated light-emitting areas of the light-emitting elements; and

b) a medium that is in electrical contact with the pair of electrodes and that is stimulated to produce or modulate light;

wherein the electrode segments are electrically connected to each other.

14. The display of claim 13, wherein the display is an active-matrix display further comprised of circuits for providing control signals to each independently addressable light-emitting element, wherein the spatially separated light-emitting areas of the at least first independently addressable light-emitting element are actively controlled by the same circuit.

15. The display of claim 14, wherein the display is an electroluminescent display employing a top emitting architecture.

16. The display of claim 14, wherein the electrode segments are electrically connected to each other by a connection formed between the electrode segments in the same plane as the electrode segments.

17. The display of claim 13, wherein the display is a passive matrix.

18. The display of claim 13, wherein the independently-addressable light-emitting elements are further comprised of color filters or color change materials that are placed in alignment with the individual electrode segments, said color filters or color change materials being similarly segmented to said electrode segments.

19. The display of claim 13, wherein the segmented electrodes each stimulate a medium specific to the desired color of light emission at said segmented electrode site, said medium being similarly segmented to said electrode segments.

20. The display of claim 1, wherein the spatially separated commonly-addressed light emitting areas of at least one independently-addressable light emitting element lie substantially along a first dimension, and the spatially separated commonly-addressed light emitting areas of at least one

other independently-addressable light emitting element lie substantially along a second dimension of the display.

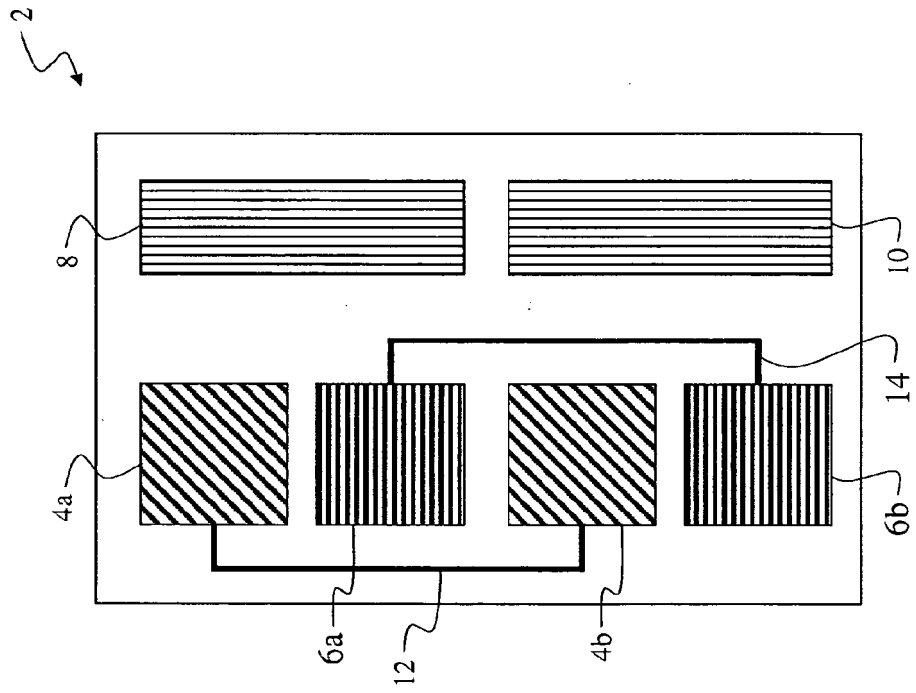


FIG. 1

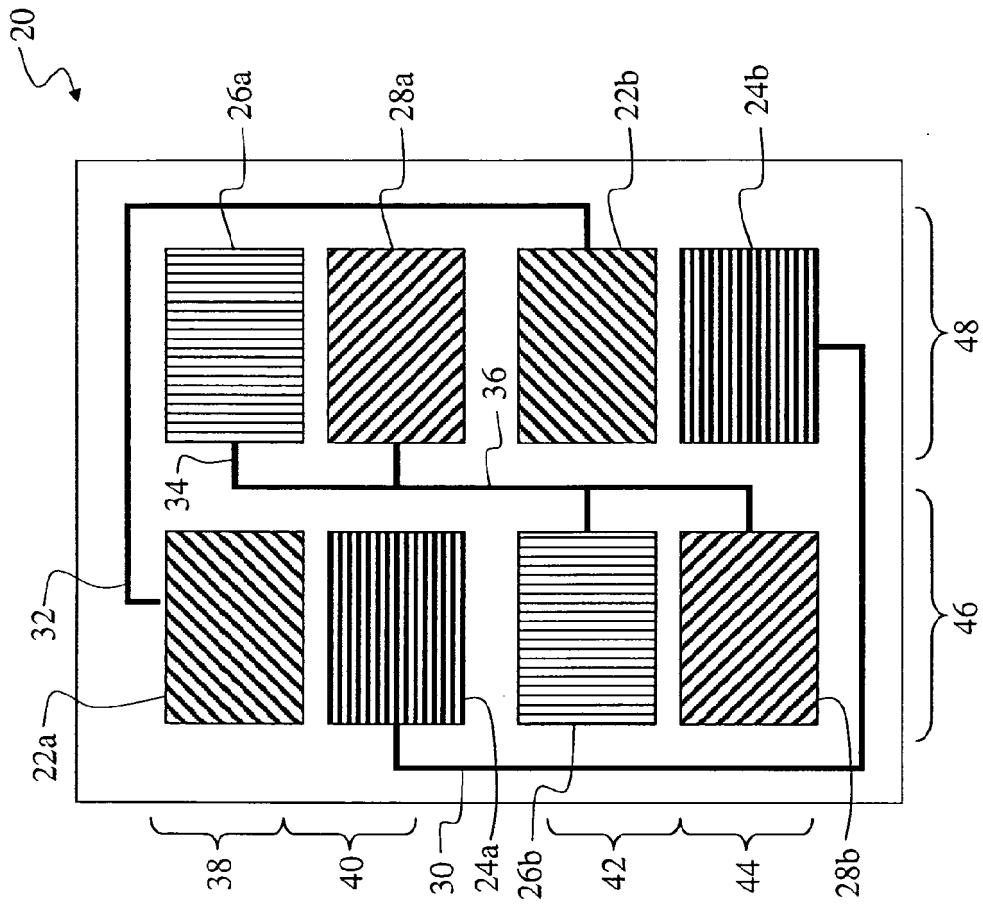


FIG. 2

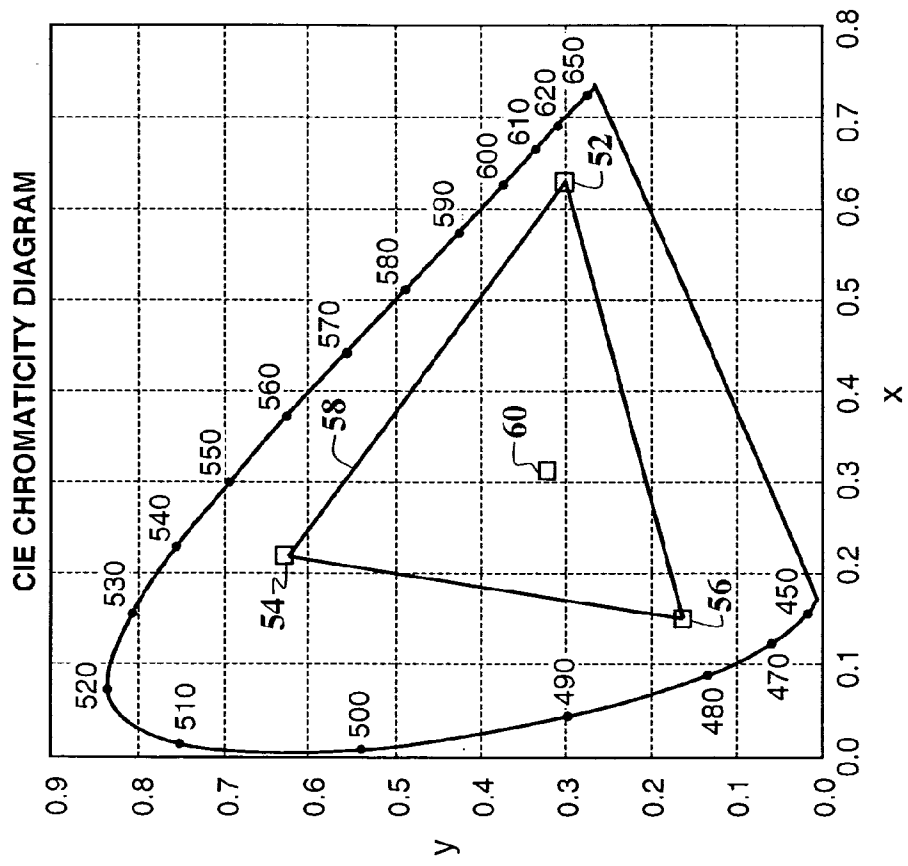


FIG. 3

68

70a	72a	74a	70b
74b	76a	70c	72b
76b	70d	72c	76c
72d	74c	70e	72e

FIG. 4

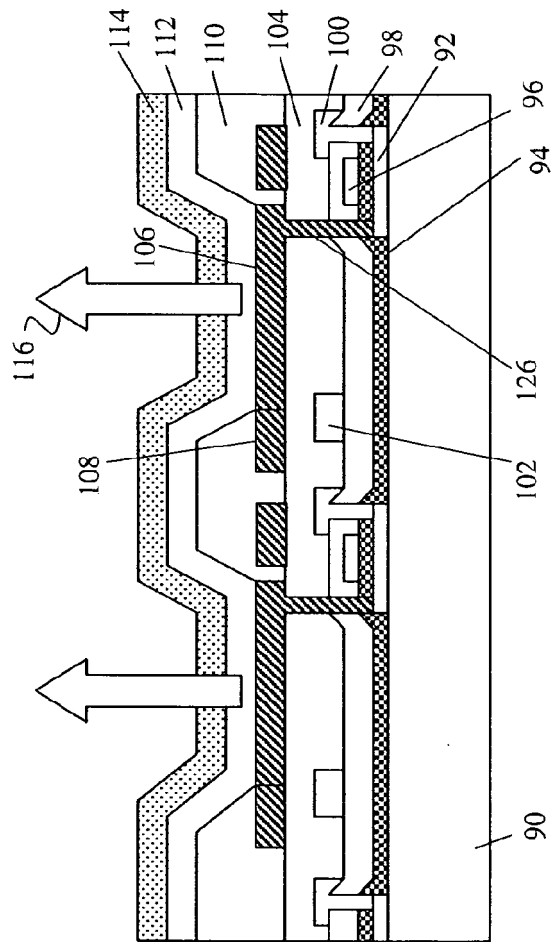


FIG. 5

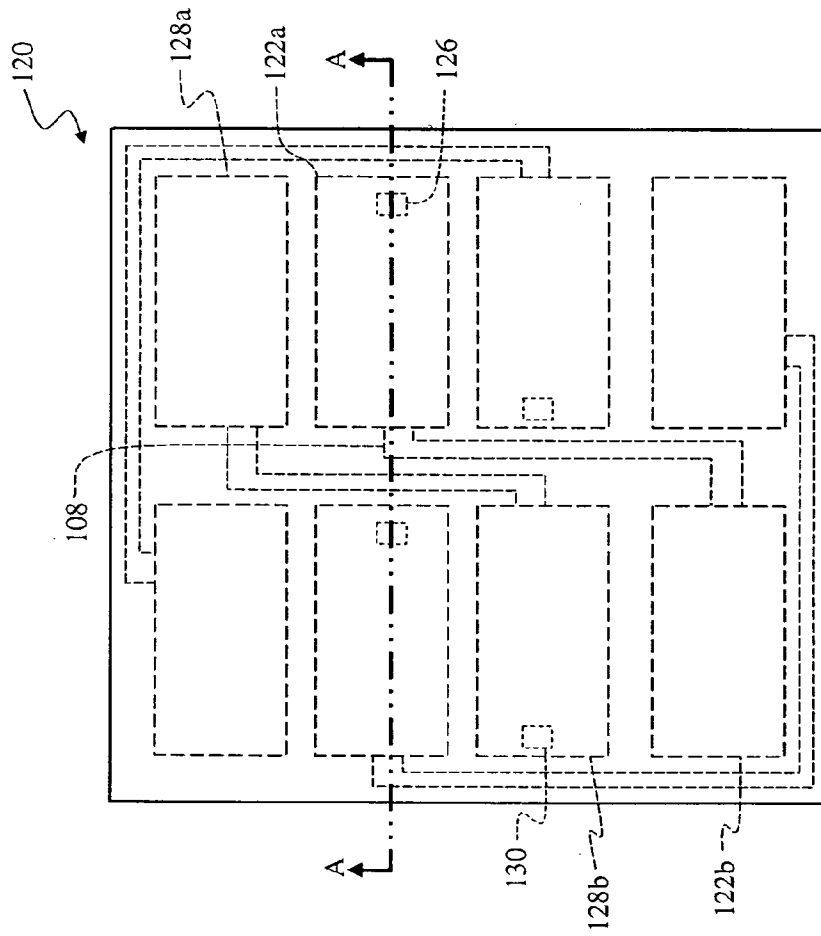


FIG. 6

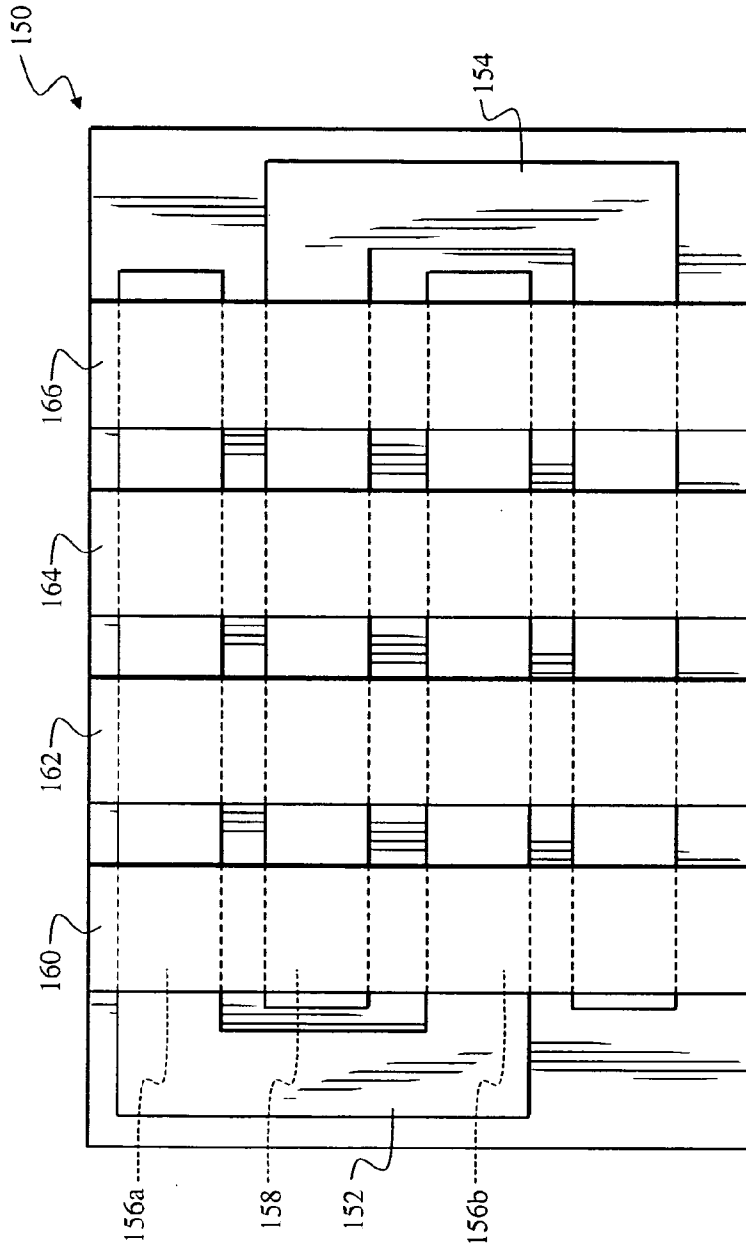


FIG. 7

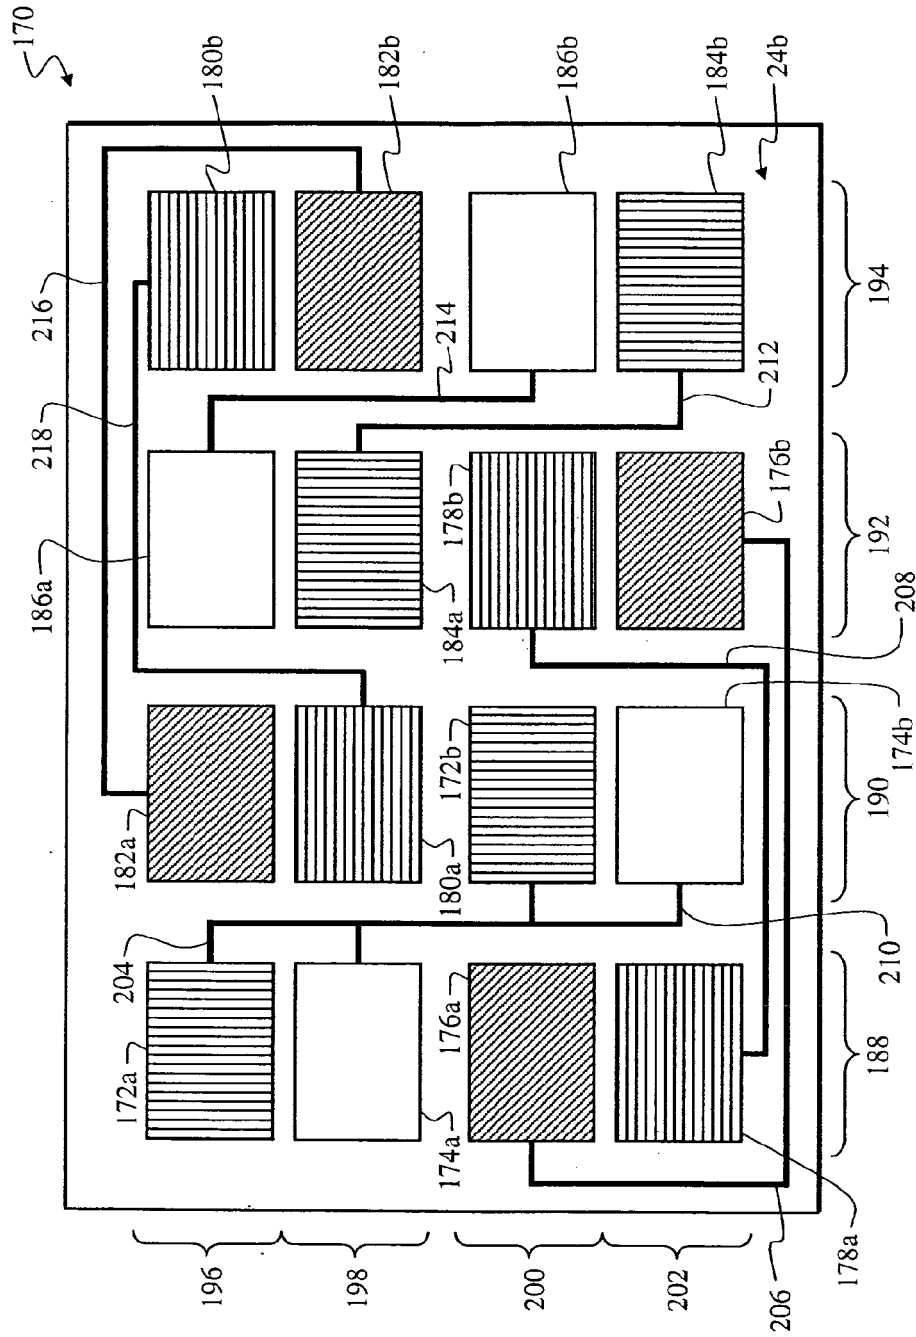


FIG. 8

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/025473

A. CLASSIFICATION OF SUBJECT MATTER INV. G09G3/20				
According to International Patent Classification (IPC) or to both national classification and IPC				
B. FIELDS SEARCHED				
Minimum documentation searched (classification system followed by classification symbols) G09G G02F				
Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched				
Electronic data base consulted during the international search (name of data base and, where practical, search terms used) EPO-Internal, WPI Data				
C. DOCUMENTS CONSIDERED TO BE RELEVANT				
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.		
X	US 2005/168423 A1 (HIRATA MITSUAKI [JP] ET AL) 4 August 2005 (2005-08-04) figures 3-7, 9-12 paragraphs [0008] - [0015] paragraphs [0059], [0061], [0062], [0068] - [0078] paragraphs [0092], [0094], [0101], [0102], [0118]	1-20		
X	WO 2005/059875 A (KONINKL PHILIPS ELECTRONICS NV [NL]; VAN DIJK ROY [NL]) 30 June 2005 (2005-06-30) page 5, lines 10-26 page 6, lines 12-17 figures 1,2,6 ----- -/--	1		
<input checked="" type="checkbox"/> Further documents are listed in the continuation of Box C.				
<input checked="" type="checkbox"/> See patent family annex.				
* Special categories of cited documents :				
<table style="width: 100%; border: none;"> <tr> <td style="width: 50%; border: none; vertical-align: top;"> *A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed </td> <td style="width: 50%; border: none; vertical-align: top;"> *T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family </td> </tr> </table>			*A* document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family
A document defining the general state of the art which is not considered to be of particular relevance *E* earlier document but published on or after the international filing date *L* document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified) *O* document referring to an oral disclosure, use, exhibition or other means *P* document published prior to the international filing date but later than the priority date claimed	*T* later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention *X* document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone *Y* document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art. *&* document member of the same patent family			
Date of the actual completion of the international search <p style="text-align: center;">28 March 2008</p>		Date of mailing of the international search report <p style="text-align: center;">04/04/2008</p>		
Name and mailing address of the ISA European Patent Office, P.B. 5818 Patentlaan 2 NL - 2280 HV Rijswijk Tel. (+31-70) 340-2040. Tx. 31 651 epo nl, Fax: (+31-70) 340-3016		Authorized officer <p style="text-align: center;">Taron, Laurent</p>		

INTERNATIONAL SEARCH REPORT

International application No
PCT/US2007/025473

C(Continuation). DOCUMENTS CONSIDERED TO BE RELEVANT		
Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X	WO 2005/001805 A (CLAIRVOYANTE INC [US]) 6 January 2005 (2005-01-06) figure 6 paragraph [0026]	1
X	WO 03/052725 A (CLAIRVOYANTE LAB INC [US]; BROWN ELLIOTT CANDICE HELLEN [US]; CREDELLE) 26 June 2003 (2003-06-26) figures 10,11 paragraphs [0032], [0033]	1
A	WO 2004/027503 A (SAMSUNG ELECTRONICS CO LTD [KR]; ROH NAM-SEOK [KR]; CHAE CHONG-CHUL [K]) 1 April 2004 (2004-04-01) page 2, lines 1-11 page 7, lines 8-14 page 8, lines 6-10 page 11, lines 13-22 page 13, lines 19-26 page 14, lines 4-11 figures 1-4,6,11-13	1-20
A	US 2002/015110 A1 (BROWN ELLIOTT CANDICE HELLEN [US]) 7 February 2002 (2002-02-07) figures 1,2 paragraphs [0006], [0040], [0041]	9

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No PCT/US2007/025473

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 2005168423 A1	04-08-2005	JP 2005208580 A	04-08-2005
WO 2005059875 A	30-06-2005	CN 1894735 A JP 2007522487 T KR 20060123321 A	10-01-2007 09-08-2007 01-12-2006
WO 2005001805 A	06-01-2005	EP 1647008 A1 JP 2006527399 T KR 20060015639 A	19-04-2006 30-11-2006 17-02-2006
WO 03052725 A	26-06-2003	AU 2002353138 A1 TW 278798 B	30-06-2003 11-04-2007
WO 2004027503 A	01-04-2004	AU 2002353574 A1 CN 1668969 A JP 2005539270 T KR 20040025063 A US 2007040952 A1	08-04-2004 14-09-2005 22-12-2005 24-03-2004 22-02-2007
US 2002015110 A1	07-02-2002	US 2005248262 A1 US 7274383 B1	10-11-2005 25-09-2007

专利名称(译)	电子显示器均匀性提高		
公开(公告)号	EP2100287A1	公开(公告)日	2009-09-16
申请号	EP2007862842	申请日	2007-12-13
[标]申请(专利权)人(译)	伊斯曼柯达公司		
申请(专利权)人(译)	伊士曼柯达公司		
当前申请(专利权)人(译)	全球OLED科技有限责任公司		
[标]发明人	MILLER MICHAEL EUGENE KANE PAUL JAMES MURDOCH MICHAEL JOHN		
发明人	MILLER, MICHAEL, EUGENE KANE, PAUL, JAMES MURDOCH, MICHAEL, JOHN		
IPC分类号	G09G3/20		
CPC分类号	G09G3/22 G09G3/20 G09G3/3208 G09G2300/0452 G09G2320/0233 G09G2320/0242		
优先权	11/616330 2006-12-27 US		
其他公开文献	EP2100287B1		
外部链接	Espacenet		

摘要(译)

一种具有改善的视觉均匀性的显示器，包括可独立寻址的发光元件阵列，包括至少一个用于产生第一颜色光的第一可独立寻址的发光元件和一个用于第二颜色的可独立寻址的发光元件。产生第二种颜色的光;其中至少第一可独立寻址的发光元件被细分为至少两个在空间上分开的共同寻址的发光区域，并且其中第二可独立寻址的发光元件的至少一部分位于空间上分开的共同发光区域之间第一可独立寻址的发光元件的对应发光区域。