



US008920411B2

(12) **United States Patent**
Gelbart et al.

(10) **Patent No.:** **US 8,920,411 B2**
(45) **Date of Patent:** **Dec. 30, 2014**

(54) **APPARATUS AND METHOD FOR
INTRA-CARDIAC MAPPING AND ABLATION**

(75) Inventors: **Daniel Gelbart**, Vancouver (CA);
Samuel Victor Lichtenstein, Vancouver
(CA)

(73) Assignee: **Kardium Inc.**, Burnaby, CA (US)

(*) Notice: Subject to any disclaimer, the term of this
patent is extended or adjusted under 35
U.S.C. 154(b) by 1249 days.

(21) Appl. No.: **11/475,950**

(22) Filed: **Jun. 28, 2006**

(65) **Prior Publication Data**

US 2008/0004534 A1 Jan. 3, 2008

(51) **Int. Cl.**

- A61B 18/08* (2006.01)
- A61B 18/12* (2006.01)
- A61B 5/028* (2006.01)
- A61B 5/00* (2006.01)
- A61B 5/029* (2006.01)
- A61B 18/10* (2006.01)
- A61B 18/18* (2006.01)
- A61B 18/00* (2006.01)
- A61B 18/02* (2006.01)
- A61B 18/14* (2006.01)
- A61B 18/20* (2006.01)

(52) **U.S. Cl.**

CPC *A61B 5/028* (2013.01); *A61B 18/18*
(2013.01); *A61B 2018/00642* (2013.01); *A61B*
2018/00577 (2013.01); *A61B 2018/00714*
(2013.01); *A61B 2018/0212* (2013.01); *A61B*
2018/0022 (2013.01); *A61B 2018/0237*
(2013.01); *A61B 2018/00791* (2013.01); *A61B*
2018/1407 (2013.01); *A61B 18/1492* (2013.01);
A61B 18/20 (2013.01); *A61B 2562/046*
(2013.01); *A61B 5/6853* (2013.01); *A61B*
5/029 (2013.01); *A61B 18/10* (2013.01)

USPC **606/34**

(58) **Field of Classification Search**

USPC **606/32-50**
See application file for complete search history.

(56) **References Cited**

U.S. PATENT DOCUMENTS

4,114,202 A 9/1978 Roy et al. 3/1.5
4,164,046 A 8/1979 Cooley 3/1.5

(Continued)

FOREIGN PATENT DOCUMENTS

EP 0723467 4/2002
WO 9510320 4/1995

(Continued)

OTHER PUBLICATIONS

Buchbinder, Maurice, MD, "Dynamic Mitral Valve Annuloplasty: A Reshapable Ring for Residual and Recurring MR," from the Foundation for Cardiovascular Medicine, La Jolla, CA. May 24, 2007.

(Continued)


Primary Examiner — Ronald Hupczey, Jr.

(74) *Attorney, Agent, or Firm* — Rossi, Kimms & McDowell LLP

(57) **ABSTRACT**

An intra-cardiac mapping system is based on locating the ports through which blood flows in or out the heart chambers. For many procedures, such as ablation to cure atrial fibrillation, locating the pulmonary veins and the mitral valve accurately allows to perform a Maze procedure. The location of the ports and valves is based on using the convective cooling effect of the blood flow. The mapping can be performed by a catheter-deployed expandable net or a scanning catheter. The same net or catheter can also perform the ablation procedure.

1 Claim, 8 Drawing Sheets

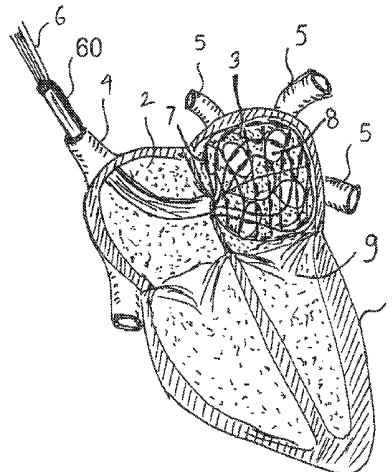

(56)

References Cited

U.S. PATENT DOCUMENTS

4,225,148 A	9/1980	Andersson	5,782,879 A	7/1998	Rosborough et al.	607/6
4,240,441 A	12/1980	Khalil	5,800,495 A	9/1998	Machek et al.	
4,263,680 A	4/1981	Reul et al.	5,824,066 A	10/1998	Gross	623/2
4,273,128 A	6/1981	Lary	5,836,990 A	11/1998	Li	607/28
4,411,266 A	10/1983	Cosman	5,868,755 A	2/1999	Kanner et al.	
4,490,859 A	1/1985	Black et al.	5,876,343 A	3/1999	Teo	
4,543,090 A	9/1985	McCoy	5,881,727 A	3/1999	Edwards	
4,699,147 A	10/1987	Chilson et al.	5,891,136 A	4/1999	McGee et al.	
4,770,187 A	9/1988	Lash et al.	5,904,711 A	5/1999	Flom et al.	607/129
4,787,369 A	11/1988	Allred, III et al.	5,916,163 A	6/1999	Panescu et al.	
4,794,912 A	1/1989	Lia	5,919,207 A	7/1999	Taheri	606/219
4,850,957 A	7/1989	Summers	5,921,924 A	7/1999	Avitall	
4,887,613 A	12/1989	Farr et al.	5,935,075 A	8/1999	Casscells et al.	600/474
4,890,602 A	1/1990	Hake	5,935,079 A *	8/1999	Swanson et al.	600/509
4,890,612 A	1/1990	Kensey	5,941,251 A	8/1999	Panescu et al.	
4,893,613 A	1/1990	Hake	5,961,440 A	10/1999	Schweich, Jr. et al.	600/16
4,895,166 A	1/1990	Farr et al.	5,968,040 A	10/1999	Swanson et al.	
4,921,499 A	5/1990	Hoffman et al.	5,984,950 A	11/1999	Cragg et al.	606/216
4,940,064 A	7/1990	Desai	6,001,069 A	12/1999	Tachibana et al.	601/2
4,942,788 A	7/1990	Farr et al.	6,001,093 A	12/1999	Swanson et al.	
4,979,514 A	12/1990	Sekii et al.	6,014,581 A	1/2000	Whayne et al.	
4,998,933 A	3/1991	Eggers et al.	6,036,689 A	3/2000	Tu et al.	
5,026,384 A	6/1991	Farr et al.	6,063,082 A	5/2000	DeVore et al.	
5,047,047 A	9/1991	Yoon	6,104,944 A	8/2000	Martinelli	600/424
5,122,137 A	6/1992	Lennox	6,106,522 A	8/2000	Fleischman et al.	
5,127,902 A	7/1992	Fischell	6,123,702 A	9/2000	Swanson et al.	
5,156,151 A	10/1992	Imran	6,138,043 A	10/2000	Avitall	
5,174,299 A *	12/1992	Nelson	6,142,993 A	11/2000	Whayne et al.	
5,176,693 A	1/1993	Pannek, Jr.	6,156,046 A	12/2000	Passafaro et al.	606/159
5,178,620 A	1/1993	Eggers et al.	6,210,432 B1	4/2001	Solem et al.	623/1.15
5,192,291 A	3/1993	Pannek, Jr.	6,216,043 B1	4/2001	Swanson et al.	
5,201,316 A	4/1993	Pomeranz et al.	6,217,573 B1	4/2001	Webster	606/41
5,228,442 A	7/1993	Imran	6,241,747 B1	6/2001	Ruff	606/216
5,242,386 A	9/1993	Holzer	6,248,124 B1	6/2001	Pedros et al.	606/213
5,245,987 A	9/1993	Redmond et al.	6,258,258 B1	7/2001	Sartori et al.	208/263
5,255,679 A	10/1993	Imran	6,266,550 B1	7/2001	Selmon et al.	
5,279,299 A	1/1994	Imran	6,304,769 B1	10/2001	Arenson et al.	600/424
5,293,869 A	3/1994	Edwards et al.	6,306,135 B1	10/2001	Ellman et al.	606/45
5,312,435 A	5/1994	Nash et al.	6,308,091 B1	10/2001	Avitall	
5,317,952 A	6/1994	Immega	6,319,249 B1	11/2001	Töllner	
5,324,284 A	6/1994	Imran	6,322,559 B1	11/2001	Daulton et al.	
5,327,889 A	7/1994	Imran	6,346,105 B1	2/2002	Tu et al.	606/41
5,341,807 A	8/1994	Nardella	6,350,263 B1	2/2002	Wetzig et al.	
5,345,936 A	9/1994	Pomeranz et al.	6,358,258 B1	3/2002	Arcia et al.	
5,366,443 A	11/1994	Eggers et al.	6,383,151 B1	5/2002	Diederich	
5,379,773 A	1/1995	Hornsby	6,389,311 B1 *	5/2002	Whayne et al.	600/523
5,397,321 A	3/1995	Houser et al.	6,391,024 B1	5/2002	Sun et al.	
5,419,767 A	5/1995	Eggers et al.	6,391,048 B1	5/2002	Ginn et al.	606/213
5,450,860 A	9/1995	O'Connor	6,391,054 B2	5/2002	Carpentier et al.	623/2.37
5,465,717 A	11/1995	Imran et al.	6,402,781 B1	6/2002	Langberg et al.	623/2.36
5,478,353 A	12/1995	Yoon	6,436,052 B1	8/2002	Nikolic et al.	600/529
5,496,267 A	3/1996	Drasler et al.	6,475,223 B1	11/2002	Werp et al.	606/108
5,531,760 A	7/1996	Alwafaie	6,485,409 B1	11/2002	Voloshin et al.	600/115
5,545,193 A	8/1996	Fleischman et al.	6,485,482 B1	11/2002	Belef	
5,557,967 A	9/1996	Renger	6,485,489 B2	11/2002	Teirstein et al.	606/41
5,575,810 A	11/1996	Swanson et al.	6,506,210 B1	1/2003	Kanner	606/213
5,593,424 A	1/1997	Northrup, III	6,514,249 B1	2/2003	Maguire et al.	
5,598,848 A	2/1997	Swanson et al.	6,529,756 B1	3/2003	Phan et al.	
5,599,345 A	2/1997	Edwards et al.	6,537,198 B1	3/2003	Vidlund et al.	600/16
5,620,481 A	4/1997	Desai et al.	6,537,314 B2	3/2003	Langberg et al.	623/2.36
5,662,587 A	9/1997	Grundfest et al.	6,540,670 B1	4/2003	Hirata et al.	600/152
5,681,308 A	10/1997	Edwards et al.	6,551,312 B2	4/2003	Zhang et al.	606/41
5,681,336 A	10/1997	Clement et al.	6,569,160 B1	5/2003	Goldin et al.	606/41
5,687,723 A	11/1997	Avitall	6,569,198 B1	5/2003	Wilson et al.	623/2.37
5,687,737 A	11/1997	Branham et al.	6,575,971 B2	6/2003	Hauck et al.	606/52
5,697,285 A	12/1997	Nappi et al.	6,589,208 B2	7/2003	Ewers et al.	604/104
5,713,896 A	2/1998	Nardella	6,626,930 B1	9/2003	Allen et al.	606/213
5,713,942 A	2/1998	Stern et al.	6,632,238 B2	10/2003	Ginn et al.	606/213
5,716,397 A	2/1998	Myers	6,635,056 B2	10/2003	Kadhiresan et al.	
5,720,726 A	2/1998	Marcadis et al.	6,640,119 B1	10/2003	Budd et al.	
5,728,114 A	3/1998	Evans et al.	6,662,034 B2	12/2003	Segner et al.	600/373
5,730,127 A	3/1998	Avitall	6,704,590 B2	3/2004	Haldeman	
5,762,066 A	6/1998	Law et al.	6,723,038 B1	4/2004	Schroeder et al.	600/16
5,769,846 A *	6/1998	Edwards et al.	6,726,716 B2	4/2004	Marquez	623/2.36
5,782,239 A	7/1998	Webster	6,760,616 B2	7/2004	Hoey et al.	600/547
			6,780,197 B2	8/2004	Roe et al.	606/213
			6,788,969 B2	9/2004	Dupree et al.	
			6,797,001 B2	9/2004	Mathis et al.	623/2.37
			6,800,090 B2	10/2004	Alferness et al.	623/2.36

(56)

References Cited

U.S. PATENT DOCUMENTS

6,824,562 B2	11/2004	Mathis et al.	2003/0105384 A1	6/2003	Sharkey et al.	600/16
6,837,886 B2	1/2005	Collins et al.	2003/0105520 A1	6/2003	Alferness et al.	623/2.36
6,852,076 B2	2/2005	Nikolic et al.	2003/0109770 A1	6/2003	Sharkey et al.	600/16
6,855,143 B2	2/2005	Davison et al.	2003/0176810 A1	9/2003	Maahs et al.	
6,890,353 B2	5/2005	Cohn et al.	2003/0181819 A1	9/2003	Desai	
6,892,091 B1	5/2005	Ben-Haim et al.	2003/0229395 A1	12/2003	Cox	
6,899,674 B2	5/2005	Viebach et al.	2004/0002626 A1	1/2004	Feld et al.	600/37
6,907,297 B2	6/2005	Wellman et al.	2004/0054279 A1	3/2004	Hanley	600/424
6,908,478 B2	6/2005	Alferness et al.	2004/0133220 A1	7/2004	Lashinski et al.	
6,913,576 B2*	7/2005	Bowman	2004/0133273 A1	7/2004	Cox	623/2.11
6,918,903 B2	7/2005	Bass	2004/0138744 A1	7/2004	Lashinski et al.	
6,926,669 B1	8/2005	Stewart et al.	2004/0153146 A1	8/2004	Lashinski et al.	623/2.36
6,942,657 B2	9/2005	Sinofsky et al.	2004/0158321 A1	8/2004	Reuter et al.	623/2.36
6,949,122 B2	9/2005	Adams et al.	2004/0176797 A1	9/2004	Opolski	606/213
6,960,206 B2	11/2005	Keane	2004/0186566 A1	9/2004	Hindrichs et al.	623/2.37
6,960,229 B2	11/2005	Mathis et al.	2004/0215232 A1	10/2004	Belhe et al.	606/213
6,986,775 B2	1/2006	Morales et al.	2004/0243170 A1	12/2004	Suresh et al.	606/198
6,989,010 B2	1/2006	Francischelli et al.	2004/0249408 A1	12/2004	Murphy et al.	606/198
6,989,028 B2	1/2006	Lashinski et al.	2004/0249453 A1	12/2004	Cartledge et al.	623/2.37
6,994,093 B2	2/2006	Murphy et al.	2004/0267358 A1	12/2004	Reitan	623/2.37
6,997,951 B2	2/2006	Solem et al.	2005/0004668 A1	1/2005	Aklog et al.	
7,001,383 B2	2/2006	Keidar	2005/0015109 A1	1/2005	Lichtenstein	606/200
7,025,776 B1	4/2006	Houser et al.	2005/0054938 A1	3/2005	Wehman et al.	600/483
7,048,734 B1	5/2006	Fleischman et al.	2005/0055089 A1	3/2005	Macoviak et al.	623/2.37
7,050,848 B2	5/2006	Hoey et al.	2005/0060030 A1	3/2005	Lashinski et al.	623/2.37
7,052,487 B2	5/2006	Cohn et al.	2005/0064665 A1	3/2005	Han	
7,068,867 B2	6/2006	Adoram et al.	2005/0065420 A1	3/2005	Collins et al.	
7,141,019 B2	11/2006	Pearlman	2005/0065504 A1	3/2005	Melsky et al.	
7,144,363 B2	12/2006	Pai et al.	2005/0080402 A1	4/2005	Santamore et al.	606/1
7,166,127 B2	1/2007	Spence et al.	2005/0096047 A1	5/2005	Haberman et al.	455/432.3
7,177,677 B2	2/2007	Kaula et al.	2005/0096647 A1	5/2005	Steinke et al.	606/41
7,186,210 B2	3/2007	Feld et al.	2005/0107723 A1	5/2005	Wehman et al.	600/595
7,187,964 B2	3/2007	Khoury	2005/0107871 A1	5/2005	Realyvasquez et al.	623/2.11
7,189,202 B2	3/2007	Lau et al.	2005/0125030 A1	6/2005	Forsberg et al.	606/213
7,276,044 B2	10/2007	Ferry et al.	2005/0148892 A1	7/2005	Desai	
7,279,007 B2	10/2007	Nikolic et al.	2005/0149014 A1	7/2005	Hauck et al.	606/41
7,300,435 B2	11/2007	Wham et al.	2005/0149159 A1	7/2005	Andreas et al.	
7,303,526 B2	12/2007	Sharkey et al.	2005/0154252 A1	7/2005	Sharkey et al.	600/37
7,335,196 B2	2/2008	Swanson et al.	2005/0182365 A1	8/2005	Hennemann et al.	604/113
7,507,252 B2	3/2009	Lashinski et al.	2005/0187620 A1	8/2005	Pai et al.	623/2.37
7,530,980 B2	5/2009	Hooven	2005/0197593 A1	9/2005	Burbank et al.	
7,736,388 B2	6/2010	Goldfarb et al.	2005/0197692 A1	9/2005	Pai et al.	623/2.1
7,738,967 B2*	6/2010	Salo	2005/0197693 A1	9/2005	Pai et al.	623/2.1
8,103,338 B2	1/2012	Harlev et al.	2005/0197694 A1	9/2005	Pai et al.	623/2.1
8,118,853 B2	2/2012	Grew	2005/0203558 A1	9/2005	Maschke	606/180
8,150,499 B2	4/2012	Gelbart et al.	2005/0209636 A1	9/2005	Widomski et al.	606/213
8,224,432 B2	7/2012	MacAdam et al.	2005/0216054 A1	9/2005	Widomski et al.	606/213
2001/0003158 A1	6/2001	Kensley et al.	2005/0240249 A1	10/2005	Tu et al.	607/96
2001/0005787 A1	6/2001	Oz et al.	2005/0251116 A1	11/2005	Steinke et al.	606/8
2001/0018611 A1	8/2001	Solem et al.	2005/0251132 A1	11/2005	Oral et al.	
2001/0020126 A1	9/2001	Swanson et al.	2005/0256521 A1	11/2005	Kozel	
2001/0021867 A1	9/2001	Kordis et al.	2005/0267574 A1	12/2005	Cohn et al.	623/2.36
2002/0002329 A1	1/2002	Avitall	2006/0009755 A1	1/2006	Sra	
2002/0016628 A1	2/2002	Langberg et al.	2006/0009756 A1	1/2006	Francischelli et al.	
2002/0087156 A1*	7/2002	Maguire et al.	2006/0014998 A1	1/2006	Sharkey et al.	600/16
2002/0087173 A1	7/2002	Alferness et al.	2006/0015002 A1	1/2006	Moaddeb et al.	600/37
2002/0099415 A1	7/2002	Panescu et al.	2006/0015003 A1	1/2006	Moaddes et al.	600/37
2002/0107478 A1	8/2002	Wendlandt	2006/0015038 A1	1/2006	Weymarn-Scharli	600/585
2002/0107511 A1	8/2002	Collins et al.	2006/0015096 A1	1/2006	Hauck et al.	
2002/0107530 A1	8/2002	Sauer et al.	2006/0025800 A1	2/2006	Suresh	606/198
2002/0115941 A1	8/2002	Whayne et al.	2006/0030881 A1	2/2006	Sharkey et al.	606/213
2002/0115944 A1	8/2002	Mendes et al.	2006/0085049 A1	4/2006	Cory et al.	
2002/0169504 A1	11/2002	Alferness et al.	2006/0089637 A1	4/2006	Werneth et al.	
2002/0177782 A1	11/2002	Penner	2006/0100618 A1	5/2006	Chan et al.	
2002/0183836 A1	12/2002	Liddicoat et al.	2006/0135968 A1	6/2006	Schaller	606/144
2002/0183841 A1	12/2002	Cohn et al.	2006/0135970 A1	6/2006	Schaller	606/152
2002/0188170 A1	12/2002	Santamore et al.	2006/0184242 A1	8/2006	Lichtenstein	623/2.37
2003/0028118 A1	2/2003	Dupree et al.	2006/0199995 A1	9/2006	Vijay	600/37
2003/0028183 A1	2/2003	Sanchez et al.	2006/0229491 A1	10/2006	Sharkey et al.	600/37
2003/0050685 A1	3/2003	Nikolic et al.	2006/0235286 A1	10/2006	Stone et al.	600/381
2003/0055420 A1	3/2003	Kadhiresan et al.	2006/0235314 A1	10/2006	Migliuolo et al.	
2003/0069570 A1	4/2003	Witzel et al.	2006/0264980 A1	11/2006	Khairkahan et al.	606/153
2003/0069636 A1	4/2003	Solem et al.	2006/0281965 A1	12/2006	Khairkahan et al.	600/37
2003/0078465 A1	4/2003	Pai et al.	2006/0293698 A1	12/2006	Douk	606/142
2003/0078671 A1	4/2003	Lesniak et al.	2006/0293725 A1	12/2006	Rubinsky et al.	607/72
			2007/0016068 A1	1/2007	Grunwald et al.	
			2007/0027533 A1	2/2007	Douk	
			2007/0038208 A1	2/2007	Kefer	606/34
			2007/0083193 A1	4/2007	Werneth et al.	

(56)

References Cited

U.S. PATENT DOCUMENTS

2007/0083195	A1	4/2007	Werneth et al.	
2007/0088362	A1	4/2007	Bonutti et al.	606/99
2007/0115390	A1	5/2007	Makara et al.	
2007/0118215	A1	5/2007	Moaddeb	623/2.37
2007/0129717	A1	6/2007	Brown, III et al.	
2007/0161846	A1	7/2007	Nikolic et al.	600/16
2007/0198058	A1	8/2007	Gelbart et al.	
2007/0213578	A1	9/2007	Khairkahan et al.	600/16
2007/0213815	A1	9/2007	Khairkahan et al.	623/3.1
2007/0232858	A1	10/2007	MacNamara et al.	
2007/0249999	A1	10/2007	Sklar et al.	604/101.05
2007/0270688	A1	11/2007	Gelbart et al.	600/427
2007/0299343	A1	12/2007	Waters	600/443
2008/0004534	A1	1/2008	Gelbart et al.	
2008/0004643	A1	1/2008	To et al.	606/159
2008/0004697	A1	1/2008	Lichtenstein et al.	
2008/0045778	A1	2/2008	Lichtenstein et al.	
2008/0071298	A1	3/2008	Khairkahan et al.	606/151
2008/0281322	A1	11/2008	Sherman et al.	
2008/0312713	A1	12/2008	Wilfley et al.	607/41
2009/0018617	A1	1/2009	Skelton et al.	
2009/0069704	A1	3/2009	MacAdam et al.	
2009/0131930	A1	5/2009	Gelbart et al.	
2009/0157058	A1	6/2009	Ferren et al.	604/891.1
2009/0192441	A1	7/2009	Gelbart et al.	604/22
2009/0270737	A1	10/2009	Thornton	
2009/0287271	A1	11/2009	Blum et al.	
2009/0287304	A1	11/2009	Dahlgren et al.	623/2.37
2010/0121147	A1	5/2010	Oskin et al.	
2010/0211052	A1	8/2010	Brown et al.	
2010/0249771	A1	9/2010	Pearson et al.	
2010/0268059	A1	10/2010	Ryu et al.	
2011/0125172	A1	5/2011	Gelbart et al.	606/159
2011/0172658	A1	7/2011	Gelbart et al.	
2011/0282491	A1	11/2011	Prisco et al.	
2012/0158016	A1	6/2012	Gelbart et al.	
2012/0165829	A1	6/2012	Chen et al.	
2013/0172883	A1	7/2013	Lopes et al.	
2013/0178850	A1	7/2013	Lopes et al.	
2013/0178851	A1	7/2013	Lopes et al.	
2013/0184705	A1	7/2013	Gelbart et al.	
2013/0184706	A1	7/2013	Gelbart et al.	
2013/0190587	A1	7/2013	Lopes et al.	
2013/0197513	A1	8/2013	Lopes et al.	
2013/0304065	A1	11/2013	Lopes et al.	
2014/0114307	A1	4/2014	Moisa et al.	

FOREIGN PATENT DOCUMENTS

WO	95/20349	A1	8/1995
WO	97/17892	A1	5/1997
WO	03/015611		2/2003
WO	03/077800		9/2003
WO	2004/012629		2/2004
WO	2004/047679		6/2004
WO	2004/084746		10/2004
WO	2004/100803		11/2004
WO	2005/070330		8/2005
WO	2005/102181		11/2005
WO	2006/017809		2/2006
WO	2006/105121		10/2006
WO	2006/135747		12/2006
WO	2006/135749		12/2006
WO	2007/021647		2/2007
WO	2007/115390		10/2007
WO	2008/002606		1/2008
WO	2009/065042		5/2009
WO	2012/100184	A2	7/2012
WO	2012/100185	A2	7/2012
WO	2013/173917	A1	11/2013

OTHER PUBLICATIONS

Gelbart et al., "Automatic Atherectomy System," Office Action mailed Mar. 4, 2009 for U.S. Appl. No. 11/436,584, 7 pages.

Gelbart et al., "Automatic Atherectomy System," Office Action mailed Dec. 1, 2009 for U.S. Appl. No. 11/436,584, 10 pages.

International Search Report, mailed Dec. 5, 2007, for PCT/US2007/014902, 5 pages.

International Search Report, mailed Dec. 2, 2009, for PCT/US2008/083644, 5 pages.

International Preliminary Report on Patentability, issued Jan. 6, 2009, for PCT/US2007/014902, 8 pages.

Konings et al., "Development of an Intravascular Impedance Catheter for Detection of Fatty Lesions in Arteries," IEEE Transactions on Medical Imaging, 16(4):439-446, 1997.

Mack, "New Techniques for Percutaneous Repair of the Mitral Valve," Heart Failure Review, 11:259-268, 2006.

Otasevic et al., "First-in-Man Implantation of Left Ventricular Partitioning Device in a Patient With Chronic Heart Failure: Twelve-Month Follow-up," Journal of Cardiac Failure 13(7):517-520, 2007.

Sharkey et al., "Left Ventricular Apex Occluder. Description of a Ventricular Partitioning Device," EuroIntervention 2:125-127, 2006.

Stiles, et al., "Simulated Characterization of Atherosclerotic Lesions in the Coronary Arteries by Measurement of Bioimpedance", IEEE Transactions on Biomedical Engineering, 50(7):916-921, 2003.

Tanaka et al., "Artificial SMA Valve for Treatment of Urinary Incontinence: Upgrading of Valve and Introduction of Transcutaneous Transformer," Bio-Medical Materials and Engineering 9:97-112, 1999.

Timek et al., "Septal-Lateral Annular Cinching ('SLAC') Reduces Mitral Annular Size Without Perturbing Normal Annular Dynamics," Journal of Heart Valve Disease 11(1):2-10, 2002.

Timek et al., "Septal-Lateral Annular Cinching Abolishes Acute Ischemic Mitral Regurgitation," Journal of Thoracic and Cardiovascular Surgery, 123(5):881-888, 2002.

Valvano et al., "Thermal Conductivity and Diffusivity of Biomaterials Measured with Self-Heated Thermistors," International Journal of Thermodynamics, 6(3):301-311, 1985.

Written Opinion, mailed Dec. 5, 2007, for PCT/US2007/014902, 7 pages.

Written Opinion, mailed Dec. 2, 2009, for PCT/US2008/083644, 9 pages.

"Ablation of Atrial Fibrillation : Energy Sources and Navigation Tools: A Review" Ruediger Becker J. of Electrocardiology vol. 37 Supp.2004 pp. 55-61.

"Radiofrequency Catheter Ablation of Supraventricular Arrhythmias" Hugh Calkins Heart 2001 ; 85,594-600.

U.S. Appl. No. 11/941,819, filed Nov. 16, 2007, Gelbart et al.

De Ponti et al., "Non-Fluoroscopic Mapping Systems for Electrophysiology: The 'Tool or Toy' Dilemma After 10 Years," European Heart Journal 27:1134-1136, 2006.

Gabriel et al., "The Dielectric Properties of Biological Tissues: I. Literature Survey," Phys. Med. Biol. 41:2231-2249, 1996.

Lichtenstein, "Method and Apparatus for Percutaneous Reduction of Anterior-Posterior Diameter of Mitral Valve," U.S. Appl. No. 10/690,131, filed Oct. 20, 2003, 31 pages.

Gelbart et al., "Automatic Atherectomy System," Amendment filed Aug. 4, 2009 for U.S. Appl. No. 11/436,584, 35 pages.

Gelbart et al., "Automatic Atherectomy System," Amendment filed Mar. 30, 2010 for U.S. Appl. No. 11/436,584, 20 pages.

Gelbart et al., "Automatic Atherectomy System," Amendment filed Oct. 25, 2010 for U.S. Appl. No. 11/436,584, 9 pages.

Gelbart et al., "Automatic Atherectomy System," Office Action mailed Dec. 14, 2010 for U.S. Appl. No. 11/436,584, 12 pages.

Gelbart et al., "Automatic Atherectomy System," Office Action mailed Jun. 15, 2011, for U.S. Appl. No. 12/950,871, 16 pages.

Gelbart et al., "Medical Device for Use in Bodily Lumens, for Example an Atrium," Office Action mailed Jul. 25, 2011 for U.S. Appl. No. 11/941,819, 9 pages.

Gelbart et al., "Liposuction System," Office Action mailed Mar. 16, 2011 for U.S. Appl. No. 12/010,458, 12 pages.

Gelbart et al., "Liposuction System," Amendment filed Jun. 10, 2011 for U.S. Appl. No. 12/010,458, 10 pages.

International Search Report and Written Opinion mailed Aug. 2, 2013 issued in PCT/CA2013/050350.

International Search Report and Written Opinion mailed Sep. 17, 2013 issued in PCT/US2013/039982.

(56)

References Cited

OTHER PUBLICATIONS

International Search Report and Written Opinion mailed Sep. 27, 2013 issued in PCT/US2013/039977.

Extended European Search Report mailed Aug. 20, 2013 issued in EP Patent Application No. 13172848.7.

"Phased RF Catheter Ablation System", 2014 Medtronic Inc., 2 pgs, <http://www.medtronic.eu/your-health/atrial-fibrillation/about-the-therapy/our-phased-rf-ablation-system/>[Jun. 24, 2014 2:38:05 PM].
 "ThermoCool® Irrigated Tip Catheter", Brochure, Biosense Webster, 4 pgs, Biosense Webster, Inc. 3333 Diamond Canyon Road Diamond Bar, CA 91765, USA, © Biosense Webster, Inc. 2009 All rights reserved. 1109003.0.

Biotronik's "AICath Flutter Gold Cath for Atrial Flutter Available in EU", medGadget, 3 pgs, <http://www.medgadget.com/2013/09/biotroniks-alcath-flutter-gold-cath-for-atrial-flutter-unveiled-in-europe.html>[Jun. 24, 2014 2:37:09 PM].

Extended European Search Report and EP search opinion for EP 12736677.1, mail date of Mar. 28, 2014, corresponding to PCT/US2012/022061.

Extended European Search Report and EP search opinion for EP 12736962.7, mail date of Mar. 28, 2014, corresponding to PCT/US2012/022062.

Gelbart et al., "Automatic Atherectomy System", Amendment filed Oct. 25, 2010 for U.S. Appl. No. 11/436,584, 9 pgs.

Gelbart et al., "Automatic Atherectomy System", Amendment filed Mar. 30, 2010 for U.S. Appl. No. 11/436,584, 20 pgs.

Gelbart et al., "Automatic Atherectomy System", Amendment filed Aug. 4, 2009 for U.S. Appl. No. 11/436,584, 35 pgs.

Gelbart et al., "Automatic Atherectomy System", Amendment filed Sep. 15, 2011 for U.S. Appl. No. 12/950,871, 21 pgs.

Gelbart et al., "Automatic Atherectomy System", Office Action mailed Jun. 15, 2011 for U.S. Appl. No. 12/950,871, 16 pgs.

Gelbart et al., "Automatic Atherectomy System", Office Action mailed Dec. 1, 2009 for U.S. Appl. No. 11/436,584, 8 pgs.

Gelbart et al., "Automatic Atherectomy System", Office Action mailed Dec. 14, 2010 for U.S. Appl. No. 11/436,584, 12 pgs.

Gelbart et al., "Automatic Atherectomy System", Office Action mailed Mar. 4, 2009 for U.S. Appl. No. 11/436,584, 6 pgs.

Bard, "HD Mesh Ablator Catheter", Brochure, 2008, 4 pgs, Bard Electrophysiology Division, C.R. Bard Inc., 55 Technology Drive Lowell, MA 01851 USA.

"Constellation Mapping Catheters", Brochure, Boston Scientific Corp., 2 pgs, © 2007 Boston Scientific Corporation.

Written opinion dated Jul. 30, 2012 for PCT/US2012/022062, 5 pgs.

Written opinion dated Aug. 22, 2012 for PCT/US2012/022061, 6 pgs.

International Search Report dated Aug. 22, 2012 for PCT/US2012/022061, 5 pgs.

International Search Report dated Jul. 30, 2012 for PCT/US2012/022062, 5 pgs.

Gelbart et al., "Medical Device for Use in Bodily Lumens, For Example an Atrium", Office Action mailed Jul. 25, 2011 for U.S. Appl. No. 11/941,819, now published as US 2009-0131930 A1.

Gelbart et al., "Liposuction System", Amendment filed Jun. 10, 2011 for U.S. Appl. No. 12/010,458, 10 pgs.

Gelbart et al., "Liposuction System", Amendment filed Dec. 7, 2011 for U.S. Appl. No. 12/010,458, 15 pgs.

Gelbart et al., "Liposuction System", Office Action mailed Mar. 16, 2011 for U.S. Appl. No. 12/010,458, 12 pgs.

Gelbart et al., "Liposuction System", Office Action mailed Sep. 14, 2011 for U.S. Appl. No. 12/010,458, 9 pgs.

"Waveforms and Segments", Ensite System Instructions for use, 54-06154-001 Rev02, Chapter 7, pp. 85-90 © 2007 St. Jude Medical.

Gelbart et al., "Medical Device for Use in Bodily Lumens, for Example an Atrium", Amendment filed Jul. 3, 2014 for U.S. Appl. No. 11/941,819, 10 pgs.

Gelbart et al., "Medical Device for use in Bodily Lumens, for Example an Atrium", Amendment filed Apr. 2, 2012 for U.S. Appl. No. 11/941,819, 24 pgs.

Gelbart et al., "Medical Device for use in Bodily Lumens, for Example an Atrium", Amendment filed Mar. 1, 2012 for U.S. Appl. No. 11/941,819, 23 pgs.

Gelbart et al., "Medical Device for use in Bodily Lumens, for Example an Atrium", Amendment filed Nov. 23, 2011 for U.S. Appl. No. 11/941,819, 17 pgs.

Gelbart et al., "Medical Device for use in Bodily Lumens, for Example an Atrium", Replacement drawings filed Feb. 13, 2008 for U.S. Appl. No. 11/941,819, 6 pgs.

Gelbart et al., "Medical Device for use in Bodily Lumens, for Example an Atrium", Office Action dated Jan. 3, 2012 for co-pending U.S. Appl. No. 11/941,819, 19 pgs.

Gelbart et al., "Medical Device for use in Bodily Lumens, for Example an Atrium", Office Action dated Apr. 3, 2014 for co-pending U.S. Appl. No. 11/941,819, 17 pgs.

Gelbart et al., "Medical Device for use in Bodily Lumens, for Example an Atrium", Notice of Allowance dated Aug. 26, 2014 for co-pending U.S. Appl. No. 11/941,819, 19 pgs.

Gelbart et al., "Medical Device for use in Bodily Lumens, for Example an Atrium", Supplemental Notice of Allowance dated Oct. 6, 2014 for co-pending U.S. Appl. No. 11/941,819, 4 pgs.

Gelbart et al., "Medical Device for use in Bodily Lumens, for Example an Atrium", Amendment filed Sep. 22, 2014, for co-pending U.S. Appl. No. 13/070,215, 18 pgs.

Gelbart et al., "Medical Device for use in Bodily Lumens, for Example an Atrium", Office Action dated Jun. 20, 2014, for co-pending U.S. Appl. No. 13/070,215, 8 pgs.

* cited by examiner

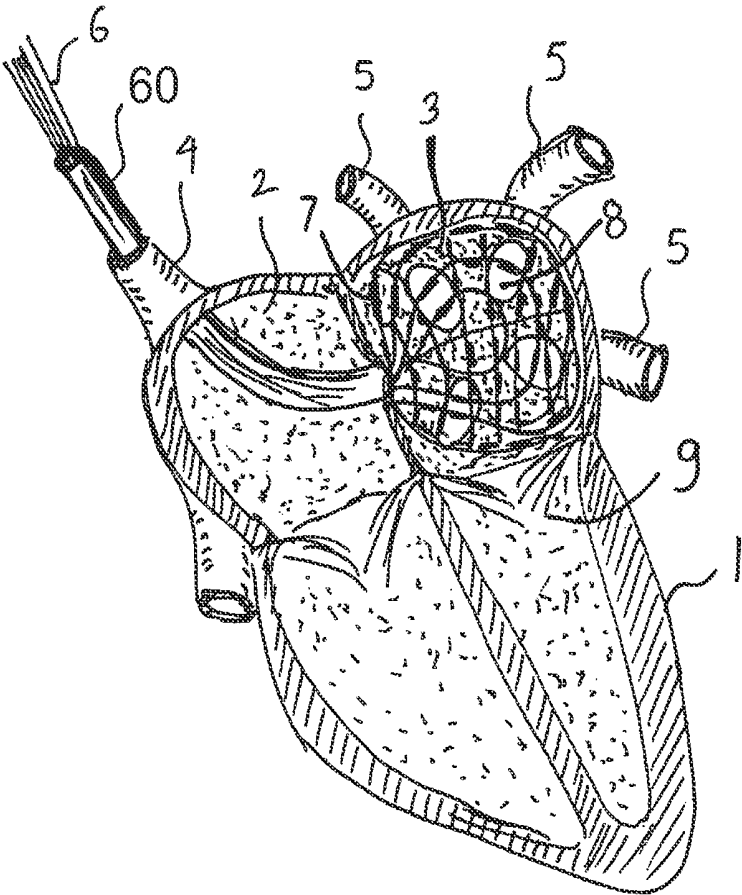


Fig 1

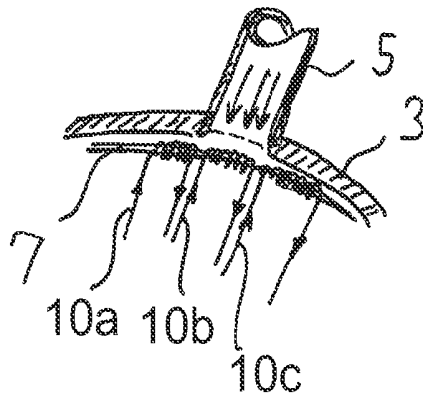


Fig 2

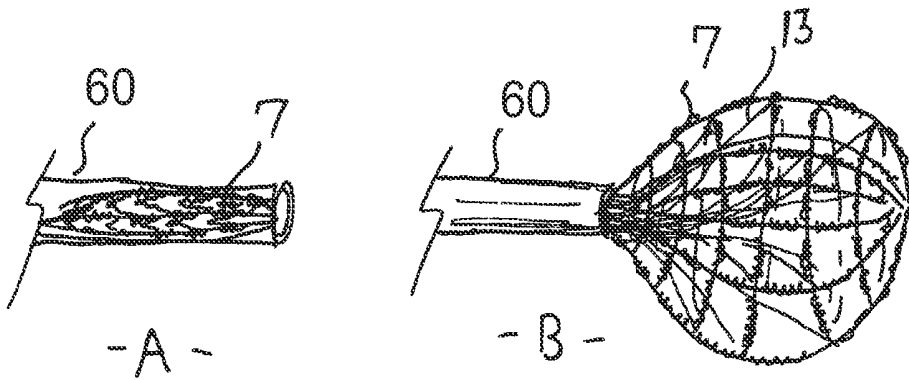


Fig 3

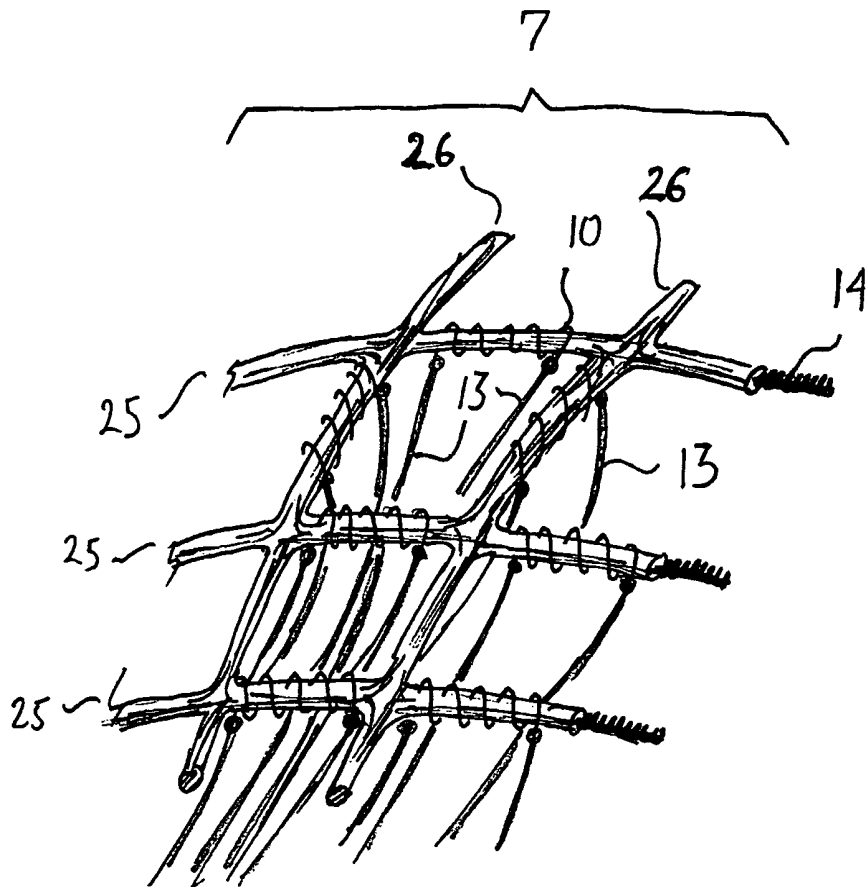


Fig 4

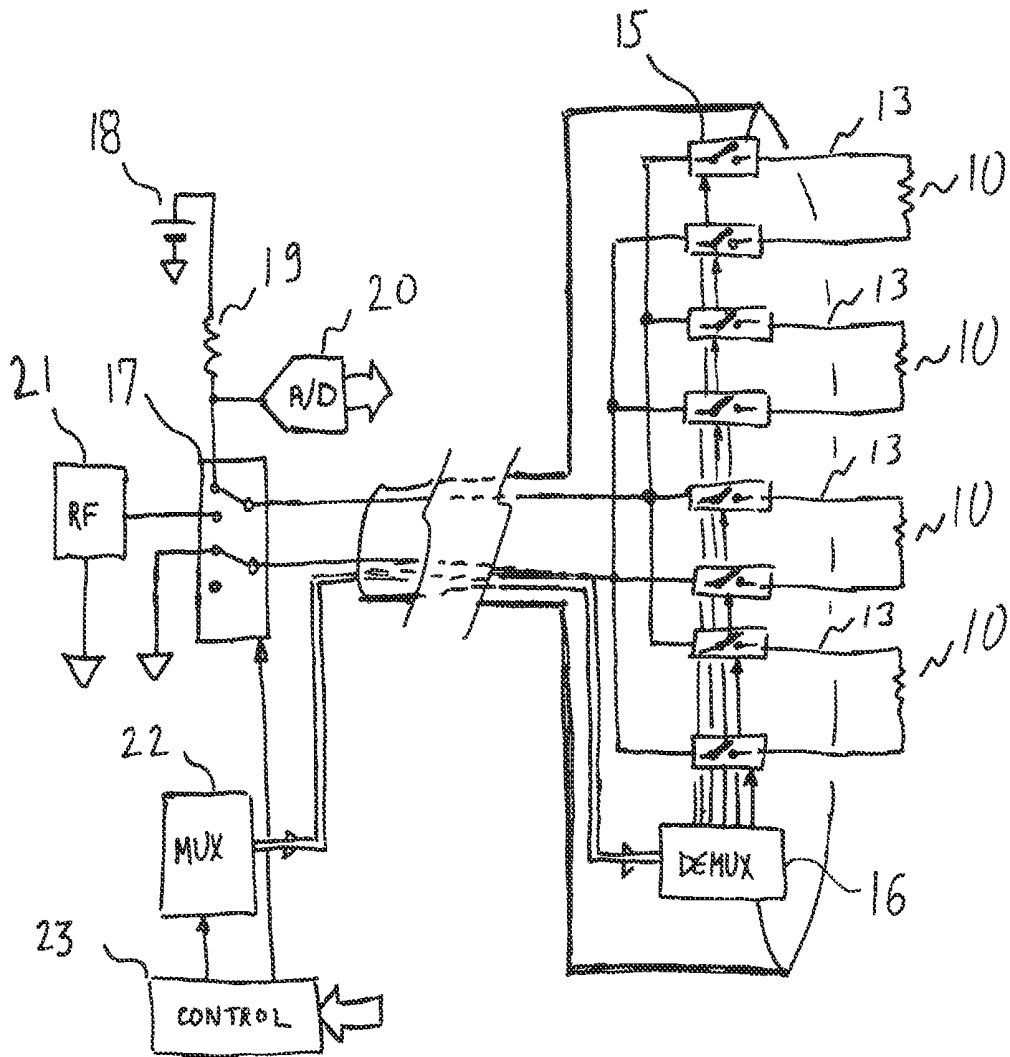


Fig 5

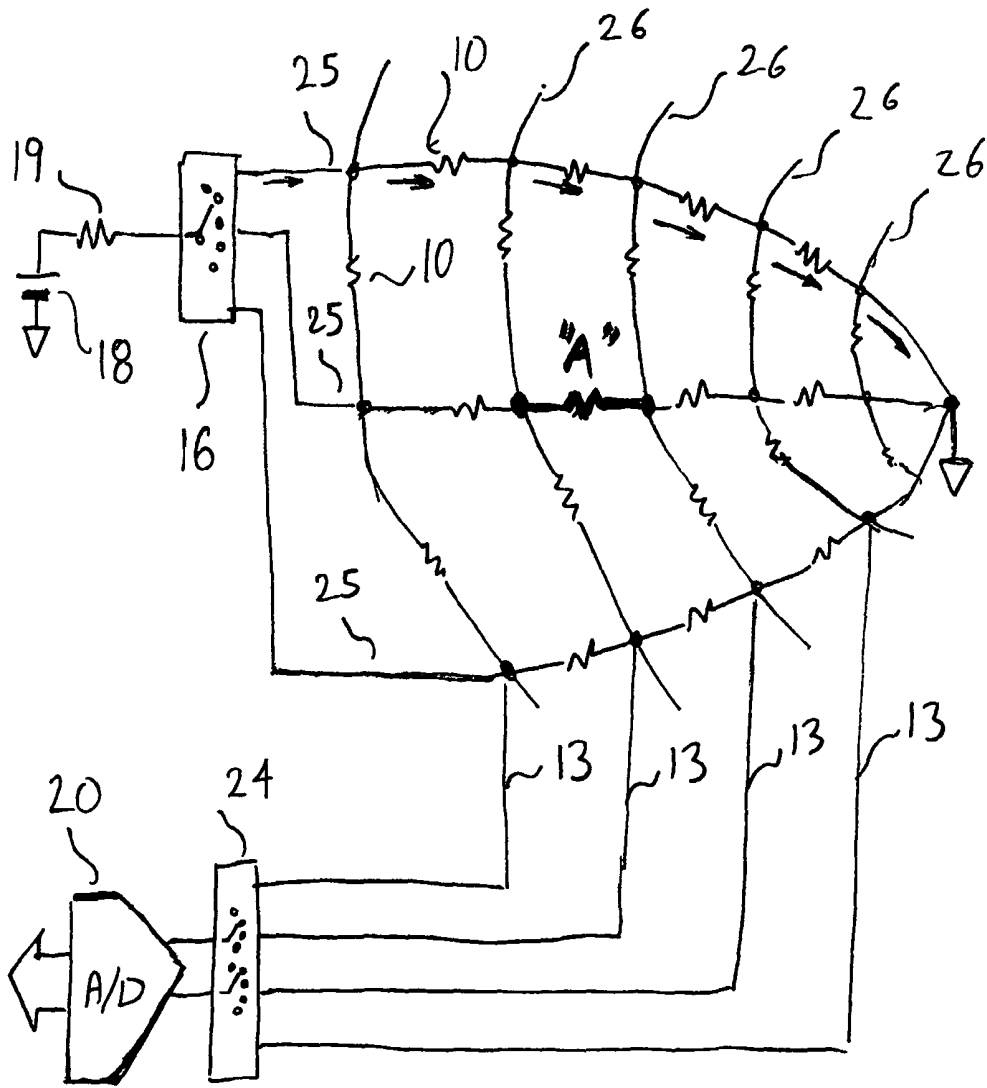


Fig 6

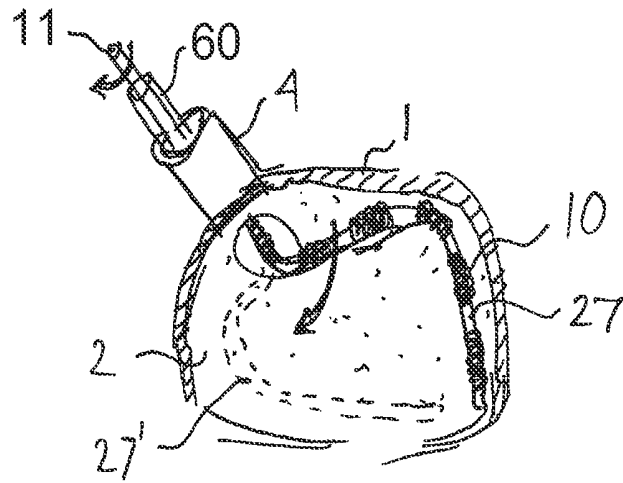


Fig 9

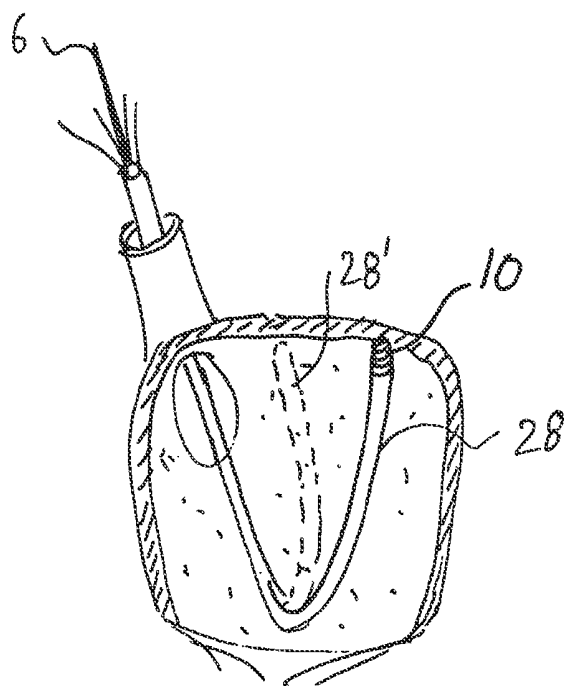


Fig 10

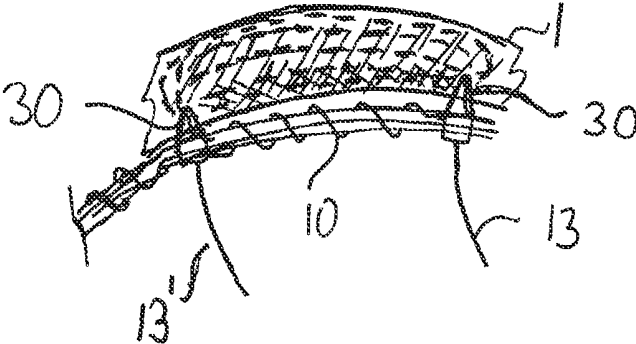


Fig 11

APPARATUS AND METHOD FOR INTRA-CARDIAC MAPPING AND ABLATION

BACKGROUND

1. Technical Field

This disclosure generally relates to minimally invasive heart surgery, also known as percutaneous cardiac surgery and particularly relates to percutaneous mapping and ablation.

2. Description of the Related Art

Atrial fibrillation is a well known disorder in which spurious electrical signals cause an irregular heart beat. The disorder has a well known cure known as the Maze procedure, in which a border is ablated around the sources of the spurious signals, typically in the left atrium but sometimes in the right atrium. The procedure is very commonly performed under direct vision, but difficult to perform percutaneously via a catheter because of associated risk. Any error in navigation inside the heart can cause fatal damage. The key to a percutaneous procedure is mapping of the inside of the right and left atrium. Access to the right atrium is simple via the superior vena cava; the left atrium can be reached by: i) perforating the transatrial septum; ii) via the aorta and the left ventricle; or iii) via the pulmonary veins.

Prior approaches to map the inside of the atrium relied on electrical activity picked up from the atrium wall. These approaches require intimate electrical contact, which is not always possible because of scar tissue and deposits. These approaches may fail to accurately map the edges of the openings where the veins enter the atrium; information that is useful for correct placement of the ablation pattern. Other mapping methods, such as using an array of ultrasonic transducers, are not practical since such arrays typically will not fit through a catheter of a reasonable size (8-10 mm diameter). A superior mapping apparatus and method that enables safe execution of the Maze and other intra-cardiac procedures is desirable.

A good survey article on the subject is: "Ablation of Atrial Fibrillation: Energy Sources and Navigation Tools: A survey" by Ruediger Becker and Wolfgang Schoels (*J. of Electrophysiology*, Vol 37, 2004, pp 55-61). The article includes an extensive bibliography.

BRIEF SUMMARY

Embodiments of an intra-cardiac mapping system are based on locating openings or ports and valves through which blood flows in or out the heart chambers. For many procedures, such as ablation to cure atrial fibrillation, accurately locating the pulmonary veins and the mitral valve allows performance of a Maze procedure. The openings, ports and valves may be located based on the convective cooling effect of the blood flow. The mapping can be performed by a catheter-deployed expandable net or a scanning catheter. The same net or catheter can also perform the ablation procedure.

In one embodiment, a method for intra-cardiac mapping comprises: introducing a plurality of flow sensors into an intra-cardiac cavity; locating points in a wall forming said cavity based on sensing blood flow; and mapping said walls of said cavity based on said points. The method for intra-cardiac mapping may include said blood flow being sensed by its convective cooling effect on a heated sensor. The method for intra-cardiac mapping may include said sensing being done by a steerable linear array. The method for intra-cardiac mapping may include said mapping being used for treating atrial fibrillation by RF ablation. The method for intra-cardiac map-

ping may include being used for treating atrial fibrillation by microwave ablation. The method for intra-cardiac mapping may include said mapping being used for treating atrial fibrillation by cryogenic ablation. The method for intra-cardiac mapping may include said mapping being used for treating atrial fibrillation by laser ablation. The method for intra-cardiac mapping may include said blood flow being sensed by the resistance change of a heated resistive wire.

In another embodiment, a method for intra-cardiac mapping comprises: introducing an expandable sensing mesh into said cavity via a catheter; using said mesh to locate openings in walls forming said cavity based on the convective heat transfer of blood flowing through said holes; and mapping inside of said cavity based on location of said openings. The method for intra-cardiac mapping may include said blood flow being sensed by its convective cooling effect on a heated sensor. The method for intra-cardiac mapping may include said sensing being done by a steerable linear array. The method for intra-cardiac mapping may include said mapping being used for treating atrial fibrillation by RF ablation. The method for intra-cardiac mapping may include said mapping being used for treating atrial fibrillation by microwave ablation. The method for intra-cardiac mapping may include said mapping being used for treating atrial fibrillation by cryogenic ablation. The method for intra-cardiac mapping may include said mapping being used for treating atrial fibrillation by laser ablation. The method for intra-cardiac mapping may include said blood flow being sensed by the resistance change of a heated resistive wire. The method for intra-cardiac mapping may include said mesh comprising a small coils of nickel wire wound on a mesh of a flexible insulator. The method for intra-cardiac mapping may include an electronic switch used to minimize the number of electrical wires passing through said catheter.

In yet another embodiment, a method for treating atrial fibrillation comprises: introducing at least one flow sensors into an intra-cardiac cavity; locating points in a wall forming said cavity based on sensing blood flow; mapping walls of said cavity based on said points; ablating a pattern into walls of said cavity based on said mapping. The method for treating atrial fibrillation may include said blood flow being sensed by its convective cooling effect on a heated sensor. The method for treating atrial fibrillation may include said sensing being done by a steerable linear array. The method for treating atrial fibrillation may include said mapping being used for treating atrial fibrillation by RF ablation. The method for treating atrial fibrillation may include said mapping being used for treating atrial fibrillation by microwave ablation. The method for treating atrial fibrillation may include said mapping being used for treating atrial fibrillation by cryogenic ablation. The method for treating atrial fibrillation may include said mapping being used for treating atrial fibrillation by laser ablation. The method for treating atrial fibrillation may include said blood flow being sensed by the resistance change of a heated resistive wire. The method for treating atrial fibrillation may include said flow sensors also acting as electrodes for said ablation. The method for treating atrial fibrillation may include said flow sensor being based on temperature sensing and a same sensor being used to monitor temperature during said ablation. The method for treating atrial fibrillation may include said ablation being unipolar. The method for treating atrial fibrillation may include said ablation being bipolar. The method for treating atrial fibrillation may include said ablated pattern being a Maze procedure.

BRIEF DESCRIPTION OF THE DRAWINGS

In the drawings, identical reference numbers identify similar elements or acts. The sizes and relative positions of ele-

ments in the drawings are not necessarily drawn to scale. For example, the shapes of various elements and angles are not drawn to scale, and some of these elements are arbitrarily enlarged and positioned to improve drawing legibility. Further, the particular shapes of the elements as drawn, are not intended to convey any information regarding the actual shape of the particular elements, and have been solely selected for ease of recognition in the drawings.

FIG. 1 is a cross sectional view of the heart showing the mapping mesh deployed in the left atrium.

FIG. 2 is a cross sectional view of the sensing device.

FIGS. 3A and 3B are isometric views of the mesh in both folded and expanded positions.

FIG. 4 is an isometric enlarged view of a portion of the mesh.

FIG. 5 is an electrical schematic of a mapping and ablation system.

FIG. 6 is an electrical schematic of a simplified mapping system.

FIG. 7 is a schematic view of the display console of the system.

FIGS. 8A and 8B are graphical views of a mapping that illustrate an interpolation principle.

FIG. 9 is a cross sectional view of an alternate embodiment, using mechanical or manual scanning in one axis.

FIG. 10 is a cross sectional view of an alternate embodiment, using mechanical scanning in two dimensions.

FIG. 11 shows the use of the invention for bipolar ablation.

DETAILED DESCRIPTION

FIG. 1 shows a sensing and ablation mesh 7 inserted into a left atrium 3 of a heart 1 according to one illustrated embodiment.

By way of example, the mesh 7 may be delivered via a catheter 60, inserted via a superior vena cava 4 and penetrating a transatrial septum from a right atrium 2 of the heart 1. The mesh 7 is communicatively coupled to the rest of the system, for example, by electrical wires 6.

Before any ablation takes place, the inside of the left atrium 3 is mapped in order to locate the openings or ports 8 leading to the pulmonary veins 5, as well as the mitral valve 9. A typical Maze procedure ablates a "fence" around openings or ports 8 to stop propagation of spurious electrical signals which cause the heart 1 to contract at the wrong times.

The mapping may locate some or all the openings or parts 8 through which blood flows in and out of the left atrium 3, as the Maze procedure is mainly concerned with the location of these openings or ports 8. By the way of example, in the left atrium 3, the four openings or ports 8 leading to the pulmonary veins 5 as well as the mitral valve 9 may be located. The location 5 may be based on the fact that the convective cooling effect of the blood is significant, and a slightly heated mesh 7 pressed against the walls of the left and/or right atrium 3, 2 will be cooler at the areas which are spanning the openings or ports 8 carrying blood.

FIG. 2 shows the ablation mesh 7 covered by miniature heating and/or temperature sensing elements 10a-10c (collectively 10, only three illustrated in the figure). Each one of these elements 10a-10c comprises of a few turns of a resistive wire, for example, nickel wire, wound on an electrically insulated mesh. A low current is passed through each element 10, raising a temperature of the element 10 by about 1 degree C. above normal blood temperature. A first element 10b, which lies across an opening or port 8 of one of the

pulmonary veins 5, will be cooled by blood flow. The other elements are against a wall 3 and hence do not lie across any of the openings or ports 8.

By identifying the relatively cooler elements 10a, 10c on the mesh 7, the location of the openings or ports 8 may be found.

This method does not require intimate contact with the wall 3, as the cooling effect is significant even a few millimeters away from the opening.

The same elements 10 can be used as ablation electrodes during an ablation stage. It was found that the power required to raise the temperature of the mesh 7 by a small but easily detectable amount is very small, on the order of 10-50 mW per element 10. If the elements 10 are made of a material that has a significant change in resistance with temperature, the temperature drop can be sensed by measuring a voltage across the element 10 when driven by a constant current. A good choice for element material is nickel wire, which is inert, highly resistive and has a significant temperature coefficient of resistance (about 0.6% per deg C). Since the resistance of the elements 10 is low (typically 0.1-1 ohm), the electrical noise is very low and temperature changes as low as 0.1 deg can be easily detected. For even higher detection sensitivity, the voltage waveform can be sampled in synchronization with the heart rate or the average voltage removed and only the change amplified. Such methods are referred to as "AC coupling". A further refinement to reduce the electrical noise is to pass the signal through a digital band pass filter having a center frequency tracking the heart rate. To avoid any potential tissue damage, the temperature of the elements 10 of the mesh 7 is only slightly above the blood temperature, typically 0.1-3 degrees C. above blood temperature.

FIG. 3A shows the mesh 7 in a compressed configuration "A" and FIG. 3B shows the mesh 7 in an expanded configuration "B". Since the mesh 7 has to fit into a catheter 60, the mesh 7 should be very flexible. Besides elements 10 discussed earlier, there is also a large number of leads 13 coming out of the mesh 7. Leads 13 can be loose, as shown in FIG. 3B, or may be bonded to the mesh 7. To avoid feeding a large number of wires all the way to an operating console, an electronic selector switch may be employed, which may, for example, be mounted in the catheter 60. This reduces the number of electrical wires from over 100 to about 10. The mesh 7 can be self-expanding (elastic) or balloon-expandable. Self expanding allows normal blood flow during the procedure. For balloon expandable devices, the expansion balloon should be removed before the mapping, to avoid blocking the flow of blood.

FIG. 4 shows the mesh 7 in more detail. Insulated longitudinal (i.e., parallel to catheter) wires 25 are crossed by cross wires 26. Each section of the mesh 7 is covered by a few turns of thin (0.05-0.2 mm) nickel wire 10 having leads 13. The leads 13 can be regular thin copper wire. The longitudinal wires 25 can be stiffer than the cross wires 26, therefore can be made self-expanding by incorporating a core 14 made of coiled flexible metal wire such as Nitinol. A metallic core may interfere with the ablation process at higher frequencies and can be replaced by simply making the longitudinal wires 25 of a polymeric material thicker than the cross wires 26. The cross wires 26, which may form rings around wires 25, should be very flexible to compress into the catheter 60. The cross wires 26 could incorporate a very thin wire or coiled up wire. Use of a flexible mesh 7 not only allows percutaneous delivery, but also permits the mesh 7 to follow the atrial volume change each heartbeat. The mesh 7 should stay in contact with or close to the atrial wall during the cardiac cycle, otherwise the measurement and the ablation may only be performed

during parts of the cardiac cycle. The diameter of the longitudinal wires **25** and cross wires **26** are typically 0.2-1 mm. The mesh **7** may include about 10-20 longitudinal wires **25** and about 10-20 cross wires **26**. The insulation can be any polymeric material such as thin enamel or polymer coating. Practically any polymer can be used, as the maximum temperature it will be subject to, including during the ablation phase, is around 100 degrees C.

FIG. **5** shows an electrical system, according to one illustrated embodiment. The elements **10** may be resistive heaters wound on the mesh **7**. Each of the elements **10** is connected by electronic element switches **15** (typically FET or MOS-FET type) to a single pair of wires leading out of the body to a mode selection switch **17**. Element switches **15** are selected by de-multiplexer or selector **16**. The de-multiplexer or selector **16** is controlled by a small number of wires or even a single wire if data is sent in serial form, by a multiplexer **22**. Element switches **15** and de-multiplexer or selector **16** may be built into the catheter **60**, which may, for example, be located near the point of deployment of the mesh **7**. The element switches **15** have to carry significant power during the ablation phase.

The mode selection **17** selects between a mapping mode (position shown in the drawing) and an ablation mode (second position of switch). In the mapping mode, a current is created by a voltage source **18** and resistor **19** (e.g., forming a constant current source) and routed into a selected element **10** by the element switches **15**. For each measurement, the two element switches **15** that are connected to the scanned element **10** are in an enabled state (ON), the rest of the element switches being in a disabled state (OFF). The voltage drop across an element **10** is measured by an analog to digital (ND) converter **20** and fed to a control computer **23**. For greater accuracy, four terminal sensing can be employed. In a preferred embodiment, the detection is AC coupled, therefore the DC voltage drops along the wires are of no consequence, and no four-terminal sensing is needed. For AC coupling, the control computer **23** includes a 0.5 Hz low pass filter implemented in software. The slight disadvantage of the AC coupled method approach is speed, as the low signal frequency (e.g., about 1 Hz), requires a few seconds per measurement. Other temperature sensors and/or approaches, such as thermistors or thermocouples, can be used in conjunction with the elements **10**. Mapping is achieved by turning on all of the elements **10** sequentially and measuring the temperature of each. A map is formed in the control computer **23** and the lower temperature spots on the mesh correspond to the openings or ports **8** leading to the veins or valves.

When the mode selection switch **17** is in the ablation mode, a generator **21** (e.g., Radio Frequency (RF)) is connected (e.g., sequentially) to selected elements **10** by the control computer **23** addressing the multiplexer **22** which controls the element switches **15** via the de-multiplexer selector **16**. The complete operation, including scanning and ablation, can be completed in less than 5 minutes. The configuration illustrated in FIG. **5** implies unipolar ablation; however bipolar ablation can be used as well and is discussed below. Clearly other sources of ablation can be used besides RF. Frequencies from DC to microwaves can be used, as well as delivery of laser power via optical fibers or cryogenics via thin tubes. For laser ablation element switches **15** are optical switches, while for cryogenic ablation the element switches **15** are valves.

During ablation it is desirable to monitor the temperature of the tissue. The ideal temperature range for the tissue during RF ablation is 60-80 degrees C. Since the current system includes temperature monitoring as part of the mapping, the progress of ablation can be monitored by temporarily switching the mode selection switch **17** to the mapping position

several times during the ablation procedure. The measured temperatures can be displayed on a display **32** (FIG. **7**). RF ablation is typically performed at frequencies of 100 KHz-1 MHz and power levels which depend on the size of the elements **10**, but can be as high as 100 W. Various RF ablation techniques and equipment are well known in the art.

FIG. **6** shows an embodiment in which the mapping system is separate from the ablation system. In this system, the mesh **7** has very few connecting wires. As illustrated, each longitudinal wire **25** has a single output wire and each cross wire **26** has a single output wire **13**. For a 10x10 mesh **7** with 100 nodes, only twenty-one wires are needed (ten plus ten plus ground wire), instead of two hundred wires. This allows all wires to be brought directly out of the catheter **60**. This also allows placement of selector switches **16** and **24** together with the control system. For example, if the element marked as "A" is selected; a current is selected to run through the longitudinal wire **25** which includes element A. The voltage drop is sensed by the two circumferential wires **13** that connect directly to A. Since no current flows in the other elements at the time of measurement, the voltage drop is only caused by element A. It is sensed by ND converter **20** via double pole selector **24**.

After a map is established, it is displayed on a display screen **32** as shown in FIG. **7**. The surgeon can select which elements **10** will cause tissue ablation in the atrium. The pattern formed is along the line of the standard Maze procedure. The location of the pulmonary veins **5** and the mitral valve **9** is inferred from the temperature data and drawn on the display screen.

FIGS. **8A** and **8B** demonstrate the principle of accurate location of the veins and valves even if the grid is relatively coarse. The exact location can be interpolated based on the fact that when only part of the element **10** is exposed to the flowing blood, the resistance change will be proportional to the part that is exposed to the blood flow. By the way of example, if the temperature of the mesh **7** is 1 degree C. above blood temperature and equals the blood temperatures under normal blood flow (this was experimentally verified), the temperatures of a group of elements **10** will be as shown in FIG. **8A** when aligned with the opening or port **8** of vein **5**. The number near each element **10** is the temperature drop. When moved, some of the elements **10** will only be partially positioned in the flow path under vein **5**, as shown by FIG. **8B**. The temperatures of those elements **10** will be between 0 and 1 degree above blood temperature. The exact temperature drop between 0 to 1 corresponds with the exact shift. This allows accurate determination of the location and size of each opening or port **8**, data used by the control computer **23** to draw the map shown in FIG. **7**. A grid spacing of 10 mm allows about 1 mm accuracy.

An alternative to a full mesh is a partial mesh, or even a single sensor, that is mechanically scanned across the area to be mapped. FIG. **9** shows a linear sensor array **27** pushed into the atrium **2** via vein **4** by the catheter **60**. The linear sensor array **27** has a linear array of elements **10** similar to those used in the full mesh **7**. After a linear mapping is performed the linear sensor array **27** is rotated (as shown by broken line **27'**) a small amount (10-20 degrees) by stem **11** (similar to electrical wires **6**) and a new scan is performed. The same procedures previously described may be used for ablation.

FIG. **10** shows the use of a single steerable catheter **28** as a mapping and ablation tool. Steerable catheters are controlled remotely by mechanical, magnetic, hydraulic or other means. A steerable catheter **28** can be used to scan the inside of the atrium **3** by bending, as shown in broken line **28'**. The location is monitored by external or internal sensors. A position of a tip

of the steerable catheter **28** can also be monitored by fluoroscopy. The catheter tip contains a heating and/or ablation element **10**. Steerable catheters **28** may advantageously carry a wide range of ablation systems, since only one connection and one point is needed.

A full mesh trades a higher complexity for better speed and accuracy when compared to linear arrays or single point scanning.

The previous example were of unipolar ablation, with the ablation current returning to ground via the patient's body. The disclosed system can also be used for bipolar ablation as shown in FIG. **11**. In unipolar ablation the same voltage is connected to both leads **13** and **13'** of an element **10**. In bipolar ablation the voltage is connected to lead **13** while the other end, **13'**, is grounded. It is important that the element **10** will be of sufficient resistance to cause most of the ablation current to flow through heart tissue **1**. Electrodes **30** make contact with tissue **1** while the wire used in the element **10** is covered by an insulator. The advantage of bipolar ablation is better control of ablation depth. Typical ablation temperatures are 60-80 degrees C. At a higher temperature the tissue **1** becomes less conductive, forcing the ablation current to seek a new path. This promotes full ablation of the tissue **1**. The element **10** can also be designed to assist ablation by creating heat when ablation voltage is applied across it.

One possible advantage of at least some of the presently disclosed embodiments over electrical potential mapping methods is that the presently disclosed embodiments do not require perfect contact between the mesh **7** and the tissue **1**. The presently disclosed embodiments may also advantageously be less sensitive to the surface properties of the tissue, such as scar tissue or plaque.

If the mesh is separated from the tissue by a thin layer of blood, both the temperature sensing and the ablation functions of the presently disclosed embodiments will still function properly.

The word "element" in this disclosure has to be interpreted in a broad sense as any element capable of sensing blood flow. Clearly the elements do not need to be heaters, as cooling elements will work equally well. If a material is injected into the blood flow, any sensor capable of detecting this material can be used to detect blood flow. By the way of example, if the blood is cooled or warmed slightly before returning to the

heart only temperatures sensors are needed. Since temperature differences as low as 0.1 degree C. can be detected reliably, it is fairly simple to heat or cool the blood slightly before it returns to heart (even by a simple external pad).

The above description of illustrated embodiments, including what is described in the Abstract, is not intended to be exhaustive or to limit the embodiments to the precise forms disclosed. Although specific embodiments of and examples are described herein for illustrative purposes, various equivalent modifications can be made without departing from the spirit and scope of the disclosure, as will be recognized by those skilled in the relevant art.

The various embodiments described above can be combined to provide further embodiments. Aspects of the embodiments can be modified, if necessary, to employ systems, circuits and concepts of the various patents, applications and publications to provide yet further embodiments.

These and other changes can be made to the embodiments in light of the above-detailed description. In general, in the following claims, the terms used should not be construed to limit the claims to the specific embodiments disclosed in the specification and the claims, but should be construed to include all possible embodiments along with the full scope of equivalents to which such claims are entitled. Accordingly, the claims are not limited by the disclosure.

What is claimed is:

1. A medical system comprising:

an array of elements configured to be introduced into an intra-cardiac cavity; and

a control computer coupled to the array of elements and configured at least to:

locate points on a wall of the intra-cardiac cavity based on sensing blood flow with the elements;

map the wall of the intra-cardiac cavity based on the located points; and

ablate a pattern into the wall of the intra-cardiac cavity with at least some of the elements while updating the map,

wherein at least one of the elements is configured at least to sense temperature, and the control computer is further configured at least to monitor, with at least one of the at least one of the elements, temperature during each of the locating and the ablating.

* * * * *

专利名称(译)	用于心脏内映射和消融的装置和方法		
公开(公告)号	US8920411	公开(公告)日	2014-12-30
申请号	US11/475950	申请日	2006-06-28
[标]申请(专利权)人(译)	吉尔巴特DANIEL LICHTENSTEIN SAMUEL VICTOR		
申请(专利权)人(译)	吉尔巴特DANIEL LICHTENSTEIN SAMUEL VICTOR		
当前申请(专利权)人(译)	KARDIUM INC.		
[标]发明人	GELBART DANIEL LICHTENSTEIN SAMUEL VICTOR		
发明人	GELBART, DANIEL LICHTENSTEIN, SAMUEL VICTOR		
IPC分类号	A61B5/029 A61B18/14 A61B18/08 A61B5/00 A61B18/00 A61B18/02 A61B18/10 A61B18/20 A61B18/18 A61B5/028 A61B18/12		
CPC分类号	A61B2018/0022 A61B2018/1407 A61B18/1492 A61B5/6853 A61B2018/0212 A61B18/10 A61B5/029 A61B18/20 A61B2018/00714 A61B2562/046 A61B18/18 A61B2018/00577 A61B2018/00642 A61B2018/0237 A61B2018/00791 A61B5/028 A61B19/50 A61B19/56 A61B2018/00351 A61B2019/564 A61B34/10 A61B34/25 A61B2034/254		
其他公开文献	US20080004534A1		
外部链接	Espacenet USPTO		

摘要(译)

心内标测系统基于定位血液流入或流出心腔的端口。对于许多手术，例如消融治疗心房颤动，准确定位肺静脉和二尖瓣允许执行迷宫手术。端口和阀门的位置基于使用血流的对流冷却效果。可以通过导管部署的可扩展网或扫描导管来执行映射。相同的网或导管也可以执行消融手术。

