



US 20140046219A1

(19) **United States**

(12) **Patent Application Publication**

Sauter et al.

(10) **Pub. No.: US 2014/0046219 A1**

(43) **Pub. Date: Feb. 13, 2014**

(54) **ANNULOPLASTY SIZERS FOR MINIMALLY INVASIVE PROCEDURES**

(71) Applicant: , Arvada, CO (US)

(72) Inventors: **Joseph A. Sauter**, Arvada, CO (US); **W. Clark Hargrove, III**, Haverford, PA (US)

(73) Assignee: **Sorin Group USA, Inc.**, Arvada, CO (US)

(21) Appl. No.: **14/055,661**

(22) Filed: **Oct. 16, 2013**

Related U.S. Application Data

(62) Division of application No. 12/732,656, filed on Mar. 26, 2010, now abandoned.

(60) Provisional application No. 61/163,732, filed on Mar. 26, 2009.

Publication Classification

(51) **Int. Cl.**

A61B 5/107 (2006.01)
A61B 17/00 (2006.01)
A61B 6/12 (2006.01)
A61B 5/00 (2006.01)

(52) **U.S. Cl.**


CPC **A61B 5/1076** (2013.01); **A61B 5/4836** (2013.01); **A61B 17/00234** (2013.01); **A61B 6/12** (2013.01)

USPC **600/587**

(57)

ABSTRACT

A sizing plate for sizing a native valve annulus in a patient's heart for either valve replacement or repair during a minimally invasive surgical procedure is shown and described. The sizing plate is generally shaped such that it corresponds to the shape of the native valve annulus. Additionally, a thickness of the sizing plate is such that it can be inserted through a space between the ribs of the patient during the procedure. The sizing plate includes two keyways extending though the plate separated by a bridge. The keyways are sized and shaped such that they are adapted to be engaged by a minimally invasive surgical tool such as a laparoscopic grasper. The keyways in conjunction with the bridge facilitate manipulation of the sizing plate by the grasper from an external location.

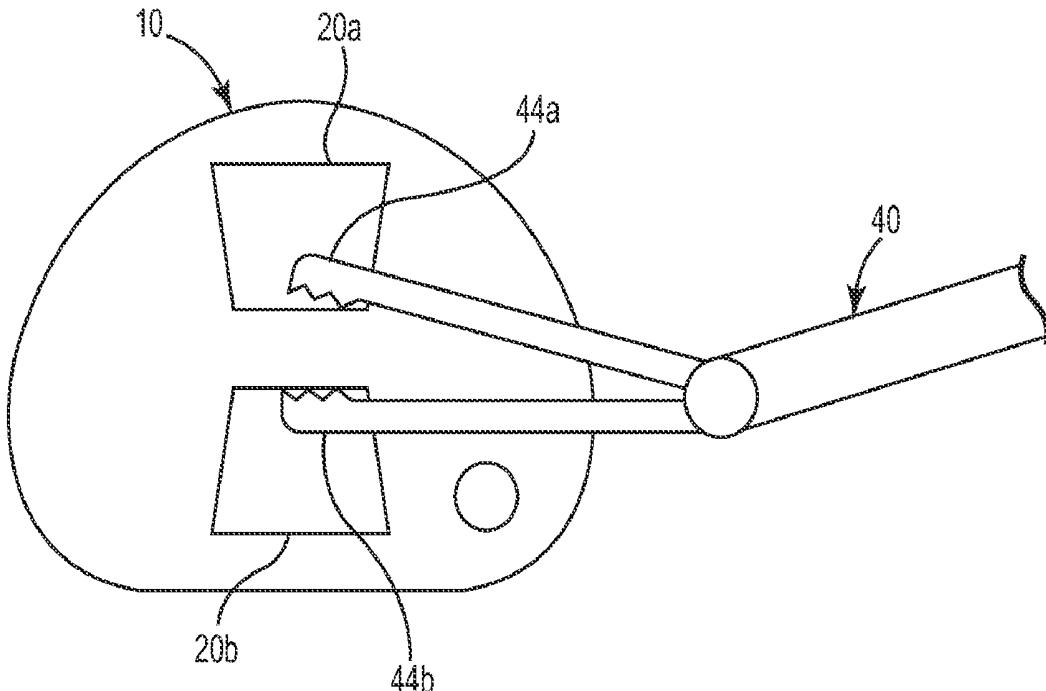

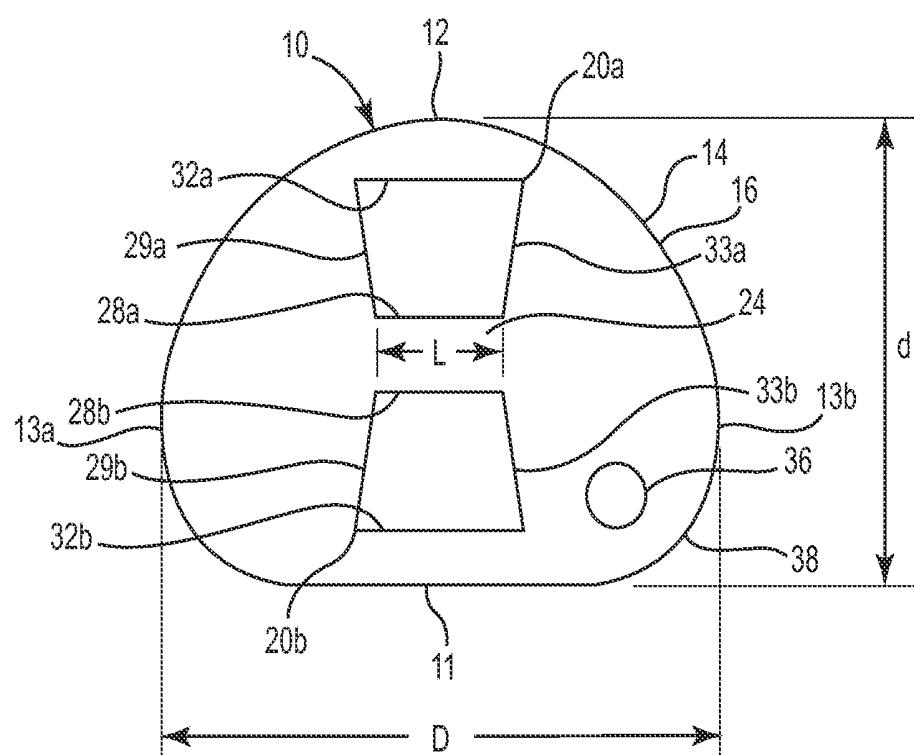


Fig. 1

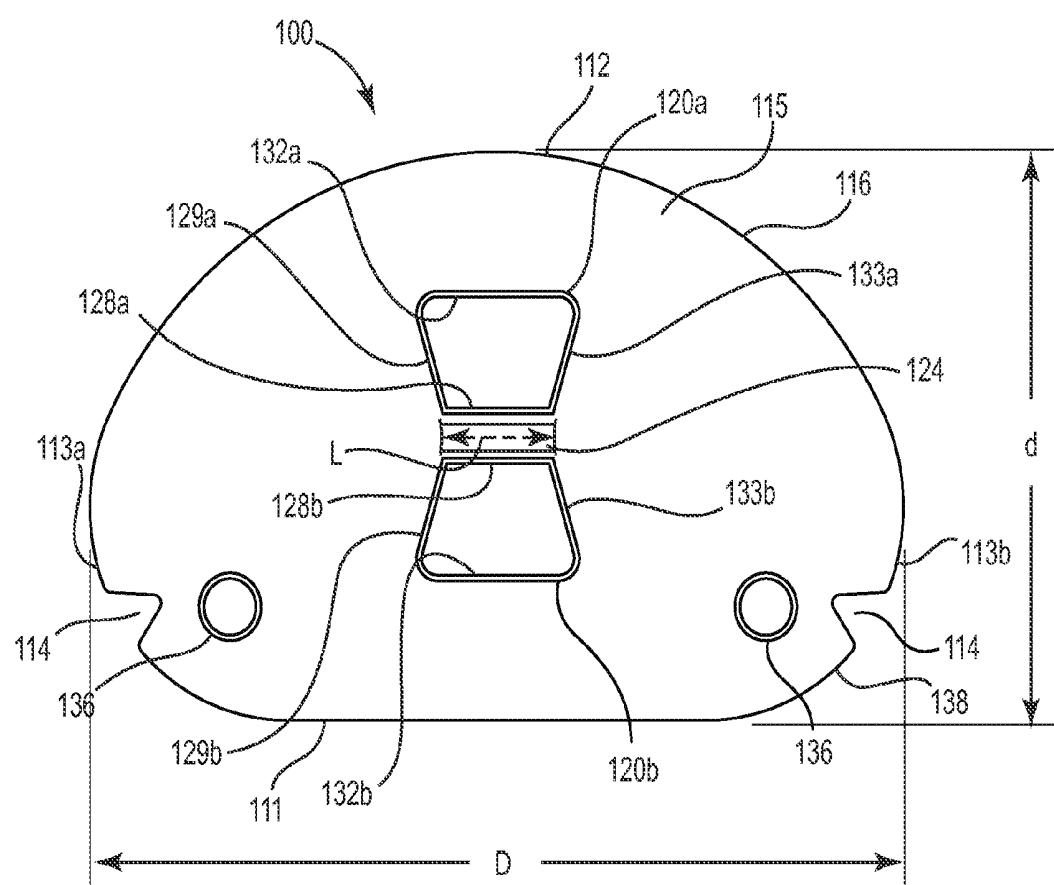


Fig. 2

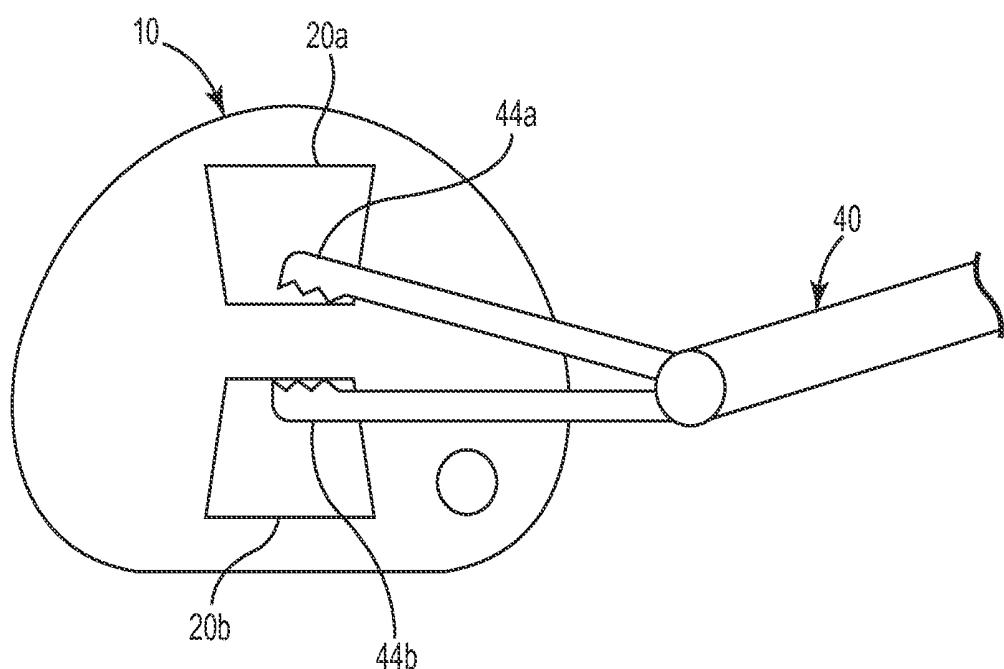


Fig. 3

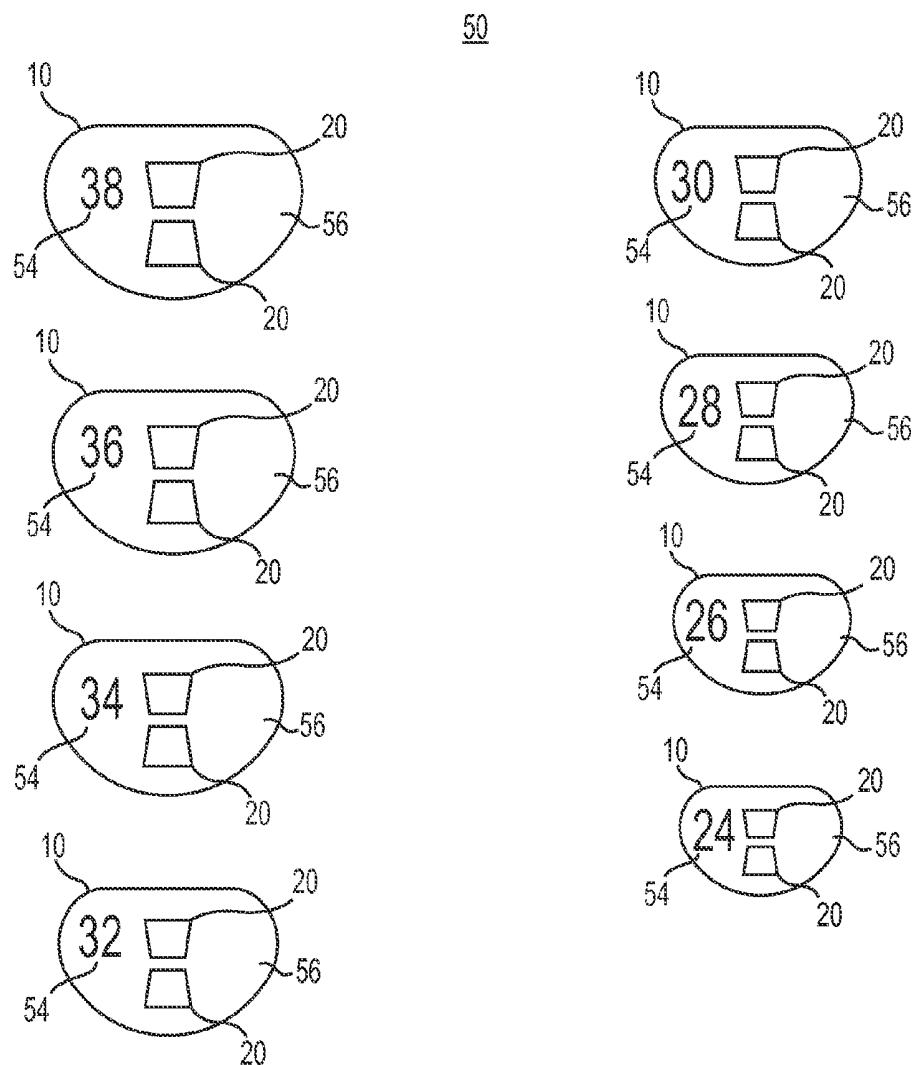


Fig. 4

ANNULOPLASTY SIZERS FOR MINIMALLY INVASIVE PROCEDURES

CROSS-REFERENCE TO RELATED APPLICATION

[0001] This application is a divisional of U.S. application Ser. No. 12/732,656, filed Mar. 26, 2010, which claims the benefit under 35 U.S.C §119 of U.S. Provisional Application No. 61/163,732, filed on Mar. 26, 2009, which are herein incorporated by reference in their entirety for all purposes.

TECHNICAL FIELD

[0002] The present invention relates to devices, kits, and methods for sizing the annulus of an anatomical structure. More particularly, the present invention is related to sizing plates for use in minimally invasive surgical procedures to repair or replace a diseased native valve.

BACKGROUND

[0003] A heart valve can become defective or damaged, such as resulting from congenital malformation, disease, or aging. When the valve becomes defective or damaged, the leaflets may not function properly. One common problem associated with a degenerating heart valve is an enlargement of the valve annulus (e.g., dilation). Other problems that may result in valve dysfunction are chordal elongation and lesions developing on one or more of the leaflets. Adverse clinical symptoms, such as chest pain, cardiac arrhythmias, dyspnea, may manifest in response to valve prolapse or regurgitation. As a result, surgical correction, either by valve repair procedures or by valve replacement, may be required.

[0004] Surgical reconstruction or repair procedures may include plication, chordal shortening, or chordal replacement. Another common repair procedure relates to remodeling of the valve annulus (e.g., annuloplasty), which may be accomplished by implantation of a prosthetic ring to help stabilize the annulus and to correct or help prevent valvular insufficiency which may result from defect or dysfunction of the valve annulus. Properly sizing and implanting the annuloplasty ring may substantially restore the valve annulus restored to its normal, undilated, circumference. In other situations, the valve can be replaced. During valve replacement procedures, the valve annulus is sized so as to select an appropriately sized replacement valve.

SUMMARY

[0005] The present invention relates to devices, kits, and methods for sizing the annulus of an anatomical structure. More particularly, the present invention is related to sizing plates for use in minimally invasive surgical procedures to repair or replace a diseased native valve.

[0006] Example 1 is a sizing plate for sizing a native valve annulus in a patient's during a minimally invasive valve replacement repair or procedure. The sizing plate includes an upper surface and a lower surface defining a thickness of the sizing plate between the upper and lower surfaces; first and second keyways extending through the sizing plate from the upper planar surface to the lower planar surface of the sizing plate; and a bridge member between the first and second keyways configured to be engaged by a laparoscopic grasping tool.

[0007] Example 2 is a sizing plate according to Example 1, wherein the sizing plate is generally D-shaped.

[0008] Example 3 is a sizing plate according to any one of Examples 1-2, wherein the sizing plate has a shape generally corresponding to a shape of the anterior leaflet of the native mitral valve.

[0009] Example 4 is a sizing plate according to any one of Examples 1-3, wherein the bridge member comprises a bar coupled to the sizing plate.

[0010] Example 5 is a sizing plate according to any one of Examples 1-4, wherein at least a portion of the sizing plate is radiopaque.

[0011] Example 6 is a sizing plate according to any one of Examples 1-5, wherein the first and second keyways have a trapezoidal shape.

[0012] Example 7 is a sizing plate according to any one of Examples 1-6, wherein the sizing plate is generally D-shaped having a major dimension and a minor dimension, and wherein the bridge is oriented substantially parallel to the major dimension.

[0013] Example 8 is a sizing plate according to any one of Examples 1-7, further comprising an aperture extending through the upper and lower surfaces disposed near a lower edge of the sizing plate.

[0014] Example 9 is a sizing plate according to any one of Examples 1-8, wherein the thickness of the sizing plate defined between the upper planar surface and the lower planar surface is such that the sizing plate is adapted to be inserted through a space between a patient's ribs when the sizing plate is oriented on an edge.

[0015] Example 10 is a kit for sizing a native valve annulus in a patient's heart during a minimally invasive valve replacement or repair procedure. The kit according to Example 10 includes: a plurality of sizing plates of differing size for sizing the native valve annulus, each sizing plate having a shape generally corresponding to a shape of the anterior leaflet of the native mitral valve and having a major dimension and a minor dimension, wherein at least one of the major dimension and the minor dimension varies among the plurality of sizing plates. Each sizing plate further includes: an upper planar surface and a lower planar surface defining a thickness of the sizing plate between the upper and lower planar surfaces; first and second keyways extending through the sizing plate from the upper planar surface to the lower planar surface of the sizing plate; and a bridge between the first and second keyways configured to be engaged by a laparoscopic grasping tool.

[0016] Example 11 is a kit according to Example 10, wherein the bridge of each sizing plate is oriented substantially parallel to the major dimension.

[0017] Example 12 is a kit according to any one of Examples 10-11, further including a grasping tool.

[0018] Example 13 is a kit according to any one of Examples 10-12, wherein each sizing plate is generally D-shaped.

[0019] Example 14 is a kit according to any one of Examples 10-13, wherein the first and second keyways of each sizing plate have a trapezoidal shape.

[0020] Example 15 is a kit according to any one of Examples 10-14, wherein each of the sizing plates further includes at least one aperture disposed near a lower edge of the sizing plate.

[0021] Example 16 is a kit according to any one of Examples 10-15, wherein the thickness of each of the sizing plates is such that the sizing plate is adapted to be inserted through a space between a patient's ribs when the sizing plate is oriented on an edge.

[0022] Example 17 is a method of sizing a native valve annulus during a minimally invasive surgical procedure. The method according to Example 17 includes the steps of:

- [0023] a) creating a surgical access port in an intercostal space in a patient's body;
- [0024] b) exposing a native mitral valve annulus;
- [0025] c) inserting a first sizing plate through the surgical access port, the sizing plate including: an upper surface and a lower surface defining a thickness of the sizing plate; first and second keyways extending through the sizing plate from the upper planar surface to the lower planar surface of the sizing plate; and a bridge member between the first and second keyways configured to be engaged by a laparoscopic grasping tool;
- [0026] d) engaging a the bridge of the sizing plate using a laparoscopic grasping tool inserted through the surgical access port;
- [0027] e) positioning the sizing plate in the valve annulus;
- [0028] f) comparing the major and minor dimensions and the shape of the sizing plate to a major and a minor dimension and shape of an anterior leaflet of the mitral valve; and
- [0029] g) determining the major and minor dimensions and shape of the anterior leaflet of the mitral valve.

[0030] Example 18 is a method according to Example 17, further including the steps of: removing the first sizing plate from the patient's body; inserting a second sizing plate through the surgical access port, the second sizing plate comprising a major dimension and a minor dimension and a shape generally corresponding to the shape of the anterior leaflet of the mitral valve; an upper planar surface and a lower planar surface defining a thickness of the sizing plate; and a first keyway and a second keyway to facilitate engagement of a grasping tool with the sizing plate, the first and second keyways generally centered on the sizing plate and extending through the sizing plate from the upper planar surface to the lower planar surface of the sizing plate; and repeating steps c)-g).

[0031] Example 19 is a method according to any one of Examples 17-18, further including the step of temporarily suspending the sizing plate through the access port.

[0032] Example 20 is a method according to any one of Examples 17-19, further including the step of orienting the first sizing plate on an edge when inserting the first sizing plate through the surgical access port.

BRIEF DESCRIPTION OF THE DRAWINGS

[0033] FIG. 1 is a schematic view of a sizing plate according to an embodiment of the present invention.

[0034] FIG. 2 is a schematic view of a sizing plate according to another embodiment of the present invention.

[0035] FIG. 3 is a schematic view of a minimally invasive surgical tool engaged with the sizing plate as shown in FIG. 1 according to one embodiment of the present invention.

[0036] FIG. 4 is a schematic view of a set of sizing plates according to one embodiment of the present invention.

DETAILED DESCRIPTION

[0037] FIG. 1 is a schematic view of a sizing plate 10 according to various embodiments of the present invention. The sizing plate 10 can be used to determine the size of an annulus of an anatomical structure within a patient's body

during a minimally invasive surgical procedure. In the illustrated embodiments, the sizing plate 10 can be used to determine the size of an anterior leaflet of a patient's native mitral valve during a minimally invasive surgical procedure to repair or replace the native valve. Accordingly, the sizing plate 10 generally has a size and shape corresponding to that of the anterior leaflet of the native mitral valve to be repaired. Upon determination of the appropriately sized sizing plate 10, the clinician can then select a corresponding annuloplasty prosthesis, which is then secured to the valve annulus to reshape the annulus to improve coaptation of the anterior and posterior valve leaflets. In some embodiments, the sizing plate 10 includes a substantially straight lower edge 11, an arcuate upper edge 12, and first and second side edges 13a and 13b extending between the substantially straight lower edge 11 and the arcuate upper edge 12. In the illustrated embodiment of FIG. 1, the sizing plate 10 is configured for use in a mitral valve repair procedure, and therefore has the characteristic "D"-shape of a native mitral valve annulus, with orthogonal major and minor dimensions D and d, respectively. In various other embodiments, the sizing plate 10 has a size and shape generally corresponding to the annulus of another cardiac valve, e.g., the aortic valve.

[0038] The sizing plate 10 is sized such that it can be inserted through a minimally invasive surgical access port formed in a patient's body. According to various embodiments, the sizing plate 10 is generally planar and includes an upper planar surface 14 and a lower planar surface 16. In some embodiments, a thickness of the sizing plate 10 defined between the upper and lower planar surfaces 14 and 16 facilitates insertion of the sizing plate 10 on its side through a narrow surgical access port. For example, in some embodiments, a thickness of the sizing plate 10 is such that it can be inserted on its side through a space between a patient's ribs. In one embodiment, the sizing plate 10 has a thickness of about 0.125 inches (0.317 cm). In other embodiments, the overall outer size and shape of the sizing plate 10 is small enough such that the sizing plate 10 need not be inserted through a minimally invasive surgical access port on its side, but rather can be inserted face-down through the surgical access port.

[0039] As shown in FIG. 1, the sizing plate 10 includes a first keyway 20a and a second keyway 20b extending through the sizing plate 10 from the upper surface 14 to the lower surface 16. The two keyways 20a, 20b are generally centered in the sizing plate 10 and are separated from one another by a bridge 24. In one embodiment, as shown in FIG. 1, the keyways 20a, 20b are formed in the sizing plate 10 as mirror images of one another. The keyways 20a, 20b and the bridge 24 facilitate engagement of a surgical tool with the sizing plate 10, as will be described in further detail below.

[0040] In the illustrated embodiment, the size and shape of the keyways 20a, 20b facilitate engagement of the sizing plate by a minimally invasive surgical tool, e.g., a standard laparoscopic grasper. Additionally, the dimensions of the keyways 20a, 20b are selected so as to limit movement of the surgical tool within the keyways 20a, 20b, once the surgical tool is engaged with the sizing plate 10.

[0041] As further shown, each keyway 20a, 20b has a generally trapezoidal shape. Thus, the shape of the keyway 20a is defined by substantially parallel first and second sides 28a, 32a, and lateral sides 29a, 33a extending between the first and second sides 28a, 32a. Additionally, the keyway 20b has substantially parallel first and second sides 28b, 32b and lateral sides 29b, 33b therebetween. In the illustrated embodiment,

ment, the sides **28a**, **28b**, **32a**, and **32b** of the keyways **20a**, **20b** are oriented substantially parallel to the major dimension D of the sizing plate **10**, and the keyways **20a**, **20b** are generally laterally centered on the sizing plate **10**.

[0042] As shown, the first sides **28a**, **28b** of the keyways **20a**, **20b** are generally narrower than the second sides **32a**, **32b**, respectively, so as to define the illustrated trapezoidal shape of the keyways **20a**, **20b**. Additionally, the bridge **24** separates the first sides **28a**, **32a** of the keyways **20a**, **20b**, and provides a structure which can be gripped by a minimally invasive grasping tool. In one embodiment, the bridge **24** is integrally formed with the sizing plate **10**. In another embodiment, the bridge **24** is a separate member that is coupled to the sizing plate **10** during the fabrication of the sizing plate **10**. As can be seen in FIG. 1, the bridge **24** has a length L corresponding to the length of the first sides **28a**, **32a** of the keyways **20a**, **20b**. As discussed in greater detail below, the dimensions of the keyways **20a**, **20b** facilitate and guide insertion of the working ends of a surgical tool into secure engagement with the sizing plate **10** while the bridge **24** is gripped by the surgical tool.

[0043] According to some embodiments, as shown in FIG. 1, the sizing plate **10** also includes at least one aperture **36** in addition to the keyways **20a**, **20b**. Like the keyways **20a**, **20b**, the aperture **36** extends through the sizing plate from the upper surface **14** to the lower surface **16**. The aperture **36** can be provided at any location on the sizing plate **10**. In one embodiment, the aperture **36** is located at or near a bottom side edge **38** of the sizing plate **10**. In another embodiment, two apertures are provided at or near opposite bottom side edges of the sizing plate **10** (shown in FIG. 2 described below). According to various embodiments, a suture can be threaded through the aperture **36** such that the sizing plate **10** can be lowered and/or suspended through a surgical access port formed in the patient's body.

[0044] FIG. 2 is a schematic view of a sizing plate **100** according to another embodiment of the present invention. As described above, the sizing plate **100** is configured for use in a mitral valve repair procedure, and therefore has the characteristic "D"-shape of an anterior leaflet of a native mitral valve, with orthogonal major and minor dimensions D and d, respectively. In various other embodiments, the sizing plate **100** has a size and shape generally corresponding to the annulus of another cardiac valve, e.g., the aortic valve. According to various embodiments, the sizing plate **100** includes a substantially straight lower edge **111**, an arcuate upper edge **112**, and first and second side edges **113a** and **113b** extending between the substantially straight lower edge **111** and the arcuate upper edge **112**. According to some embodiments, the sizing plate **100** can also include at least one notch **114** formed in one of the edges (**111**, **112**, **113a**, **113b**) of the sizing plate **100**. In one embodiment, as shown in FIG. 2, the sizing plate **100** includes two notches **114**, each notch **114** formed in each of the first and second side edges **113a**, **113b**. The notches **114** can be used by the clinician to orient and align the sizing plate **100** with the native valve annulus.

[0045] The sizing plate **100** is sized such that it can be inserted through a minimally invasive surgical access port formed in a patient's body. According to various embodiments, the sizing plate **100** is generally planar and includes an upper planar surface **115** and a lower planar surface **116**. In some embodiments, a thickness of the sizing plate **100** defined between the upper and lower planar surfaces **115** and

116 facilitates insertion of the sizing plate **100** on its side through a narrow surgical access port. For example, in some embodiments, a thickness of the sizing plate **100** is such that it can be inserted on its side through a space between a patient's ribs. In one embodiment, the sizing plate **100** has a thickness of about 0.125 inches (0.317 cm). In other embodiments, the overall outer size and shape of the sizing plate **100** is small enough such that the sizing plate **100** need not be inserted through a minimally invasive surgical access port on its side, but rather can be inserted face-down through the surgical access port.

[0046] As shown in FIG. 2, the sizing plate **100** includes a first keyway **120a** and a second keyway **120b** extending through the sizing plate **100** from the upper surface **115** to the lower surface **116**. The two keyways **120a**, **120b** are generally centered in the sizing plate **100** and are separated from one another by a bridge **124**. The keyways **120a**, **120b** and the bridge **124** facilitate engagement of a surgical tool with the sizing plate **100**, as will be described in further detail below.

[0047] As described above, the size and shape of the keyways **120a**, **120b** facilitate engagement of the sizing plate by a minimally invasive surgical tool, e.g., a standard laparoscopic grasper. Additionally, the dimensions of the keyways **120a**, **120b** are selected so as to limit movement of the surgical tool within the keyways **120a**, **120b**, once the surgical tool is engaged with the sizing plate **100**.

[0048] As further shown, each keyway **120a**, **120b** has a generally trapezoidal shape. Thus, the shape of the keyway **120a** is defined by substantially parallel first and second sides **128a**, **132a**, and lateral sides **129a**, **133a** extending between the first and second sides **128a**, **132a**. Additionally, the keyway **120b** has substantially parallel first and second sides **128b**, **132b** and lateral sides **129b**, **133b** therebetween. In the illustrated embodiment, the sides **128a**, **128b**, **132a**, and **132b** of the keyways **120a**, **120b** are oriented substantially parallel to the major dimension D of the sizing plate **100**, and the keyways **120a**, **120b** are generally laterally centered on the sizing plate **100**.

[0049] As shown, the first sides **128a**, **128b** of the keyways **120a**, **120b** are generally narrower than the second sides **132a**, **132b**, respectively, so as to define the illustrated trapezoidal shape of the keyways **120a**, **120b**. Additionally, the bridge **124** separates the first sides **128a**, **128b** of the keyways **120a**, **120b**, and provides a structure which can be gripped by a minimally invasive grasping tool.

[0050] In some embodiments, as shown in FIG. 2, the bridge **124** is a separate member that is coupled to the sizing plate **100**. For example, in one embodiment, the bridge **124** is a bar or rod that is insert-molded into the sizing plate **100**, as will be described in more detail below. The bar or rod used to fabricate the bridge **124** can be made from a metal, metal alloy or other suitable biocompatible material. In one example, the bar or rod used to form the bridge **124** is a titanium bar or rod. The rod or bar used to form the bridge **124** can have a variety of cross-sections including round, elliptical, square, rectangular or another polygonal cross-section. In one embodiment, the rod or bar has a rectangular cross-section to facilitate an engagement of the bridge **124** by a grasping tool. The bridge **124** formed by the bar or rod has a length L corresponding to the length of the first sides **128a**, **128b** of the keyways **120a**, **120b**.

[0051] According to some embodiments, as shown in FIG. 2, the sizing plate **100** includes at least two apertures **136** in addition to the keyways **120a**, **120b**. Like the keyways **120a**,

120b, the apertures **136** extends through the sizing plate **100** from the upper surface **115** to the lower surface **116**. The apertures **136** can be provided at any location on the sizing plate **100**. In one embodiment, the apertures **136** are located at or near a bottom side edge **138** of the sizing plate **100**. According to various embodiments, a suture can be threaded through either aperture **136** such that the sizing plate **100** can be lowered and/or suspended through a surgical access port formed in the patient's body.

[0052] The sizing plates **10** and **100**, described above with reference to FIGS. 1 and 2, can be fabricated from a variety of biocompatible materials. According to some embodiments, the sizing plates **10** and **100** can be fabricated from any lightweight metal or metal alloy. For example, in one embodiment, the sizing plates **10** and **100** can be fabricated from titanium or a titanium alloy. Exemplary metal fabrication techniques that can be used to fabricate the sizing plates **10** and **100** include machining, stamping, and die-punching.

[0053] In other embodiments, the sizing plates **10** and **100** can be fabricated from a polymeric or plastic material. In one embodiment, the sizing plates **10** and **100** can be fabricated from a thermoplastic material. Exemplary thermoplastic materials suitable for use in the human body are well known in the art. In one example, the sizing plates **10** and **100** can be fabricated from a polyetherimide such as ULTEM®. In other examples polytetrafluoroethylene (PTFE or TEFLON®) or polyether ether ketone (PEEK) can be used to fabricate the sizing plates **10** and **100**. The plastic material can be formed into the sizing plates **10** and **100** using a variety of plastic fabrication techniques including injection molding. In one embodiment, the sizing plates **10** and **100** are injection molded from a thermoplastic material. In a separate step, before the thermoplastic is cured, the bridge **124**, as described with reference to FIG. 2, can be insert-molded into the sizing plate **100**. Thus, the bridge **124** is not limited to being fabricated from the same material as the sizing plates **10** and **100**, but can be selected from a different material and even a different class of material. For example, in some embodiments, the bridge **124** can be a rod or bar made from a metal or metal alloy. In another embodiment, the bridge **124** can be radiopaque.

[0054] In some embodiments, the sizing plates **10** and **100** can be fabricated such that at least a portion of the sizing plates **10** and **100** is radiopaque. In one embodiment, an entire sizing plate **10** or **100** is fabricated such that it is radiopaque. The sizing plates **10** and **100** can be made radiopaque by selecting a radiopaque material for fabrication of the sizing plate **10**, **100** or by incorporating a radiopaque material into the material used to fabricate the sizing plate **10**, **100**. By fabricating the sizing plate **10**, **100** such that at least a portion of the sizing plate **10**, **100** is radiopaque, enable the clinician to easily visualize the sizing plate **10**, **100** during the sizing procedure under standard visualization techniques including fluoroscopy and X-ray.

[0055] FIG. 3 is a schematic view of a minimally invasive surgical tool **40** engaged with the sizing plate **10** shown in FIG. 1 according to various embodiments of the present invention. The minimally invasive surgical tool **40** is engaged with the sizing plate **10** to manipulate the sizing plate **10** within a valve annulus or other anatomical structure. The minimally invasive surgical tool **40** facilitates manipulation of the sizing plate **10** from a location external the patient's body under standard visualization techniques. External manipulation of the sizing plate **10** may facilitate easier posi-

tioning and rotation of the sizing plate in the body which may result in a more accurate assessment of the shape and size of the valve annulus or other anatomical structure.

[0056] Various commercially available, minimally invasive surgical tools may be used with the sizing plate **10**. In some embodiments, the minimally invasive surgical tool **40** is a laparoscopic grasper. Such laparoscopic graspers are commercially available from a number of different manufacturers and come in a variety of sizes. A grasper facilitates easy manipulation of the sizing plate from an external location. In one embodiment, the minimally invasive surgical tool **40** is a 5 mm grasper.

[0057] As shown in FIG. 3, the working ends **44a**, **44b** of the surgical tool **40**, such as, for example, a grasper are inserted into each of the keyways **20a**, **20b**. As discussed above, the keyways **20a**, **20b** can be shaped and sized to accommodate insertion of the working ends **44a**, **44b** of various minimally invasive surgical tools into engagement with the sizing plate **10**. The thickness of the sizing plate **10** and the length **L** and, in some embodiments, the cross-section of the bridge **24** also facilitate engagement of the surgical tool with the plate by providing a sufficient structure for which the working ends **44a**, **44b** of the tool **40** can grasp. Additionally, in one embodiment, a length **L** of the bridge **24** provided between the two keyways **20a**, **20b**, can be slightly greater than a maximum width of each working end **44a**, **44b** of the surgical tool **40** to be engaged with the sizing plate **10**. For example, in one embodiment, if the maximum width of each working end **44a**, **44b** of the grasper is 5 mm, then the length **L** of the bridge **24** can be approximately 6 mm.

[0058] FIG. 4 is a schematic view of a set **50** of sizing plates **10** according to an embodiment of the present invention. The set **50** includes one or more sizing plates **10** of increasing size having the same general shape. According to various embodiments, a maximum height of each plate (corresponding to the minor dimension **d** of the respective plate) ranges from about 0.657 to about 1.004 inches (from about 1.67 to about 2.55 cm), and a maximum width of each plate (corresponding to the major dimension **D** of the respective plate) ranges from about 1.020 to about 1.571 inches (from about 2.59 to about 4 cm). In some embodiments, each plate **10** can include a size indicator **54** such as, for example, a number laser-etched, stamped embossed or pad-printed on a plate face **56** indicating the size of the sizing plate **10**. In one embodiment, the size indicator **54** can be stamped or pad-printed in radiopaque ink. Table 1 indicates the maximum height and width corresponding to different plate sizes. The maximum height and width are provided in inches (where 1 inch=2.54 cm).

TABLE 1

Plate Size	Max. Height (Minor Dimension d)	Max. Width (Major Dimension D)
24	0.657	1.020
26	0.714	1.098
28	0.762	1.176
30	0.813	1.256
32	0.862	1.334
34	0.910	1.412
36	0.960	1.493
38	1.004	1.571

[0059] Among a given set **50** of sizing plates **10**, the size and shape of the keyways **20** provided in each of the plates **10** remain the same such that they are able to engage with the

same size of a minimally invasive surgical tool **40**. The set **50** of sizing plates **10** may be provided with or without a minimally invasive surgical grasper tool **40**.

[0060] A method of using the sizing plate **10** according to the various embodiments discussed above will now be described in reference to FIG. 1. During a minimally invasive surgical procedure to repair or replace a diseased native valve such as the aortic or mitral valve, the surgeon performing the procedure creates a surgical access port in an intercostal space in the patient's body. The surgeon may also create an access port via a mini-sternotomy whereby a piece of the sternum and its corresponding rib are transected to create more space. A selected sizing plate **10** can then be inserted on its side through the access port. In some embodiments, a suture can be inserted through the aperture **36** provided in the plate and can be used to lower the sizing plate **10** on its side through the port. In some embodiments, the suture can be used to temporarily suspend the sizing plate **10** through the access port at the surgical site until the sizing plate **10** is ready for use. Next, the surgeon retracts or excises the valve leaflets using standard techniques to expose the valve annulus. A grasper or other minimally invasive surgical tool **40** capable of engaging the sizing plate **10** is then inserted through the surgical access port and is engaged with the sizing plate **10**. The surgical tool **40** is used to position and rotate the sizing plate **10** in the valve annulus such that the size and shape of the valve annulus can be accurately assessed under standard visualization techniques. The surgical tool **40** facilitates external manipulation of the sizing plate in the valve annulus. If the sizing plate **10** is too small or too large when compared to the valve annulus, the sizing plate **10** can be retrieved and removed from the patient's body. In one embodiment, the suture threaded through the aperture **16** provided in the sizing plate **10** is used to remove the sizing plate from the patient's body. A sizing plate **10** of a smaller or larger size is then selected, and the process is repeated until the size of the valve annulus is determined. Once the size of the valve annulus has been determined, the surgeon can proceed with repairing or replacing the valve.

[0061] Various modifications and additions can be made to the exemplary embodiments discussed without departing from the scope of the present invention. For example, while the embodiments described above refer to particular features, the scope of this invention also includes embodiments having different combinations of features and embodiments that do not include all of the above described features.

We claim:

1. A method of sizing a native valve annulus during a minimally invasive mitral valve repair or replacement procedure comprising:

creating a surgical access port in an intercostal space in a patient's body;
exposing the native valve annulus;
inserting a first sizing plate through the surgical access port, the first sizing plate including: an upper surface and a lower surface defining a thickness of the sizing plate; first and second keyways extending through the sizing plate from the upper planar surface to the lower planar surface of the sizing plate; and a bridge member between the first and second keyways configured to be engaged by a laparoscopic grasping tool;

engaging the bridge of the sizing plate using a laparoscopic grasping tool inserted through the surgical access port; positioning the sizing plate in the valve annulus; comparing the major and minor dimensions and the shape of the sizing plate to a major and a minor dimension and shape of an anterior leaflet of the mitral valve; and determining the major and minor dimensions and shape of the anterior leaflet of the mitral valve.

2. The method according to claim 1, further comprising the steps of:

removing the first sizing plate from the patient's body;
inserting a second sizing plate through the surgical access port, the second sizing plate comprising a major dimension and a minor dimension and a shape generally corresponding to the shape of an anterior leaflet of the native mitral valve; an upper planar surface and a lower planar surface defining a thickness of the sizing plate; and a first keyway and a second keyway to facilitate engagement of a grasping tool with the sizing plate, the first and second keyways generally centered on the sizing plate and extending through the sizing plate from the upper planar surface to the lower planar surface of the sizing plate;

engaging a bridge of the second sizing plate using a laparoscopic grasping tool inserted through the surgical access port;

positioning the second sizing plate in the valve annulus; comparing the major and minor dimensions and the shape of the second sizing plate to a major and a minor dimension and shape of an anterior leaflet of the mitral valve; and

determining the major and minor dimensions and shape of the anterior leaflet of the mitral valve.

3. The method according to claim 1, further comprising the step of temporarily suspending the first sizing plate through the access port.

4. The method according to claim 1, further comprising the step of orienting the first sizing plate on an edge when inserting the first sizing plate through the surgical access port.

5. The method according to claim 2, further comprising the step of orienting the second sizing plate on an edge when inserting the second sizing plate through the surgical access port.

6. The method according to claim 1, wherein the first sizing plate is D-shaped.

7. The method according to claim 2, wherein the second sizing plate is D-shaped.

8. The method according to claim 1, wherein the first sizing plate has a shape corresponding to a shape of an anterior leaflet of a native mitral valve.

9. The method according to claim 1, wherein the first sizing plate has a shape corresponding to a shape of an anterior leaflet of a native mitral valve.

10. The method according to claim 1, wherein the bridge member comprises a bar coupled to the first sizing plate.

11. The method according to claim 1, wherein at least a portion of the first sizing plate is radiopaque.

12. The method according to claim 2, wherein at least a portion of the second sizing plate is radiopaque.

专利名称(译)	用于微创手术的瓣膜成形术		
公开(公告)号	US20140046219A1	公开(公告)日	2014-02-13
申请号	US14/055661	申请日	2013-10-16
[标]申请(专利权)人(译)	索林集团美国		
申请(专利权)人(译)	索林集团USA , INC.		
当前申请(专利权)人(译)	索林集团USA , INC.		
[标]发明人	SAUTER JOSEPH A HARGROVE III W CLARK		
发明人	SAUTER, JOSEPH A. HARGROVE, III, W. CLARK		
IPC分类号	A61B5/107 A61B17/00 A61B6/12 A61B5/00		
CPC分类号	A61B5/1076 A61B6/12 A61B17/00234 A61B5/4836 A61F2/2496 A61F2250/0098		
优先权	61/163732 2009-03-26 US		
其他公开文献	US9149207		
外部链接	Espacenet	USPTO	

摘要(译)

示出并描述了用于在微创外科手术过程中用于瓣膜置换或修复的用于确定患者心脏中的自体瓣膜环的尺寸的定尺寸板。精整板通常成形为使得其对应于自体瓣膜环的形状。另外，定型板的厚度使得它可以在手术期间插入患者肋骨之间的空间。尺寸调整板包括两个键槽，这两个键槽延伸穿过由桥隔开的板。键槽的尺寸和形状使得它们适于通过诸如腹腔镜抓握器的微创手术工具接合。与桥相结合的键槽便于抓紧器从外部位置操纵尺寸调整板。

